

HA12237F

Audio Signal Processor for Cassette Deck

REJ03F0137-0100
(Previous: ADE-207-343)
Rev.1.00
Jun 15, 2005

Description

HA12237F is silicon monolithic bipolar IC providing PB equalizer, REC equalizer system, ALC and each electronic control switch in one chip.

Functions

- PB equalizer × 2 channel
- REC equalizer × 2 channel
- ALC (Automatic Level Control)
- REC mute
- REC head return switch
- Line Amp. × 2 channel
- Line mute

Features

- REC equalizer is very small number of external parts built-in 2 types of frequency characteristics.
- TYPE I REC correspondence, High-speed dubbing correspondence.
- PB equalizer circuit built-in 2 types of frequency characteristics. (external parts of capacitor only)
- Head control switch built-in.
- Line mute switch built-in.
- Controllable from direct micro-computer output.

Parallel Data Format

Pin No.	Pin Name	Lo	Hi
11	ALC ON/OFF	ALC OFF	ALC ON
12	High/Norm	Normal speed	High speed
13	A/B	B	A
	REC Return ON/OFF	Return OFF	Return ON
14	MUTE ON/OFF	MUTE OFF	MUTE ON
15	REC MUTE OFF/ON	REC MUTE ON	REC MUTE OFF

Pin Description, Equivalent Circuit

($V_{CC} = 12\text{ V}$, $T_a = 25^\circ\text{C}$, No Signal, The value in the table shows typical value.)


Pin No.	Pin Name	Note	Equivalent Circuit	Description
16	V_{CC}	$V = V_{CC}$		V_{CC} pin
21	RECOUT(L)	$V = V_{CC}/2$		REC output
10	RECOUT(R)			PB output
26	PBOUT(L)			
5	PBOUT(R)			
28	EQOUT(L)			$V = 2.9\text{ V}$
3	EQOUT(R)			
35	REC-RETURN	$V = 0\text{ V}$		REC Return
34	BIN(L)			PB B deck input
37	BIN(R)			
32	AIN(L)	$V = 0\text{ V}$		PB A deck input
39	AIN(R)			
24	RECIN(L)	$V = V_{CC}/2$		REC-EQ input
7	RECIN(R)			
27	TAI(L)			
4	TAI(R)			
11	ALC ON/OFF	(Control voltage = 3 V)		Mode control input
12	High/Norm			
13	A/B			
14	MUTE ON/OFF			
15	REC MUTE OFF/ON			
19	IREF	$V = 1.2\text{ V}$		Equalizer reference current input

Pin Description, Equivalent Circuit (cont.)

($V_{CC} = 12\text{ V}$, $T_a = 25^\circ\text{C}$, No Signal, The value in the table shows typical value.)

Pin No.	Pin Name	Note	Equivalent Circuit	Description
18, 36	GND			GND pin
6, 9, 22, 25, 38	NC			NC pin
20	Test mode			Test mode pin
31	PB-NF1(L)	V = 0.6 V		PB EQ feed back
40	PB-NF1(R)			
30	PB-NF2(L)			
1	PB-NF2(R)			
33	RIP	V = $V_{CC}/2$		Ripple filter
29	PB-EQ(L)			NAB output
2	PB-EQ(R)			

Block Diagram

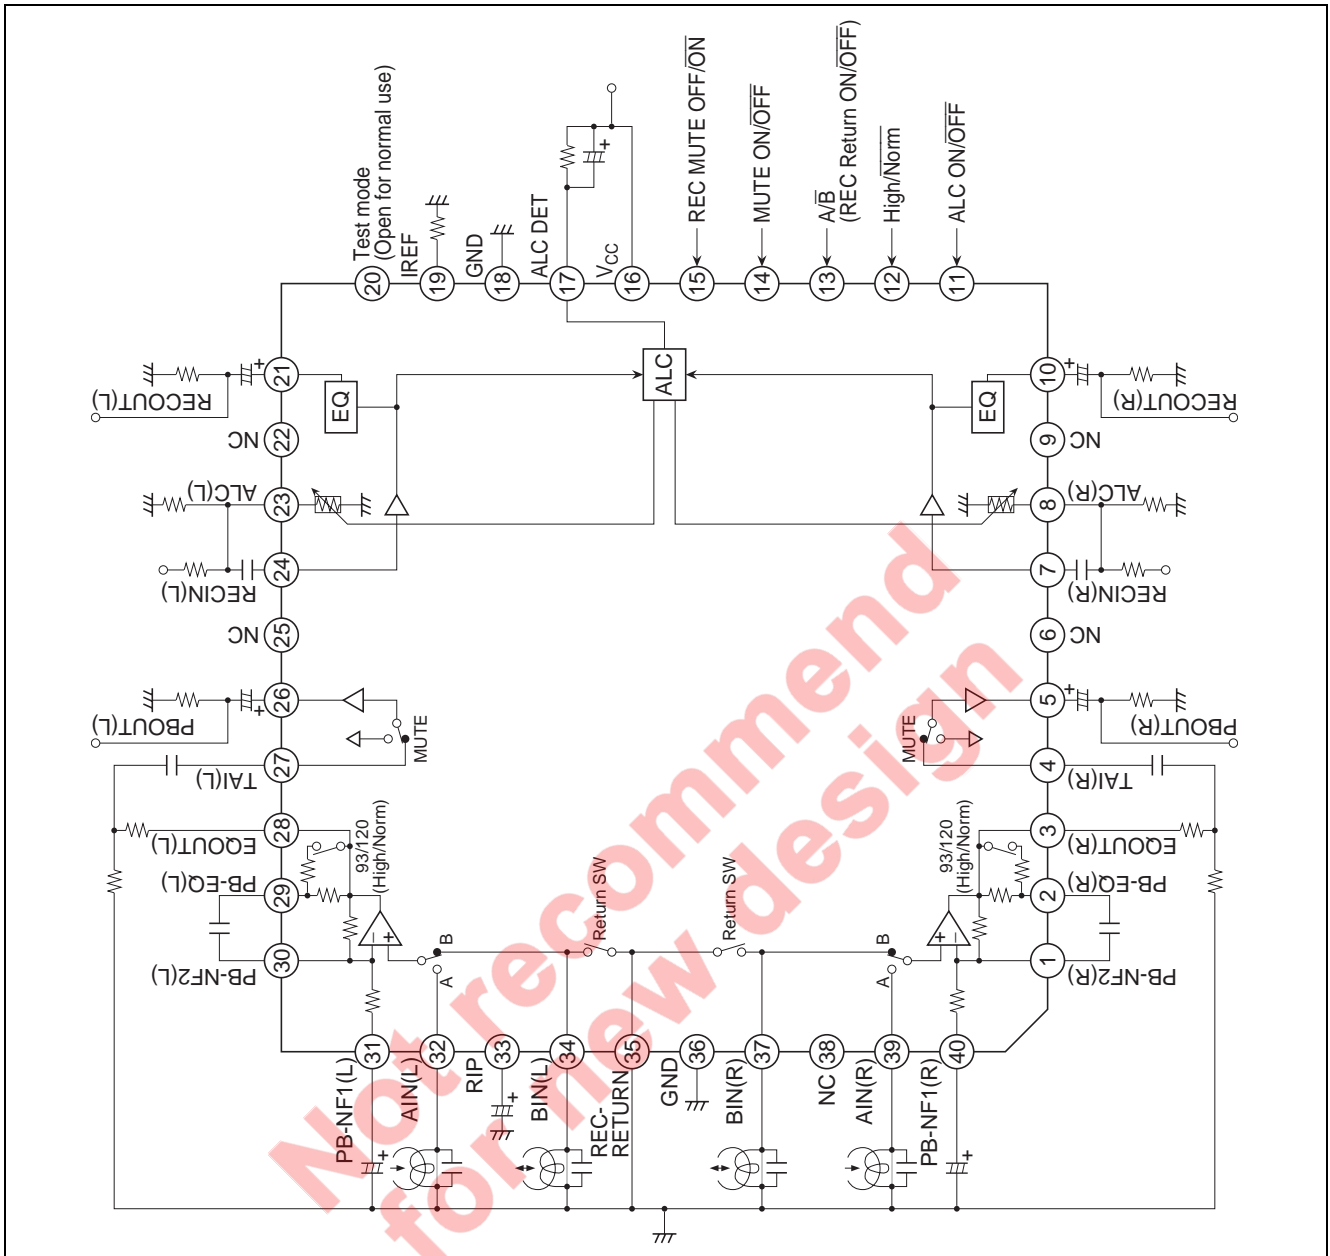

Functional Description

Power Supply Range

This IC designed to operate on single supply, shown by table 1.

Table 1 Supply Voltage

Item	Power Supply Range
Single supply	6.5 V to 15.0 V

Reference Voltage

This device provide the reference voltage of half the supply voltage that is the signal grounds. As the peculiarity of this device, the capacitor for the ripple filter is very small about 1/100 compared with their usual value. The block diagram is shown as figure 1.

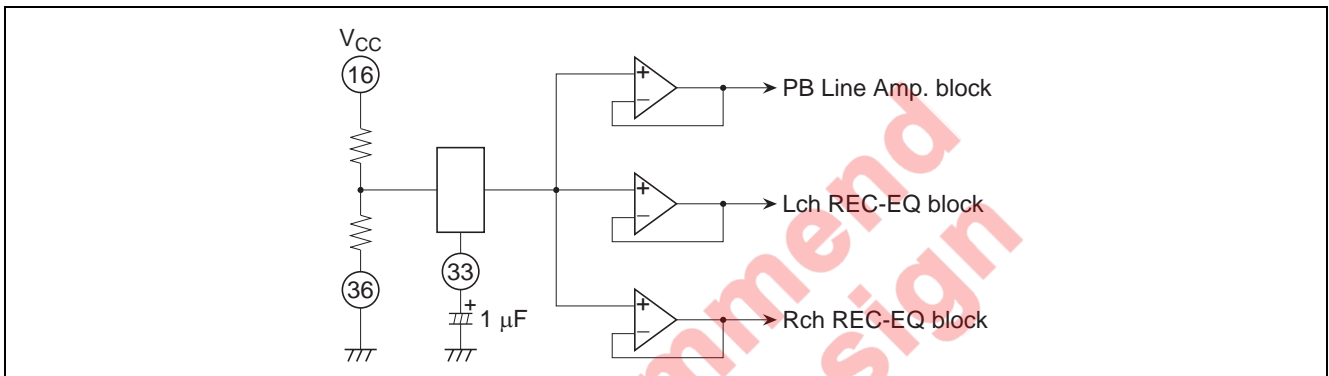


Figure 1 Block Diagram of Reference Supply Voltage

Operating Mode Control

HA12235F provide fully electronic switching circuits. And each operating mode control is controlled by parallel data (DC voltage).

Table 2 Threshold Voltage (V_{TH})

Pin No.	Lo	Mid	Hi	Unit	Test Condition
11 to 15	-0.2 to 0.5	—	2.4 to V_{CC}	V	Input Pin Measure

Notes: 1. Each pins are on pulled down with 100 kΩ internal resistor. Therefore, it will be low-level when each pins are open.

2. Over shoot level and under shoot level of input signal must be the standardized.
 (High: V_{CC} , Low: -0.2 V)

Test Mode

Test mode becomes when pin 20 is shorted to GND. Please open pin 20 on the occasion of mount.

Block Diagram

As this IC is built-in REC return switch, the configuration system can be simple system using a few external component and the REC/PB head.

About these logics, please look at the Parallel Data Format.

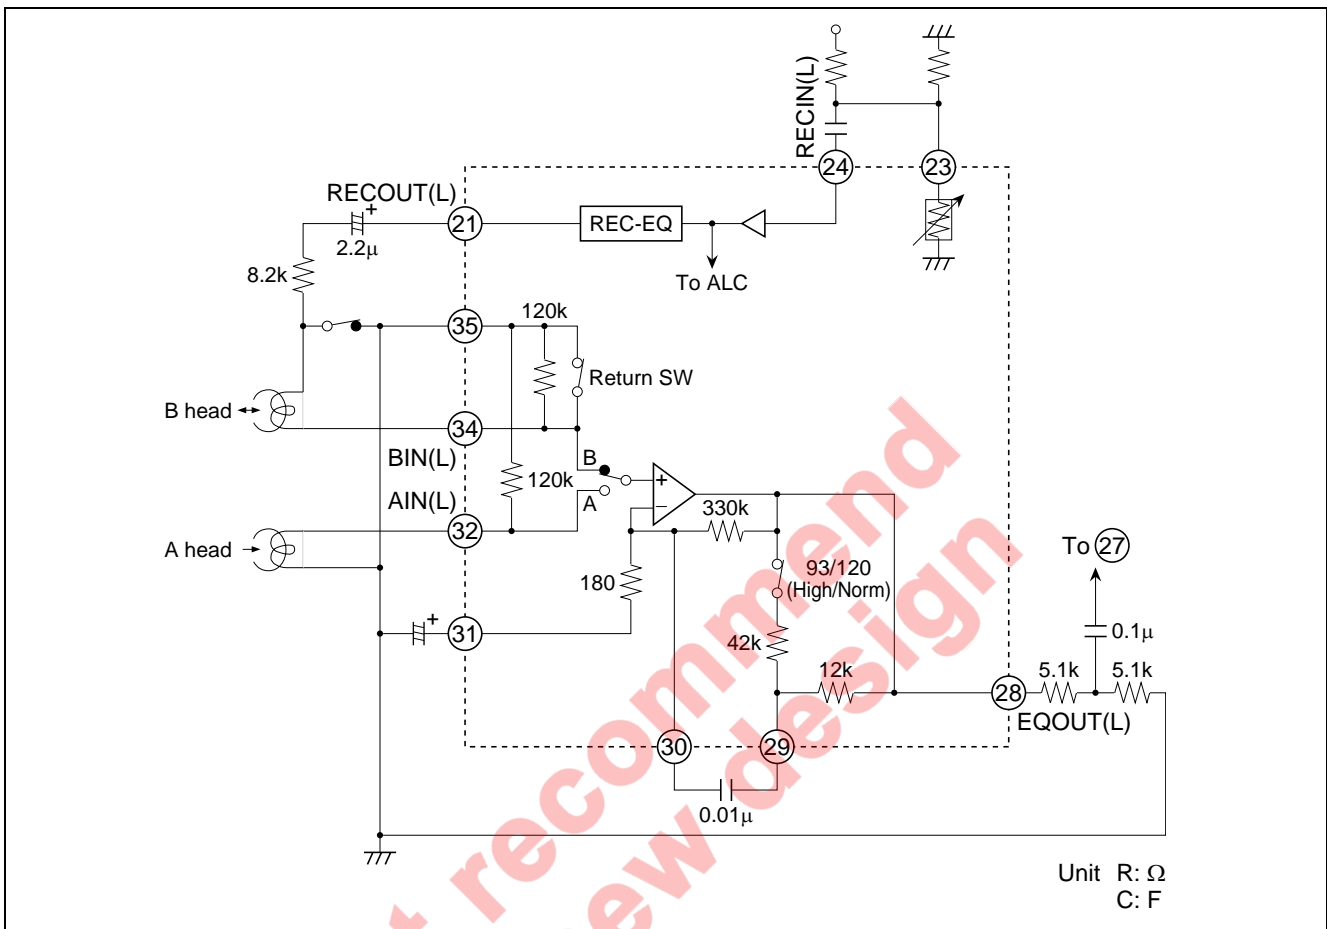


Figure 2 Block Diagram (Lch)

PB Equalizer

The gain establishment of PB-EQ considers PB output level {(internal Line Amp. + PB Amp.) = 580 mVrms} like figure 3 at the target.

After replace RA and RB with a half-fix volume, adjust level.

REC-EQ adjust the gain in front of input to this IC.

The level digram of 1 kHz is shown figure 3.

Please set “RA + RB ≥ 10 kΩ”

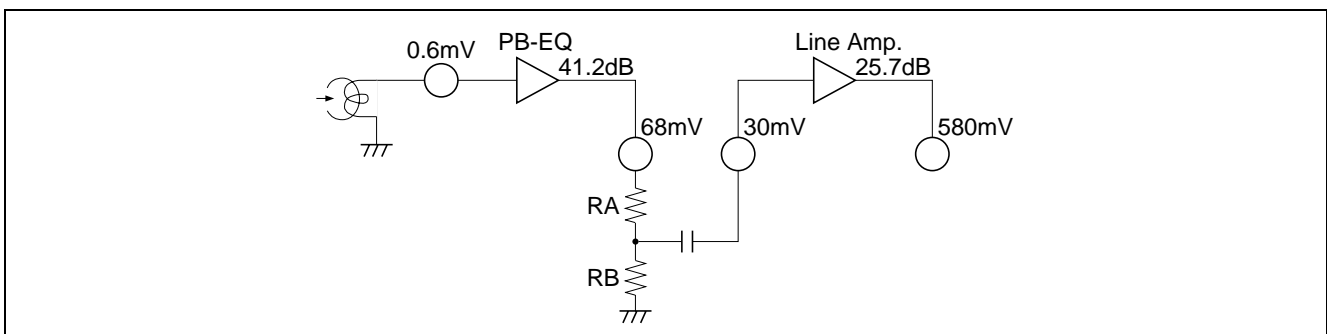


Figure 3 PB System Level Diagram (1 kHz)

Line Mute

This IC is built-in with mute circuit to Line Amp.

A mute control does with Low/High of pin 14.

Reducing pop noise is so much better 10 kΩ to 22 kΩ resistor to pin 14 in series and 1 μF to 22 μF capacitor.

A mute is not built-in when doing a power ON/OFF.

Please correspond to it, on the side of a set system.

REC Equalizer

REC-EQ gain adjust before the input of this IC.

R_L needs the value more than 5.6 kΩ based on the output at reference input.

Because mode establishment resistances are built-in, REC-EQ frequency characteristics are respectively fixed value.

In vase the change of the frequency characteristics are necessary, please inquire the responsible agent because the adjustment of resistors is necessary.

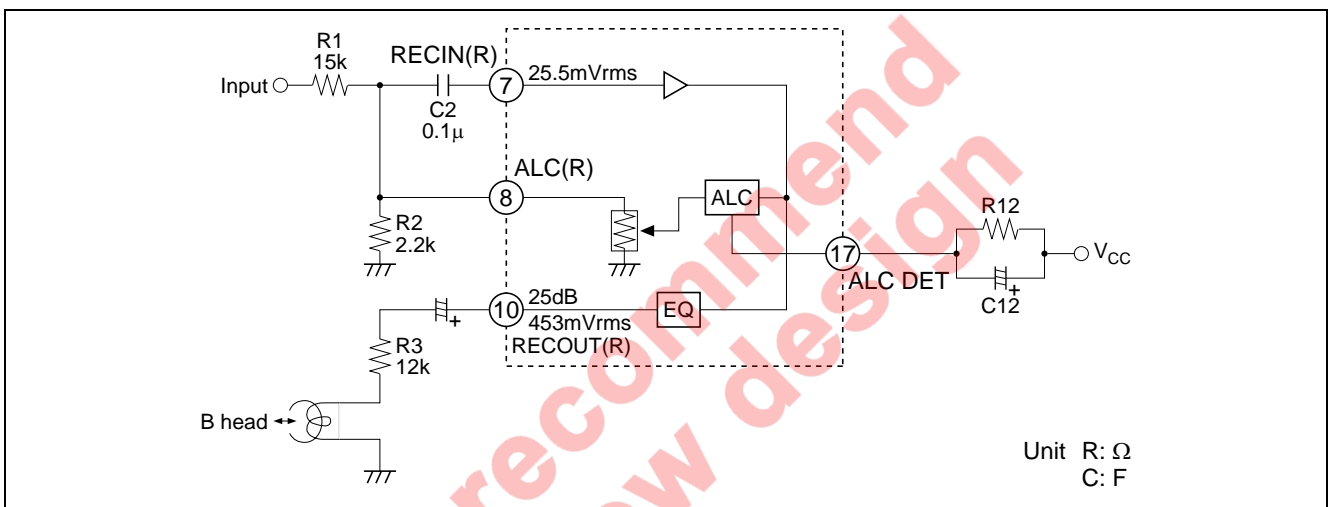


Figure 4 REC-EQ Block Diagram

ALC (Automatic Level Control)

ALC is the input decay rate variable system. It has internal variable resistors of pin 8 (pin 23) by REC signal that is inputted to pin 7 (pin 24).

Pin 17 is detector pin.

The signal input pin is pin 7 (pin 24). Resistor R1, R2 and capacitor C2, external components, for the input circuit are commended as figure 4. There are requested to use value of the block diagram figure for performance maintenance of S/N, T.H.D. etc.

Figure 5 shows the relation with R1 and C1 front input point and RECOU.T.

ALC operation level acts for the center of +4.5 dB to standard level (453 mVrms).

Then, adopted maximum value circuit, ALC is operated by a large channel of signal.

ALC ON/OFF can switch it by pin 11. Please do ALC ON, after it does for one time ALC OFF inevitably, for ALC time to start usefully, in order to reset ALC circuit.

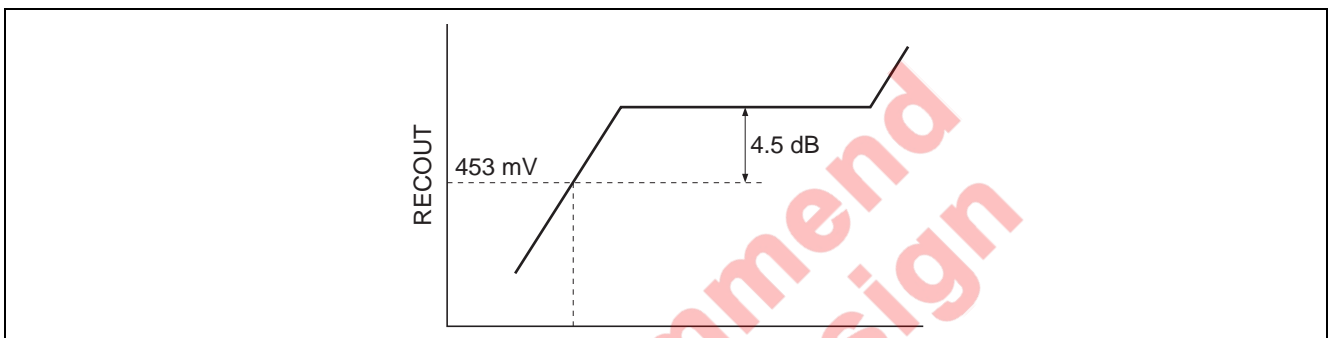


Figure 5 ALC Operation Level

Not recommended
for new design

Absolute Maximum Ratings

(Ta = 25°C)

Item	Symbol	Rating	Unit	Note
Maximum supply voltage	V _{CC} Max	16	V	
Power dissipation	P _T	625	mW	Ta ≤ 75°C
Operating temperature	T _{opr}	-40 to +75	°C	
Storage temperature	T _{stg}	-55 to +125	°C	
Operating voltage	V _{opr}	6.5 to 15	V	

Note: HA12235F operates on single supply voltage.

Not recommend
for new design

Electrical Characteristics

(Ta = 25°C, V_{CC} = 12 V, PB-EQIN Standard level = 0.6 mVrms at 1 kHz, TAI Standard level = 30 mVrms, PBOUT Standard level = 580 mVrms)

Item	Symbol	IC Condition				Test Condition				Specification			Application Terminal			
		A/B	High/ Norm	ALC ON/OFF	Vin (mVrms)	fin (Hz)	Other	Min	Typ	Max	Unit	Input		Output		
												R	L	R	L	
Quiescent current	I _Q	A	Norm	OFF	—	—	No signal	—	12.2	20.2	mA	—	—	—	16	
Logical threshold	V _{IL} V _{IH}	—	—	—	—	—	—	—	—	0.5	V	—	—	—	11 to 15	
PB-REC crosstalk	GT PB/REC(1)	A	Norm	OFF	—	1k	REC-EQ→PB-EQ	50.0	60.0	—	dB	7	24	3	28	
	GT PB/REC(2)	A	Norm	OFF	6.0	1k	PB-EQ→REC-EQ	60.0	70.0	—	dB	39	32	10	21	
PB-EQ gain	GV PB(1)	A/B	Norm	OFF	0.6	1k	—	37.4	40.4	43.4	dB	39/37	28/29	3	28	
	GV PB(2)	A	Norm	OFF	0.6	10k	—	33.3	36.3	39.3	dB	39	32	3	28	
	GV PB(3)	A	High	OFF	0.6	20k	—	31.2	34.2	37.2	dB	39	32	3	28	
PB-EQ maximum output level	Vomax PB	A	Norm	OFF	—	1k	THD = 1%	0.3	0.6	—	Vrms	39	32	3	28	
PB-EQ T.H.D.	THD PB	A/B	Norm	OFF	2.4	1k	—	—	0.2	0.5	%	39/37	28/29	3	28	
PB-EQ noise voltage	VN PB	A/B	Norm	OFF	—	—	Rg = 680Ω, DIN-AUDIO	—	110	200	μVrms	39/37	28/29	3	28	
PB-EQ channel separation	CT R/L(1)	A	Norm	OFF	6.0	1k	—	50.0	60.0	—	dB	39	32	3	28	
PB-EQ crosstalk	CT A/B	A/B	Norm	OFF	6.0	1k	—	60.0	70.0	—	dB	39/37	28/29	3	28	
Line Amp. gain	G _v LA	A	Norm	OFF	30.0	1k	—	24.2	25.7	27.2	dB	4	27	5	26	
Line Amp. T.H.D.	THD LA	A	Norm	OFF	30.0	1k	—	—	0.05	0.30	%	4	27	5	26	
Line Amp. maximum output level	Vomax LA	A	Norm	OFF	—	1k	THD = 1%	1.16	1.40	—	Vrms	4	27	5	26	
Line mute attenuation	L-MUTE ATT	A	Norm	OFF	120.0	1k	—	70.0	80.0	—	dB	4	27	5	26	

Notes: 1. Large level without clipping
2. V_{CC} = 6.5V

Electrical Characteristics (cont.)


(Ta = 25°C, V_{CC} = 12 V, RECI Standard level = 200 mVrms (IC in Level = 25.5 mVrms) = 0 dB

Item	Symbol	Test Condition						Specification			Application Terminal				
		IC Condition		fin (Hz)	Vin (mVrms)	Other	Min	Typ	Max	Unit	Input		Output		COM Remark
		A/B	High/Norm								R	L	R	L	
		A	ON/OFF	1k	+12		2.0	4.5	7.0	dB	7	24	10	21	—
ALC operate level	ALC	A	Norm	1k	+12		2.0	4.5	7.0	dB	7	24	10	21	—
REC-EQ frequency characteristics	GV REC-NN1	A	Norm	1k	-26		23.5	25.0	26.5	dB	7	24	10	21	—
Normal speed	GV REC-NN2	A	Norm	5k	-26		26.9	28.9	30.9	dB	7	24	10	21	—
	GV REC-NN3	A	Norm	10k	-26		33.2	35.7	38.2	dB	7	24	10	21	—
REC-EQ frequency characteristics	GV REC-HN1	A	High	2k	-26		23.4	24.9	26.4	dB	7	24	10	21	—
High speed	GV REC-HN2	A	High	10k	-26		26.5	28.5	30.5	dB	7	24	10	21	—
	GV REC-HN3	A	High	20k	-26		33.4	35.9	38.4	dB	7	24	10	21	—
REC-EQ channel separation	CT R/L(2)	A	Norm	1k	*1		61.0	70.0	—	dB	7	24	10	21	—
REC-MUTE attenuation	R-MUTE ATT	A	Norm	1k	*1		66.0	76.0	—	dB	7	24	10	21	—
REC-EQ maximum output level	Vomax REC	A	Norm	1k	—	THD = 1%	0.7	1.0	—	Vrms	7	24	10	21	*2
REC-EQ T.H.D.	THD REC	A	Norm	1k	0		—	0.2	0.5	%	7	24	10	21	—
REC-EQ S/N	S/N REC	A	Norm	1k	—	Rg = 2.2kΩ, A-WTG	55.0	59.0	—	dB	—	—	10	21	—

Notes: 1. Large level without clipping

2. V_{CC} = 6.5V



Test Circuit


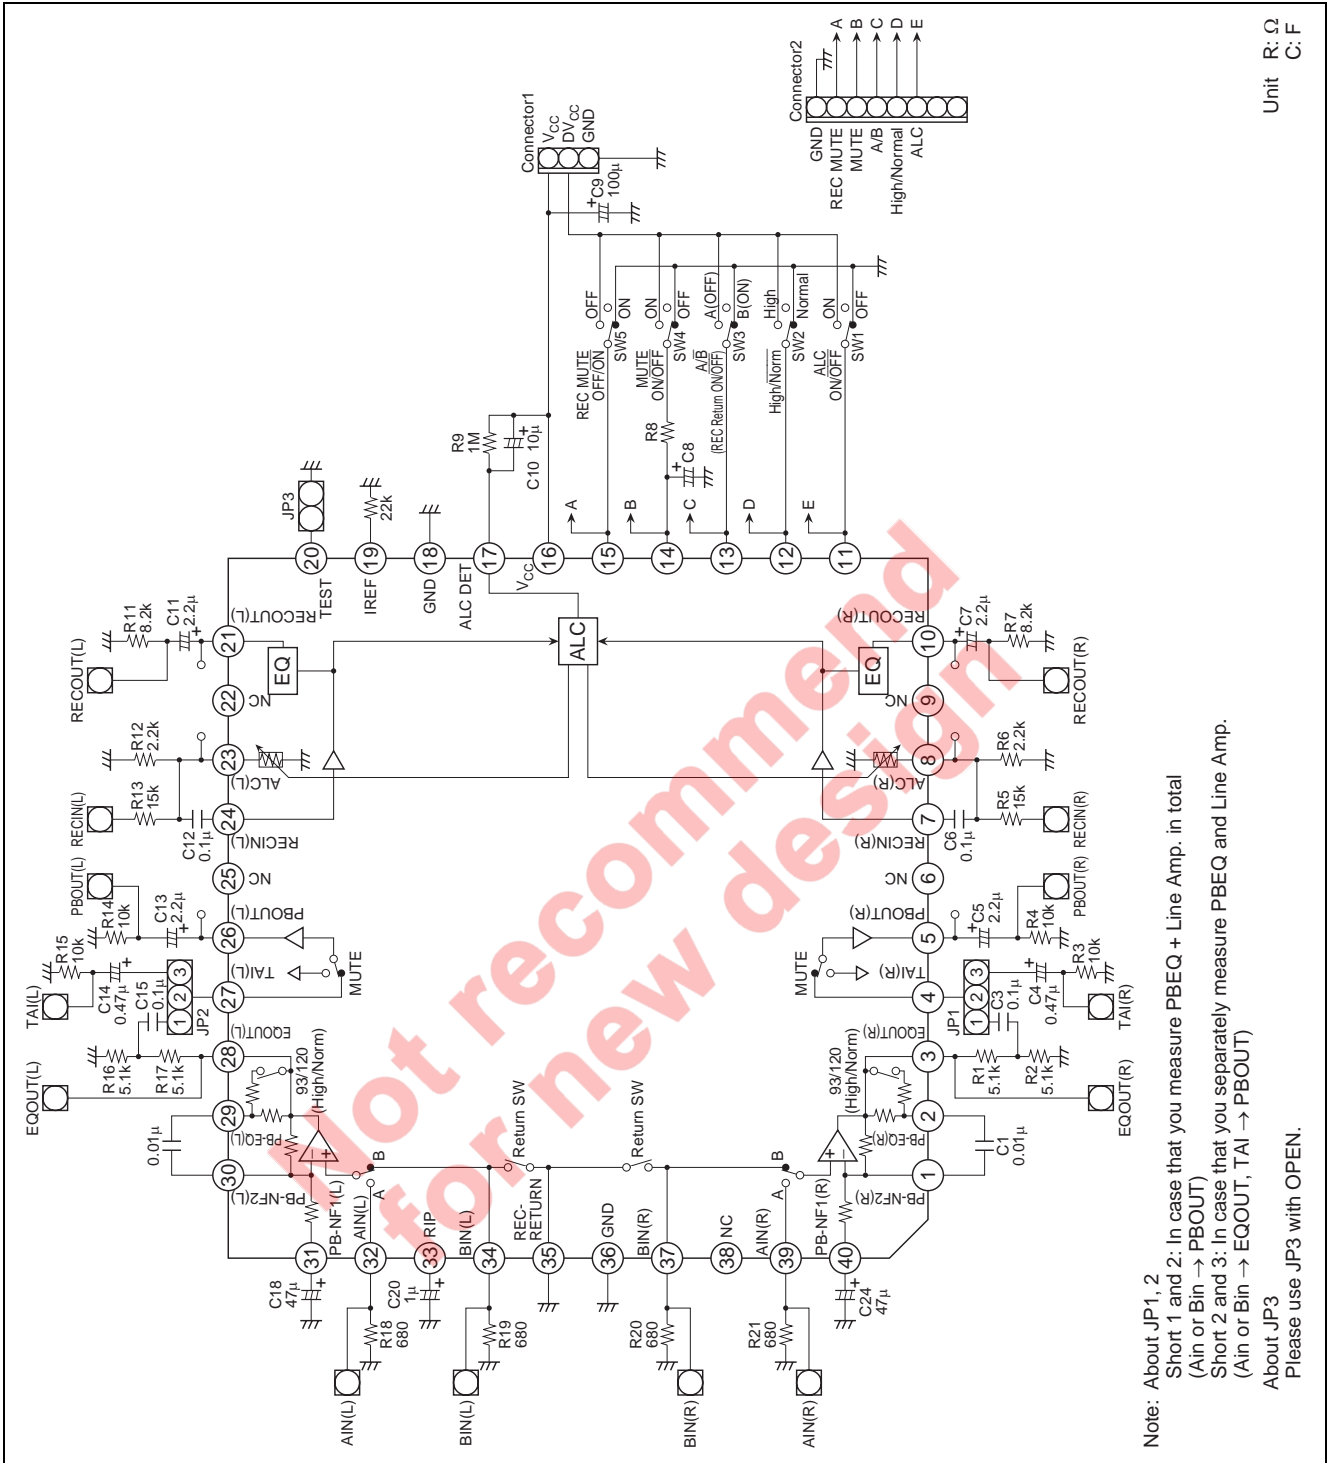




Unit R: Ω
C: F



Note: About JP1, 2
 Short 1 and 2: In case that you measure PBEQ + Line Amp. in total
 (Ain or Bin → PBOUT)
 Short 2 and 3: In case that you separately measure PBEQ and Line Amp.
 (Ain or Bin → EQOUT, TAI → PBOUT)
 About JP3
 Please use JP3 with OPEN.



Characteristic Curves

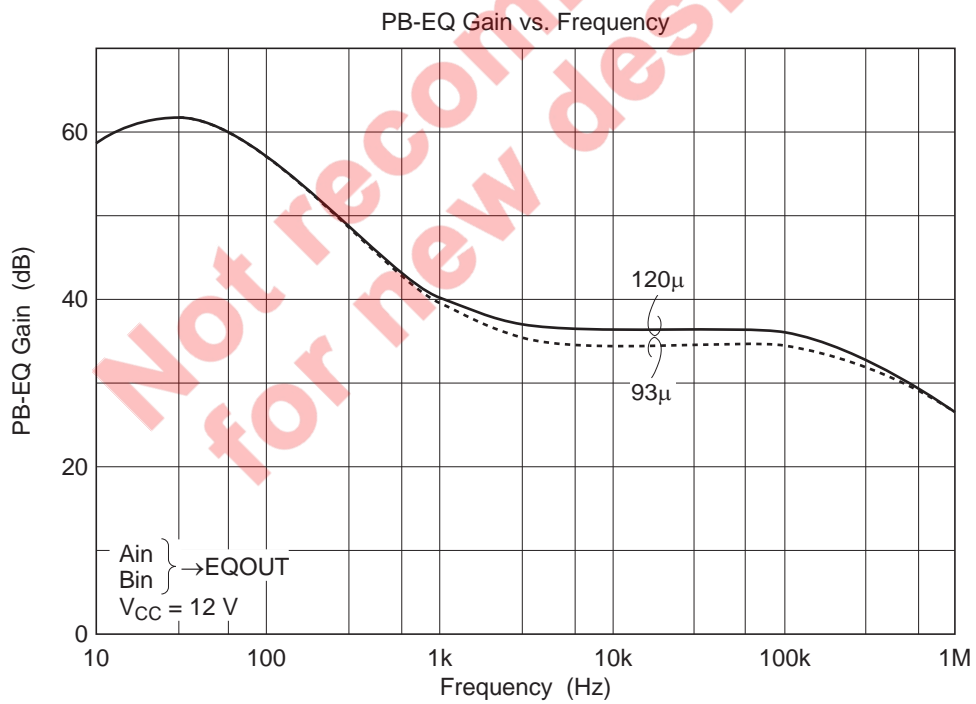
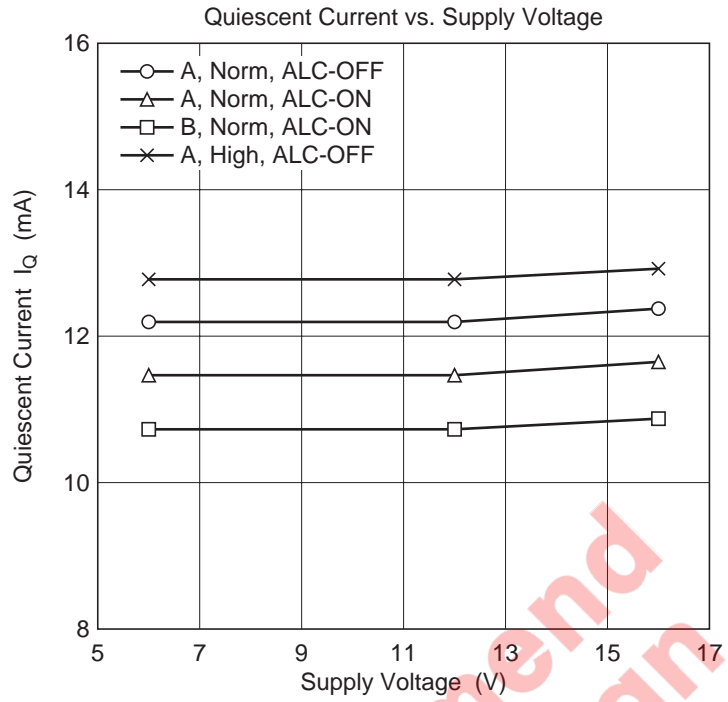


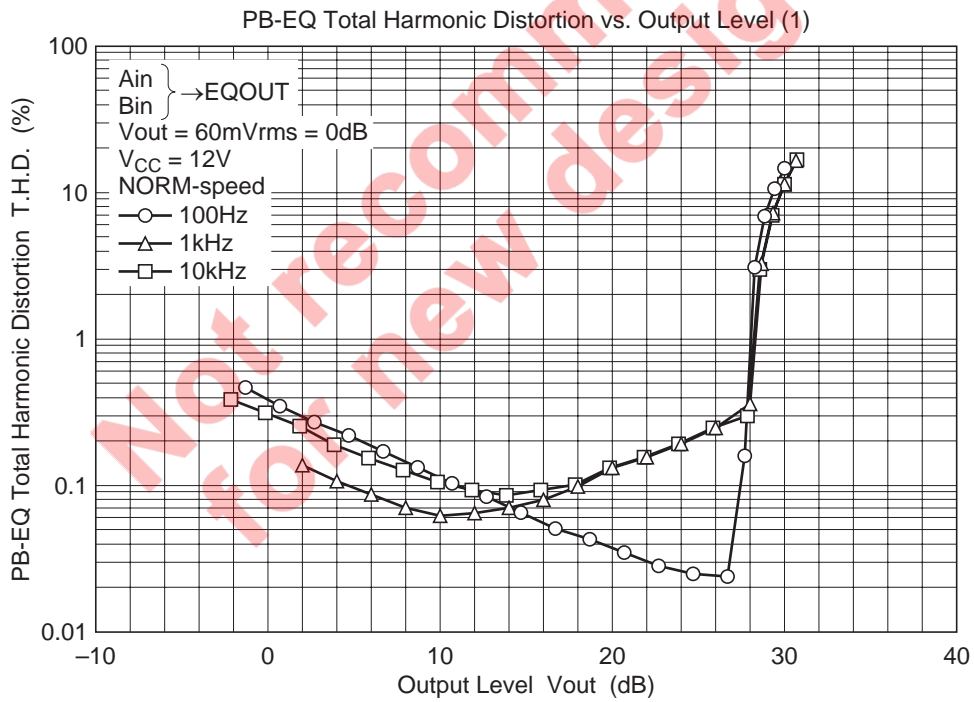
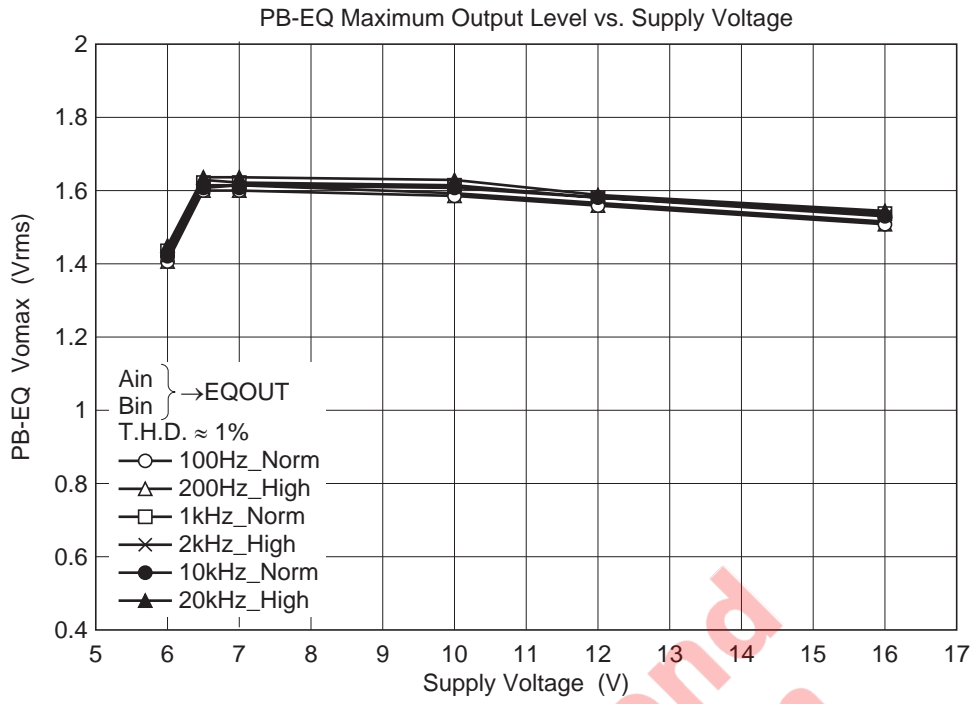


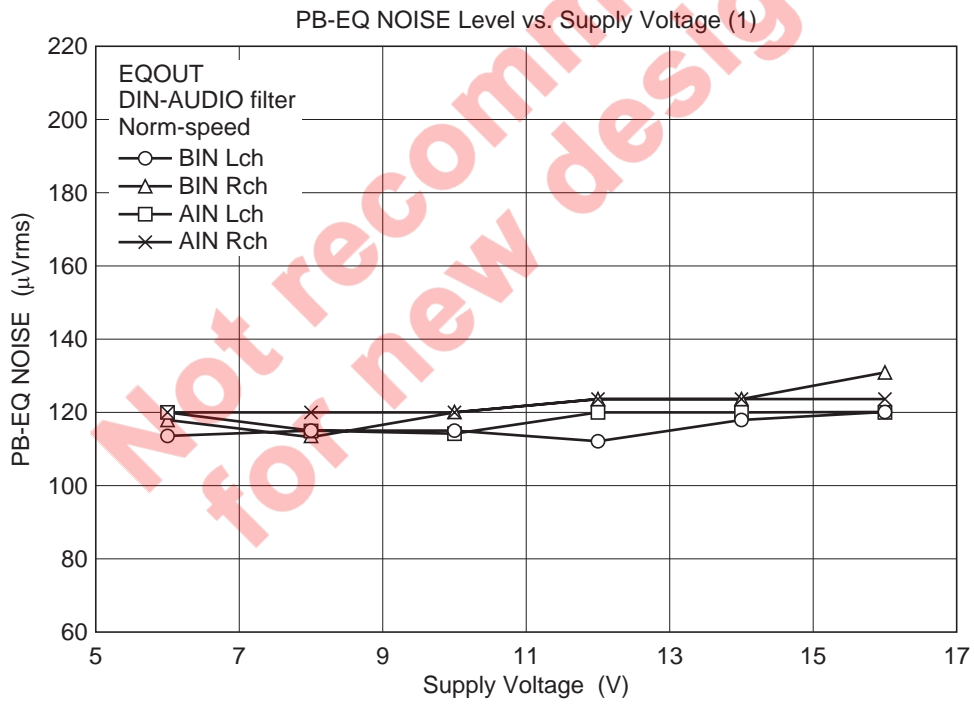
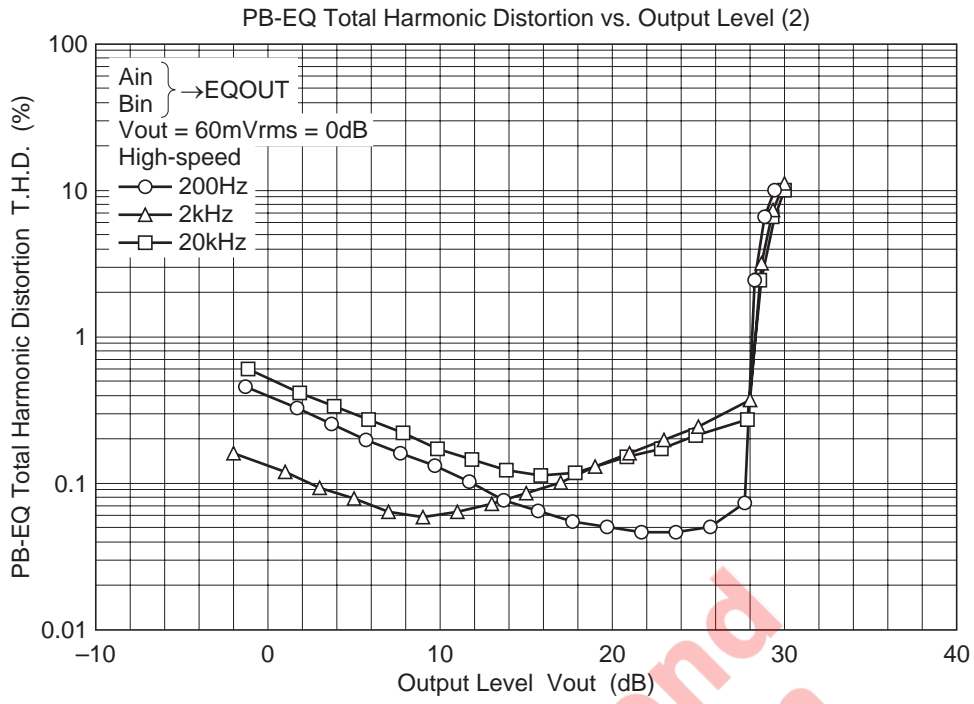


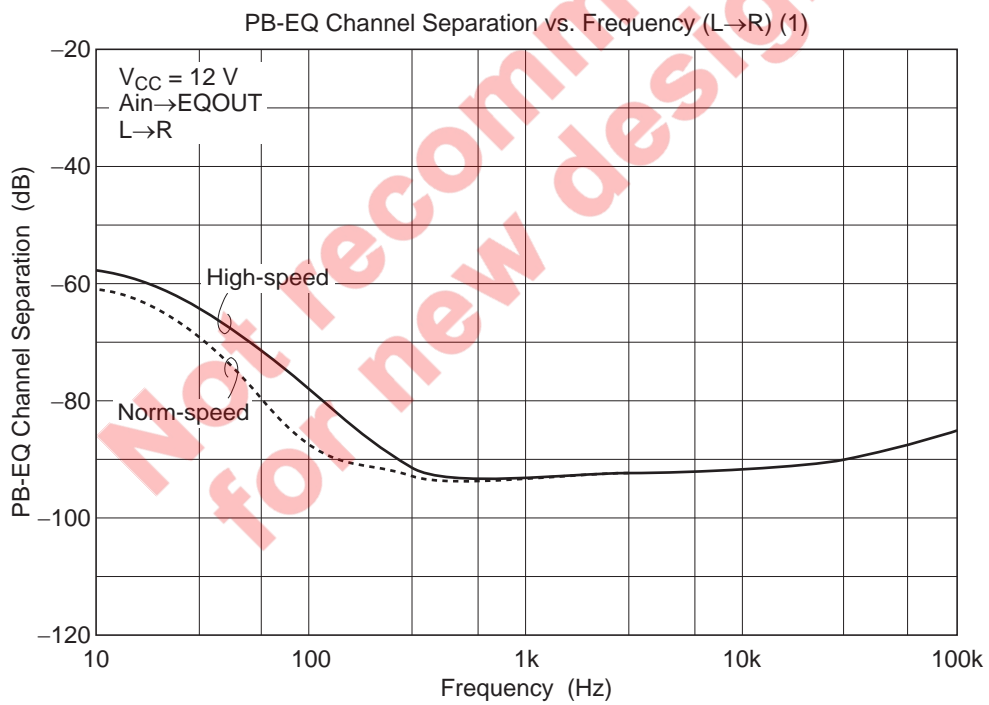
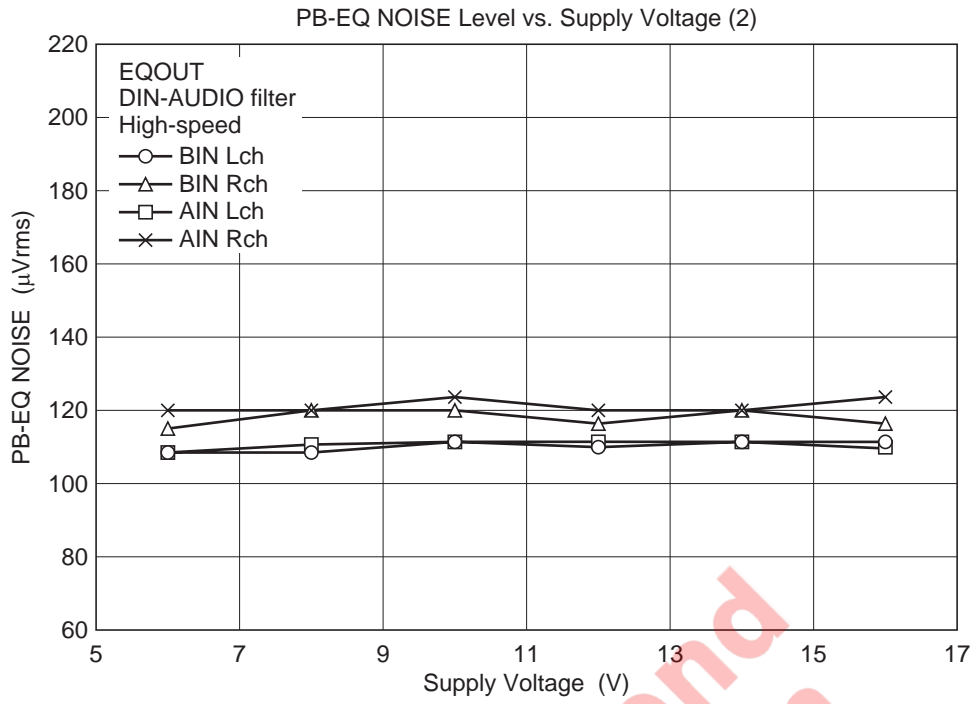


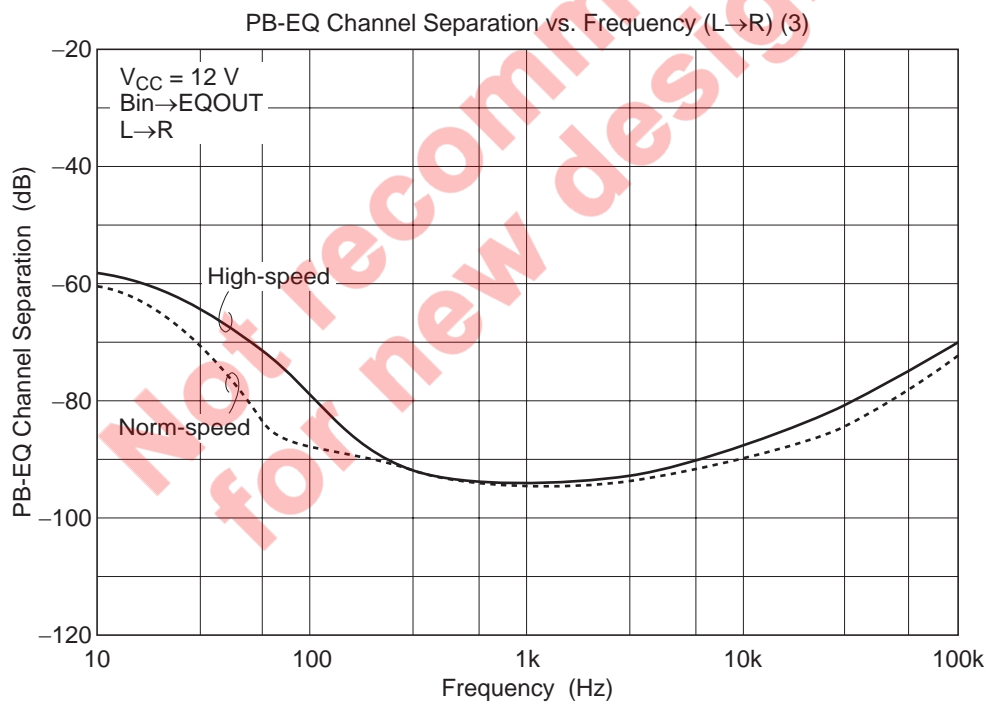
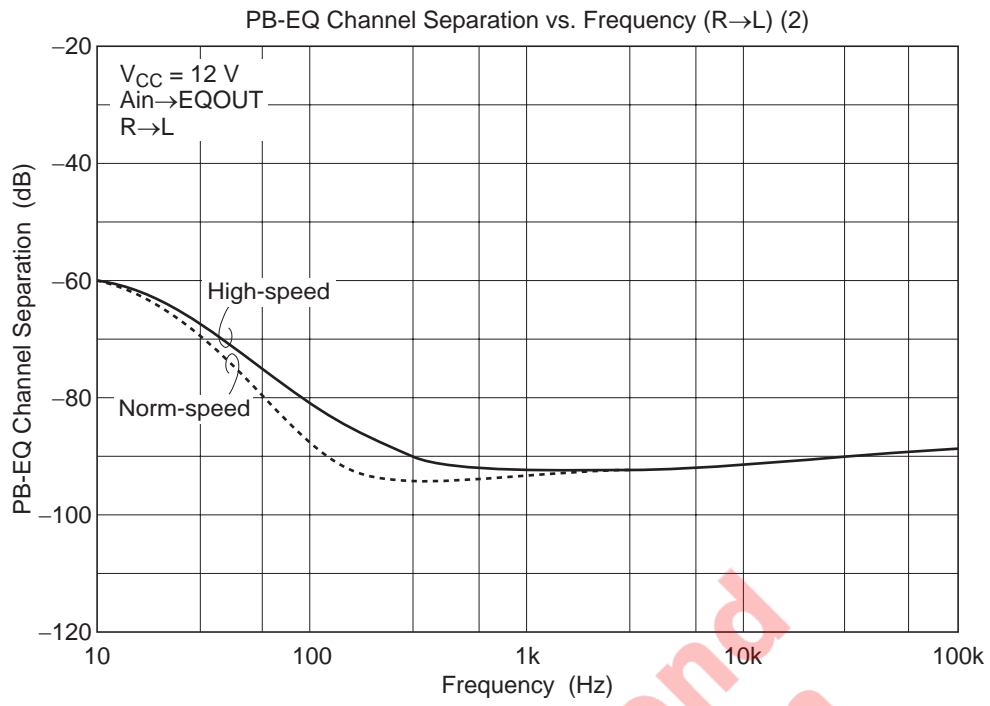


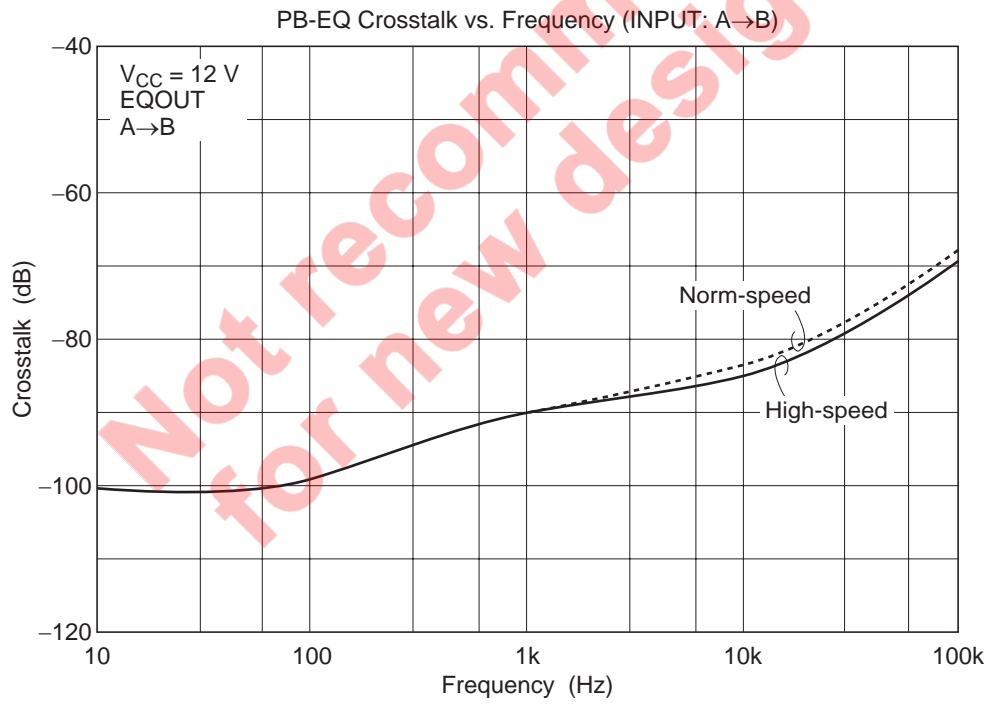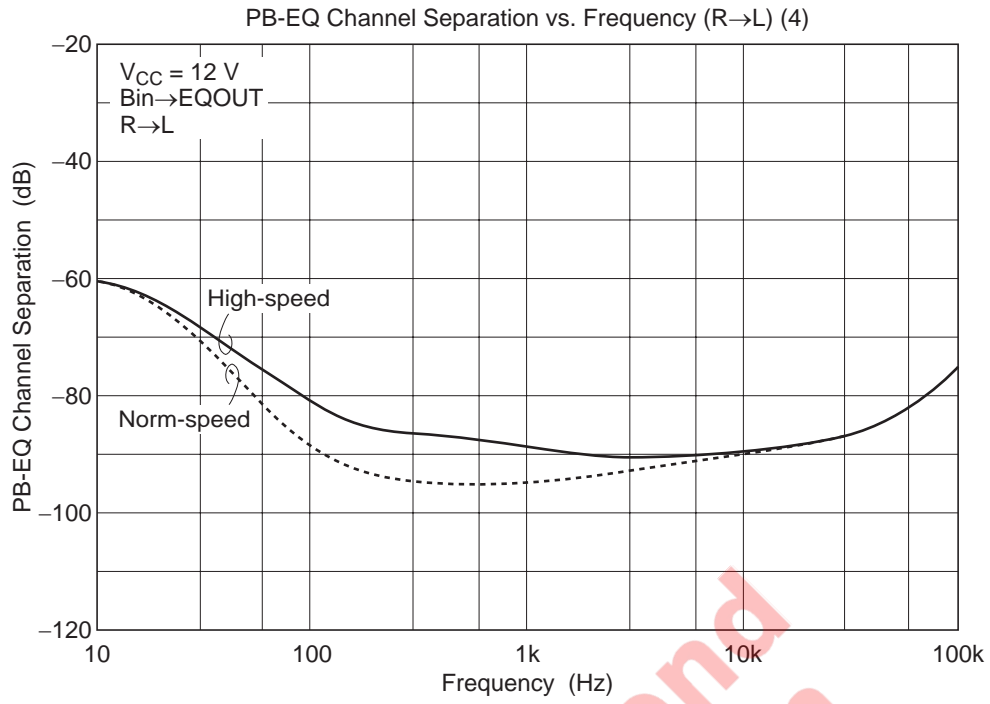

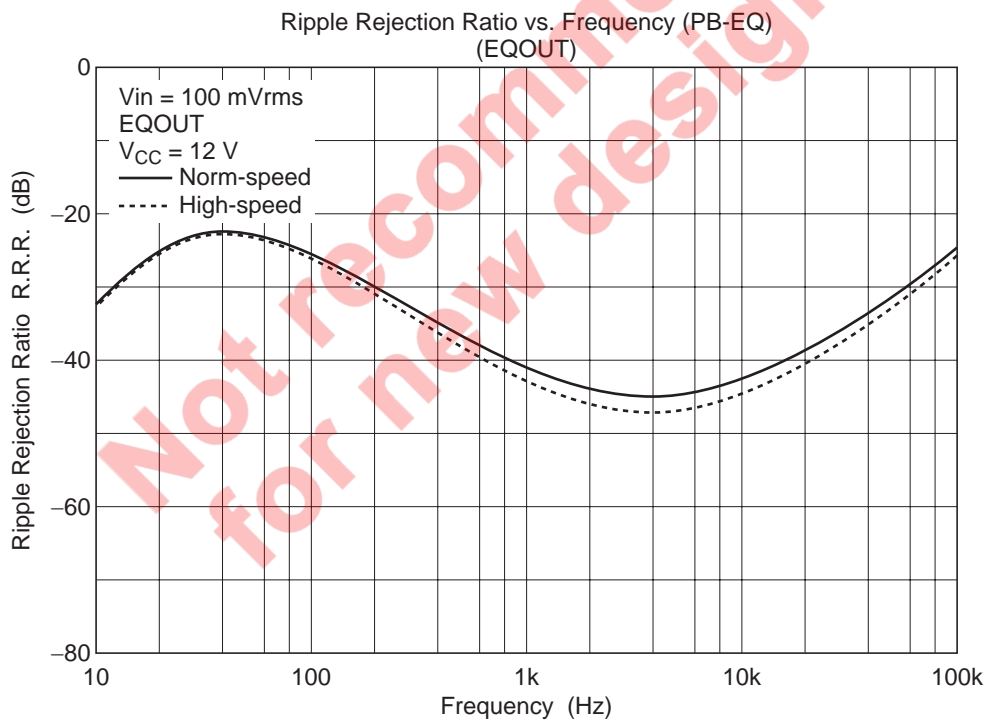
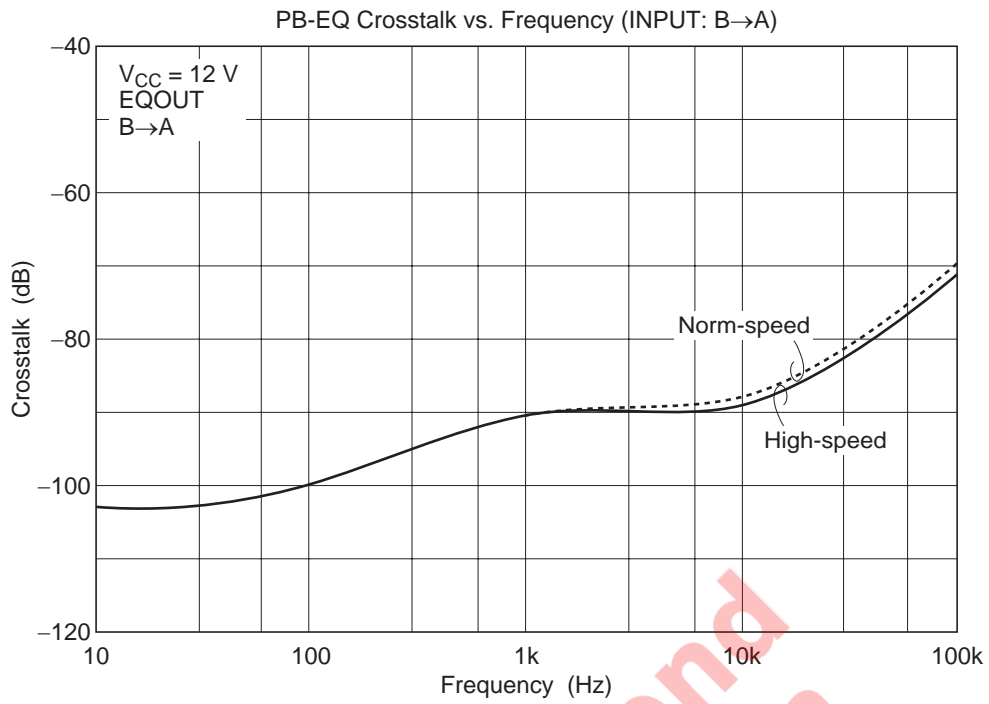


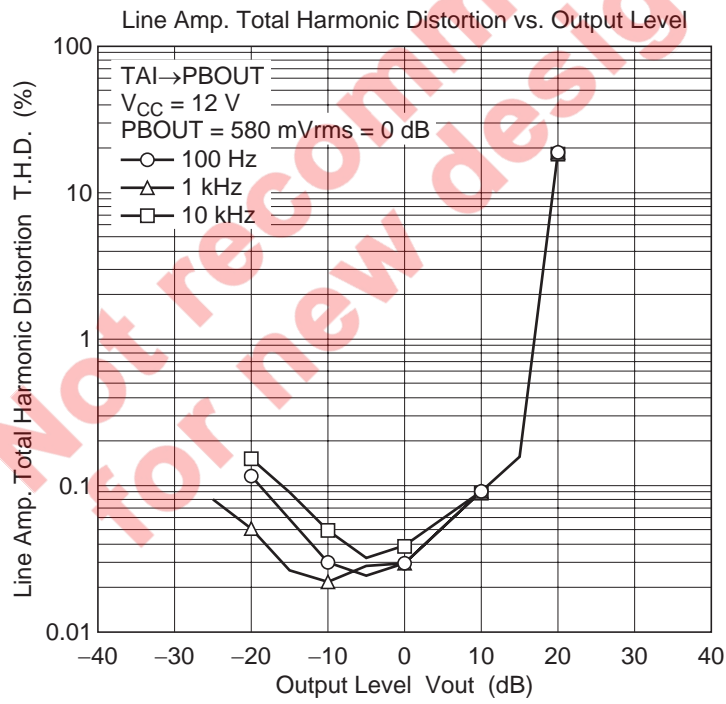
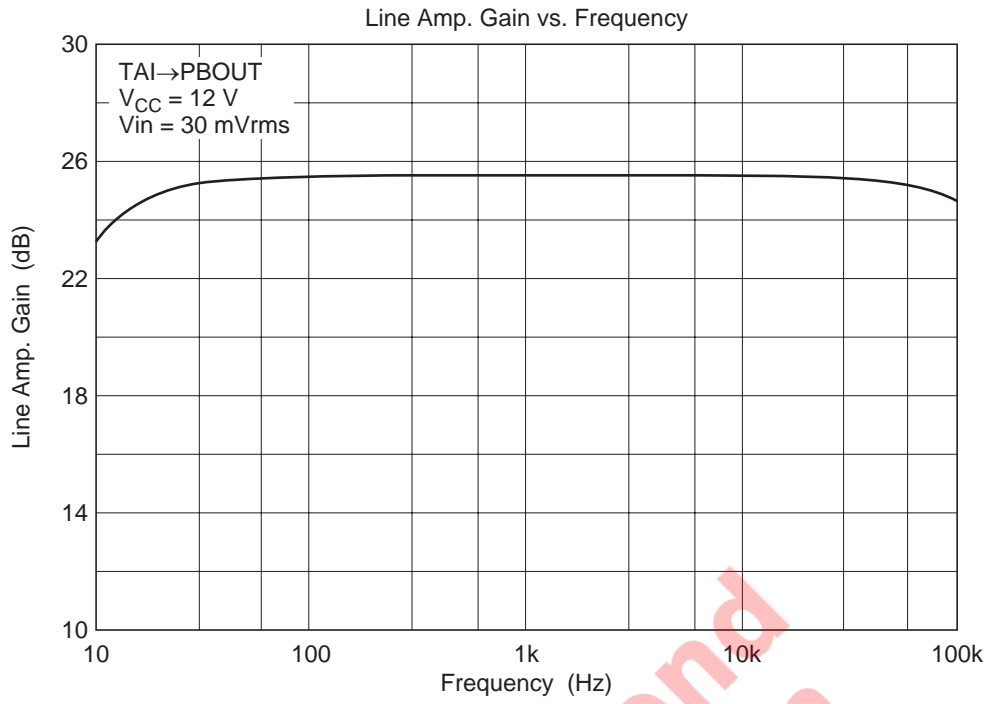


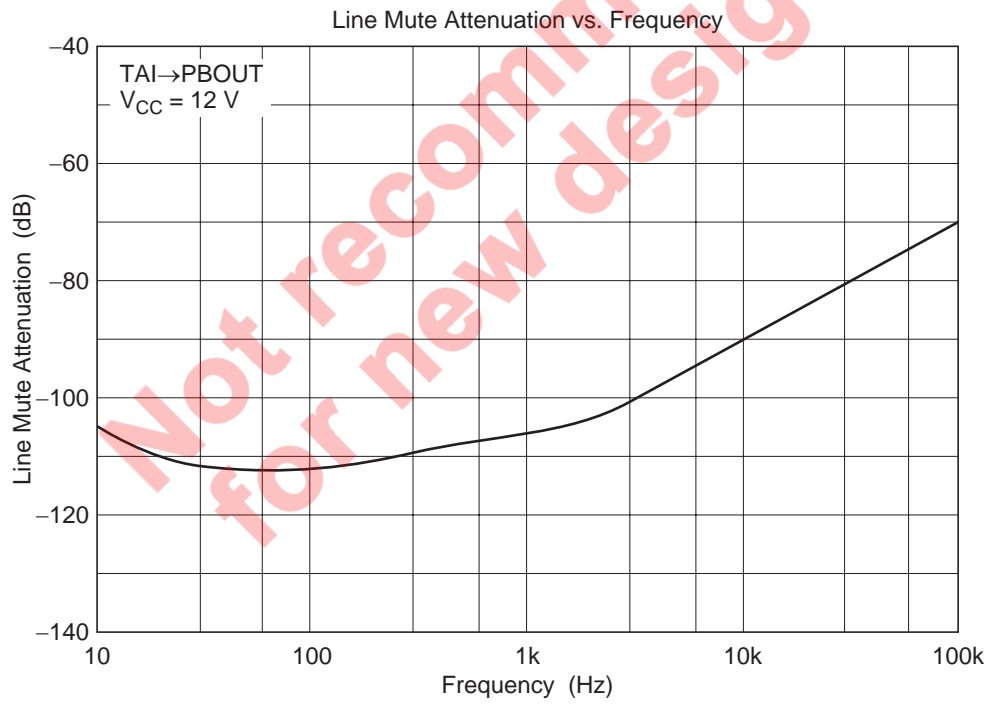
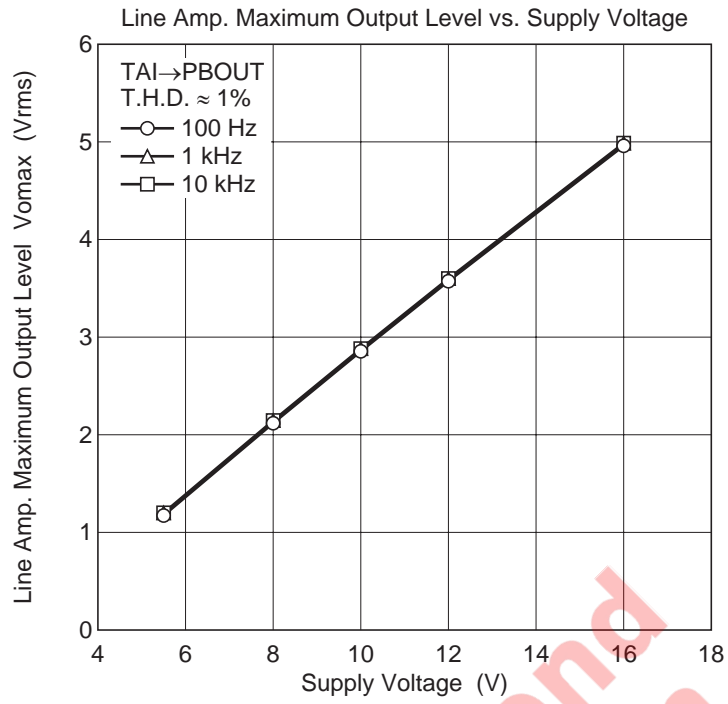


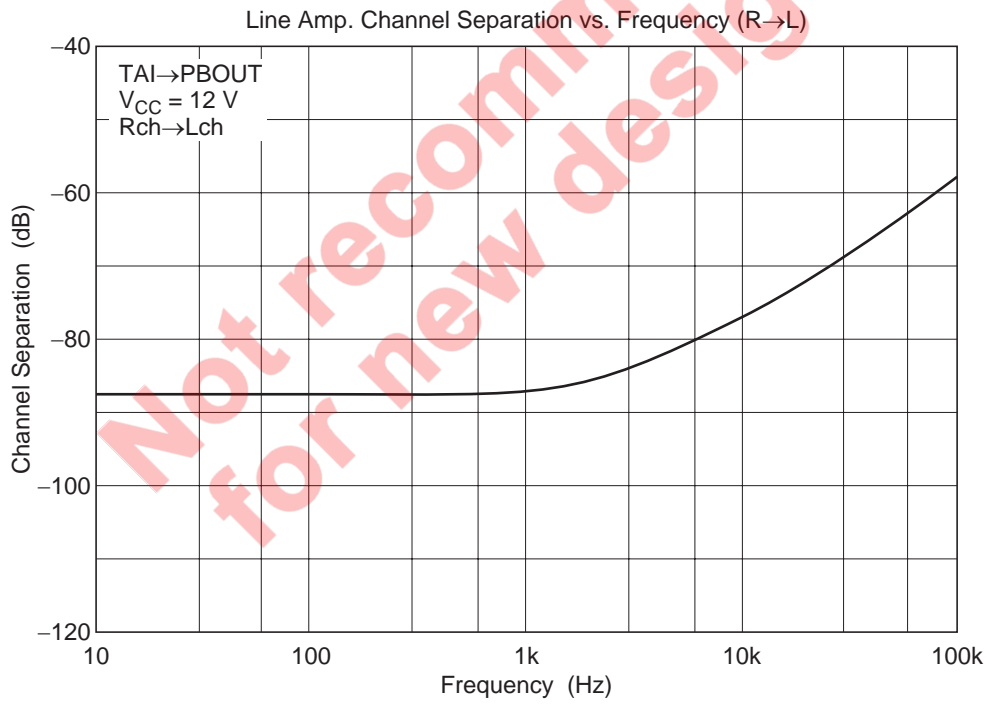
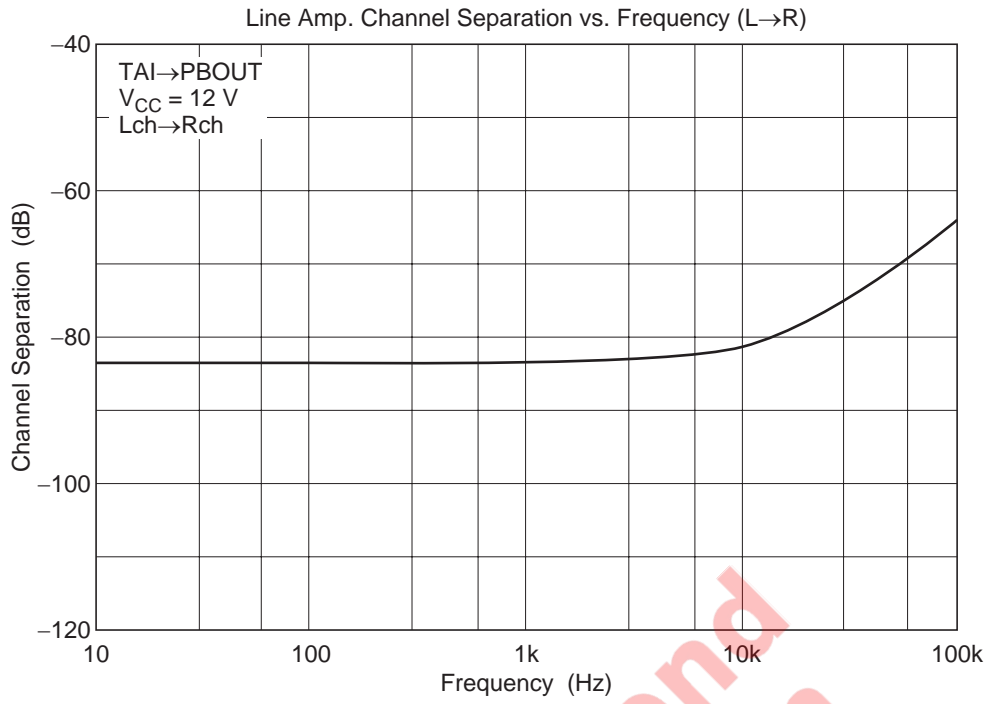




Not recommended for new design

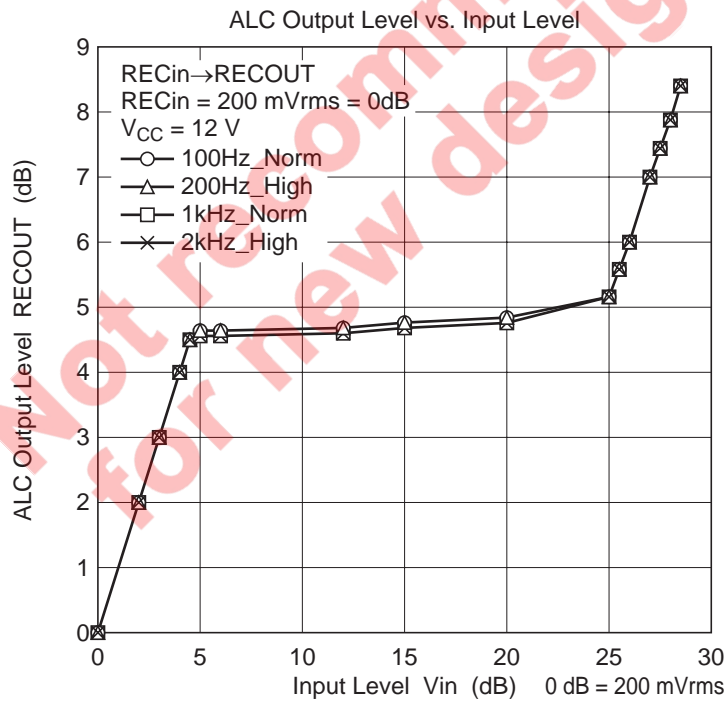
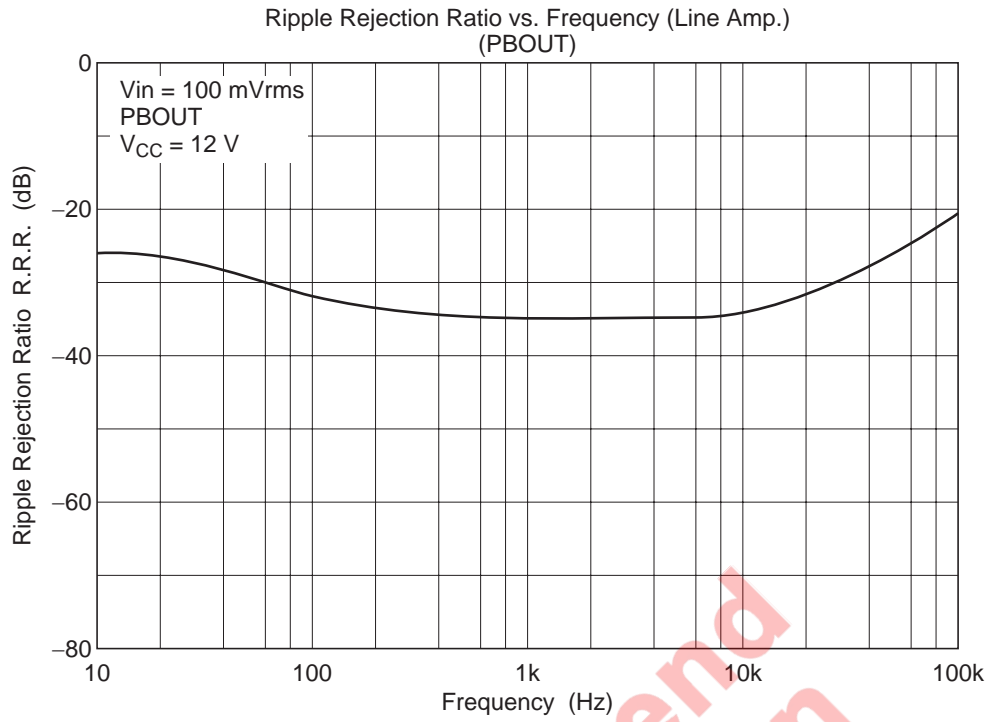


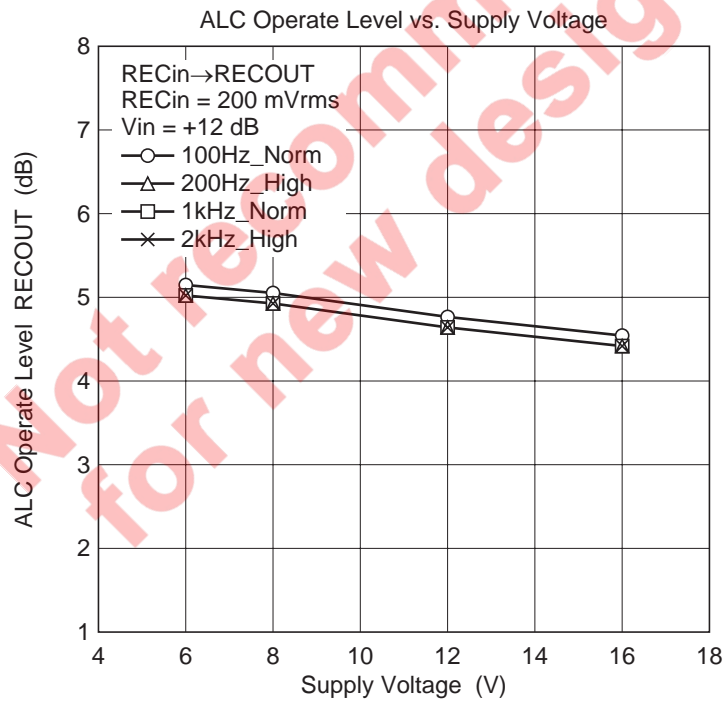
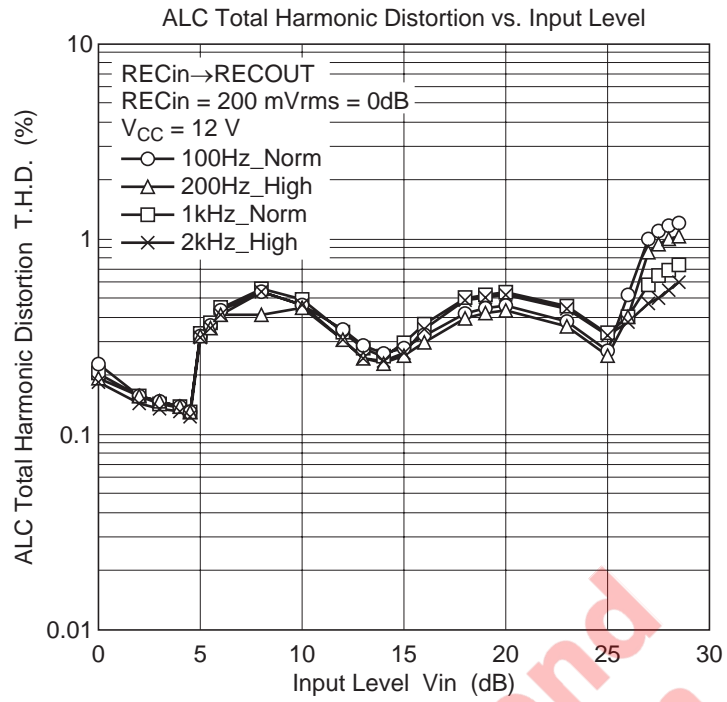


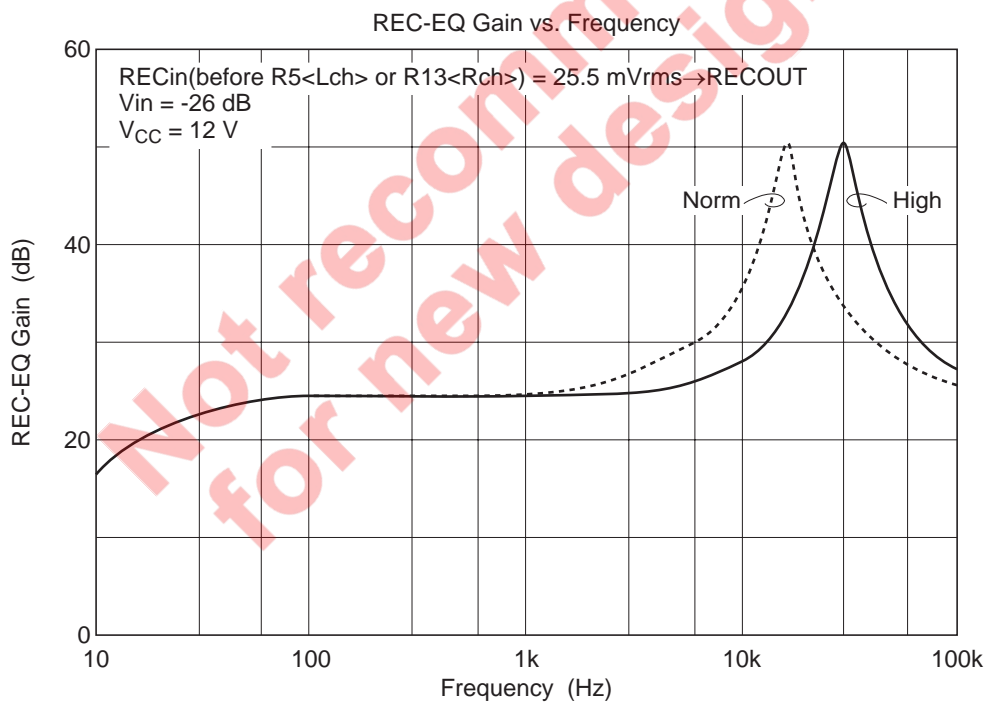
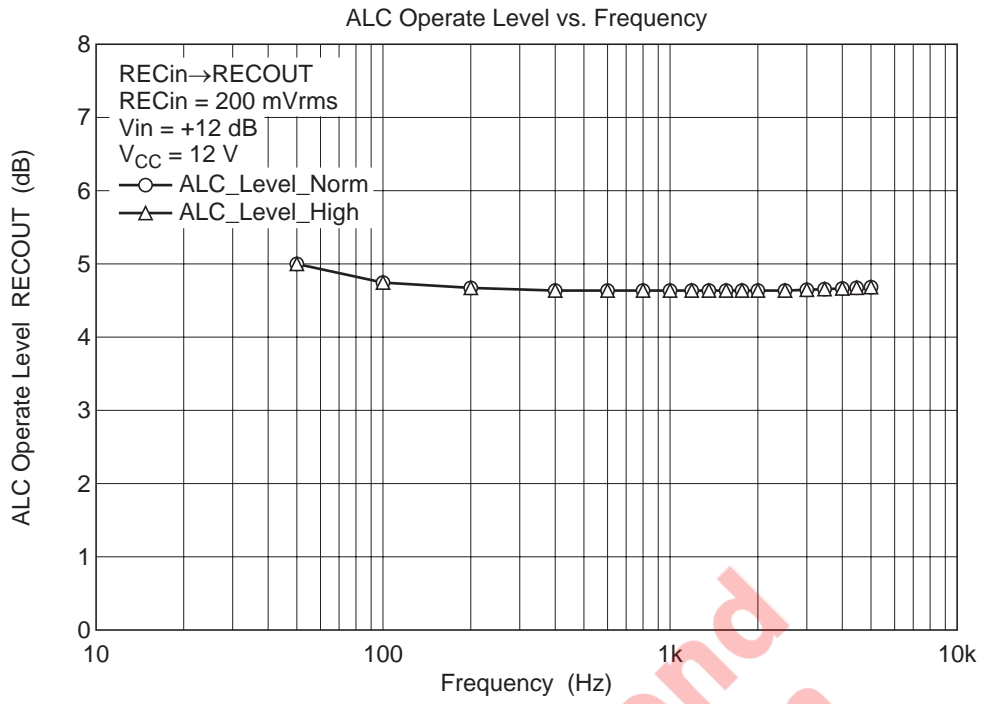


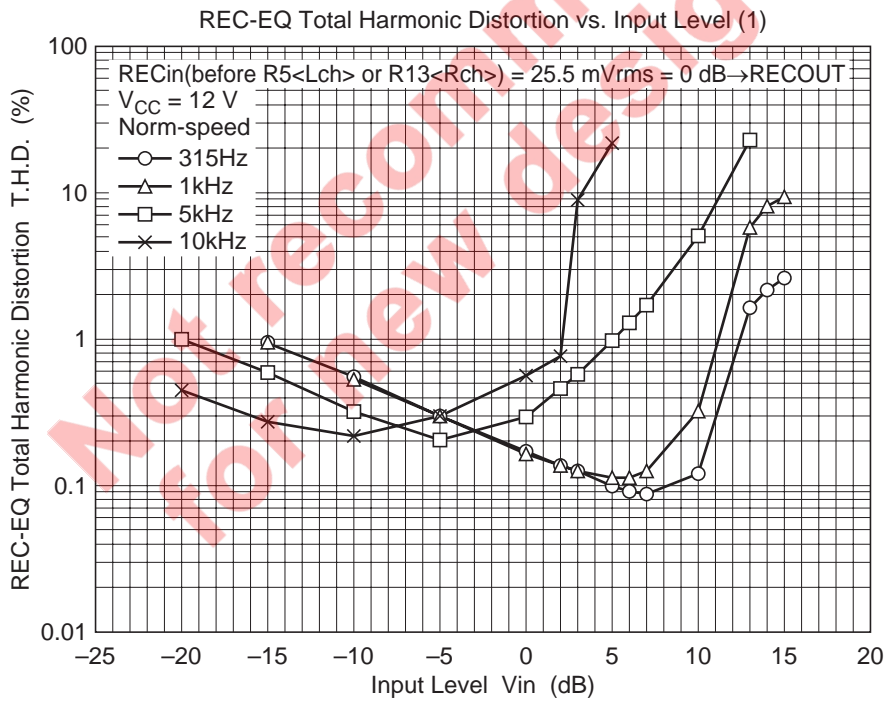
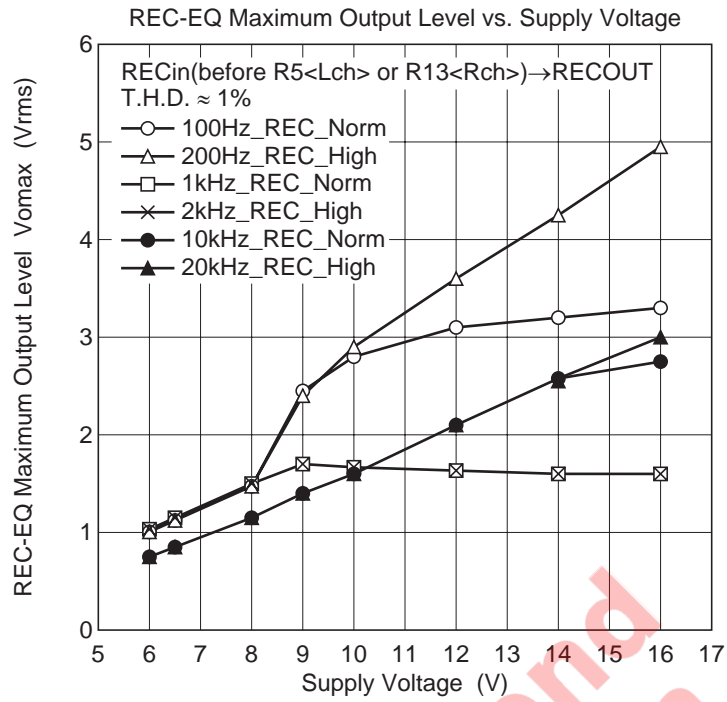


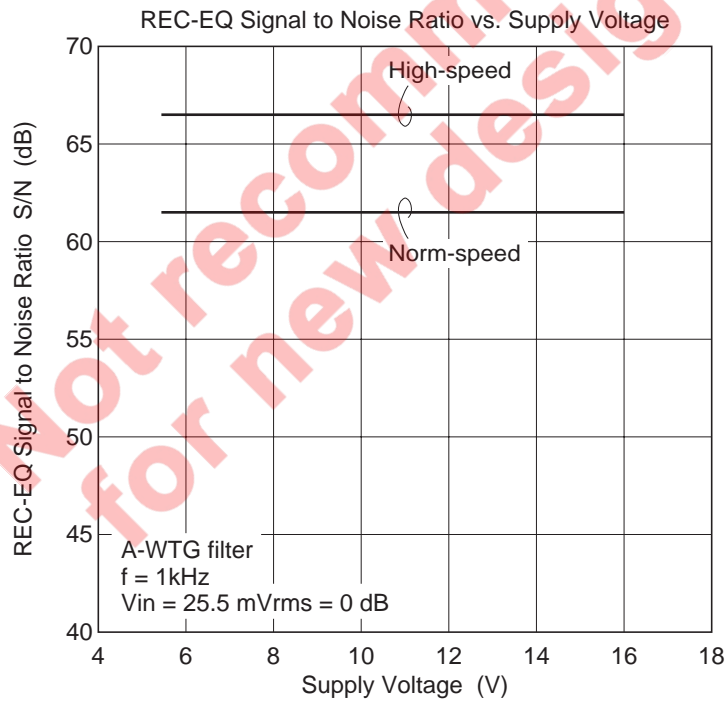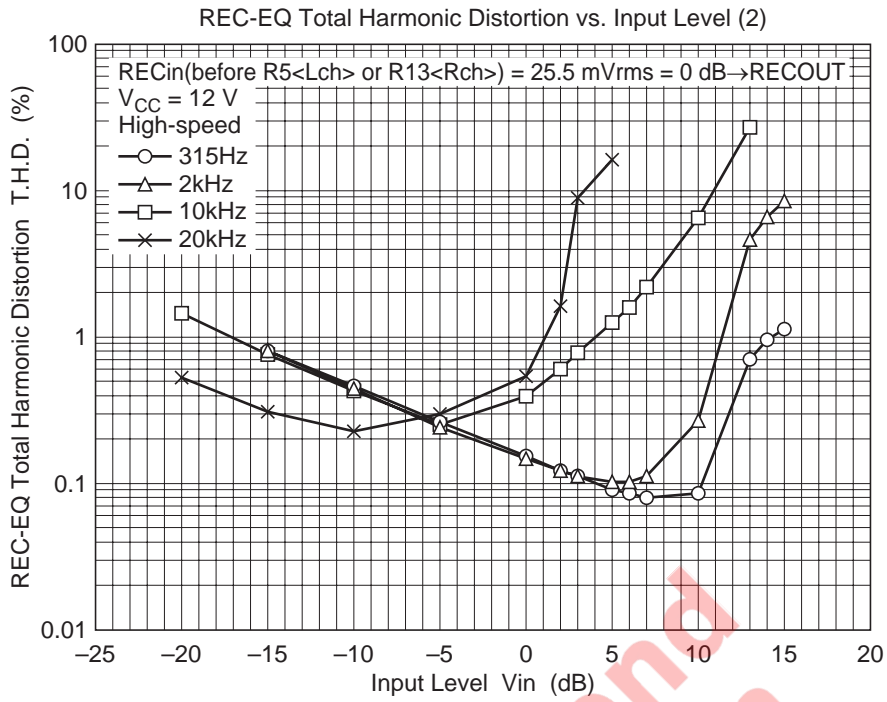

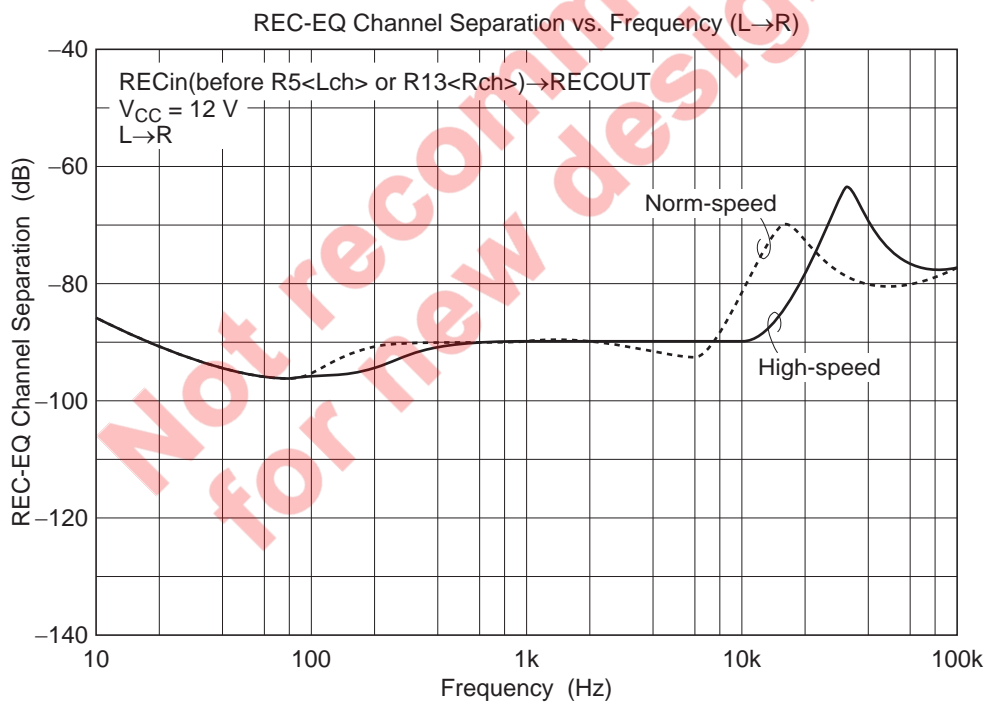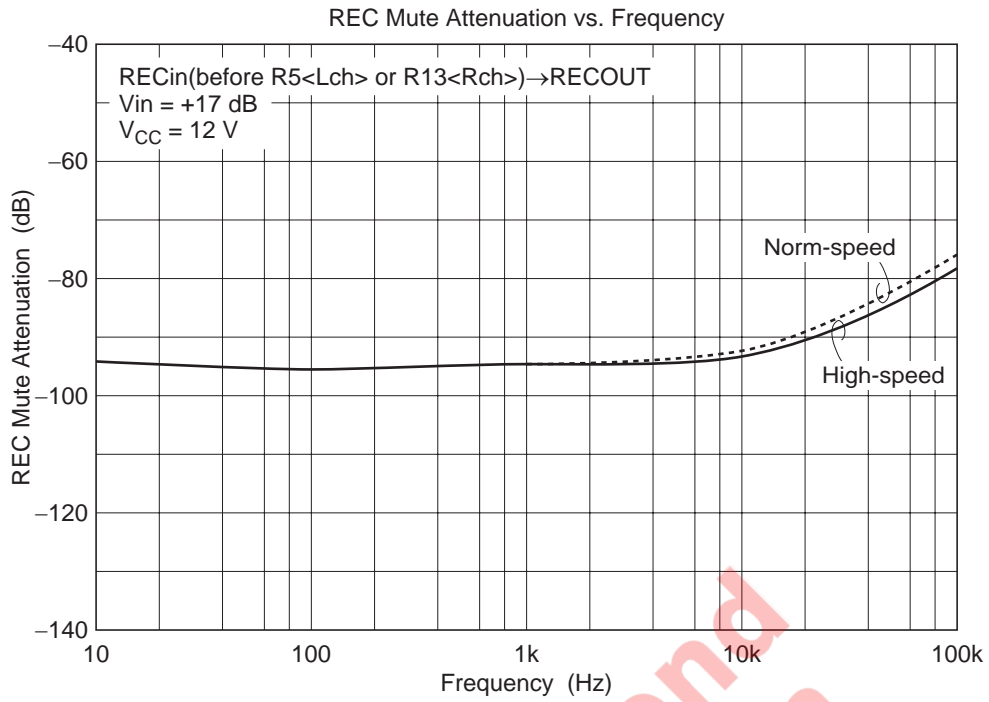

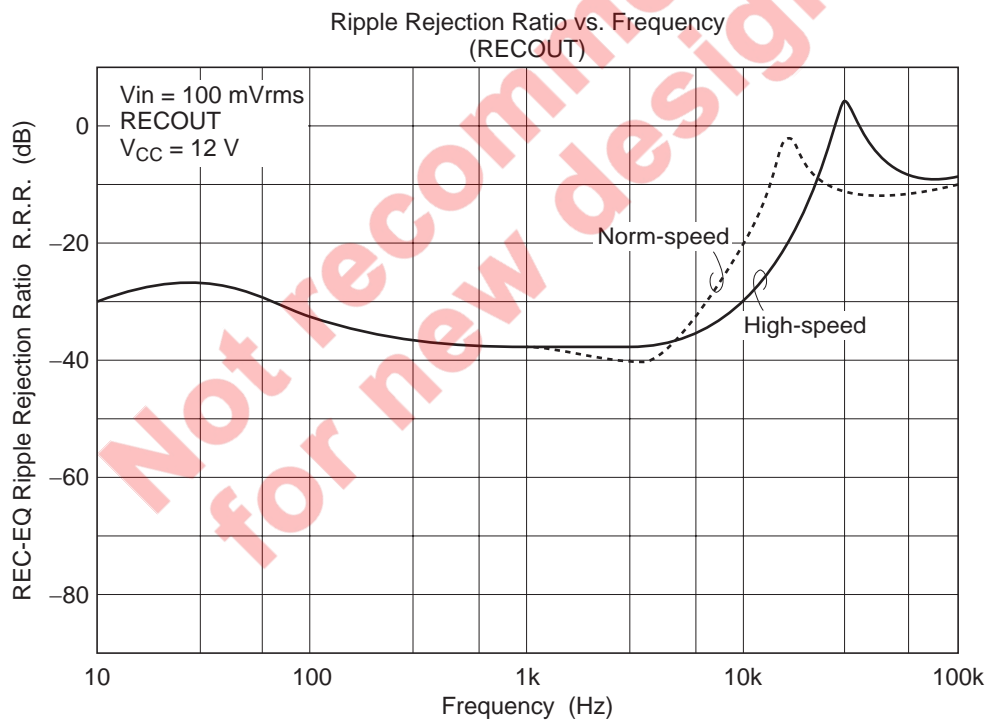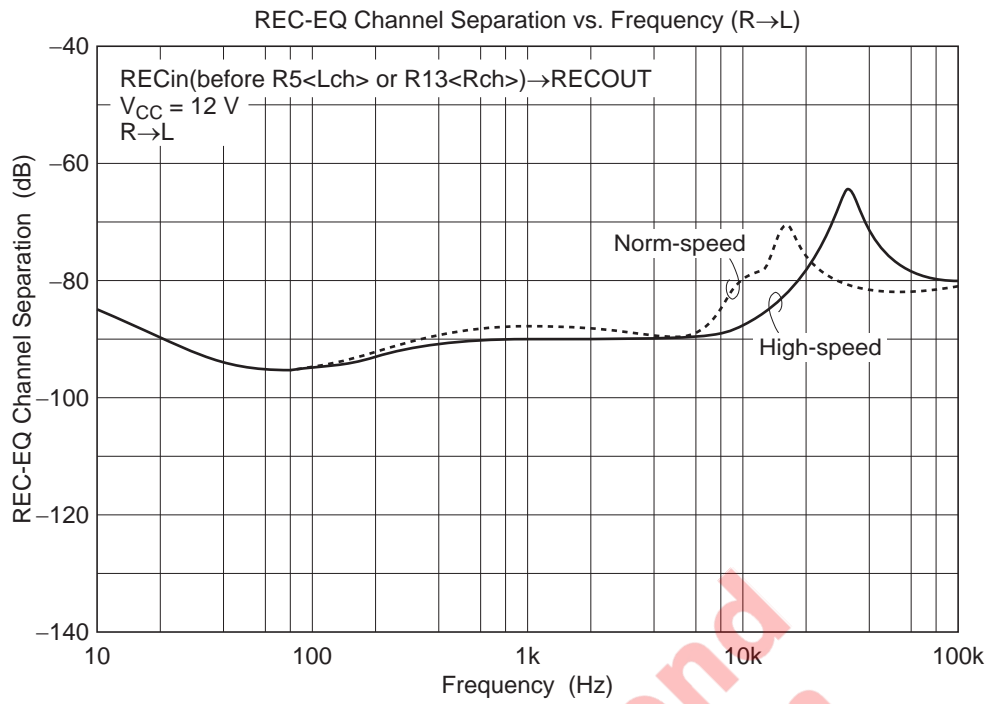


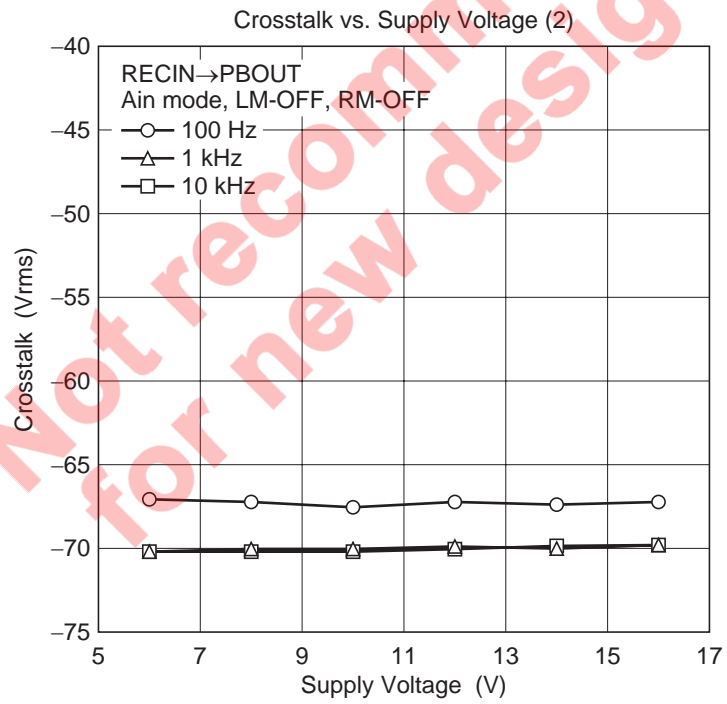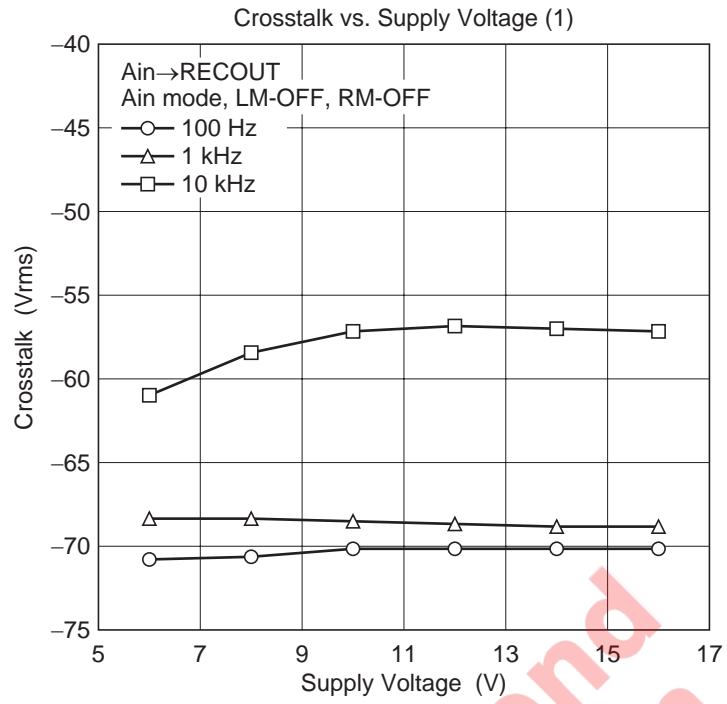

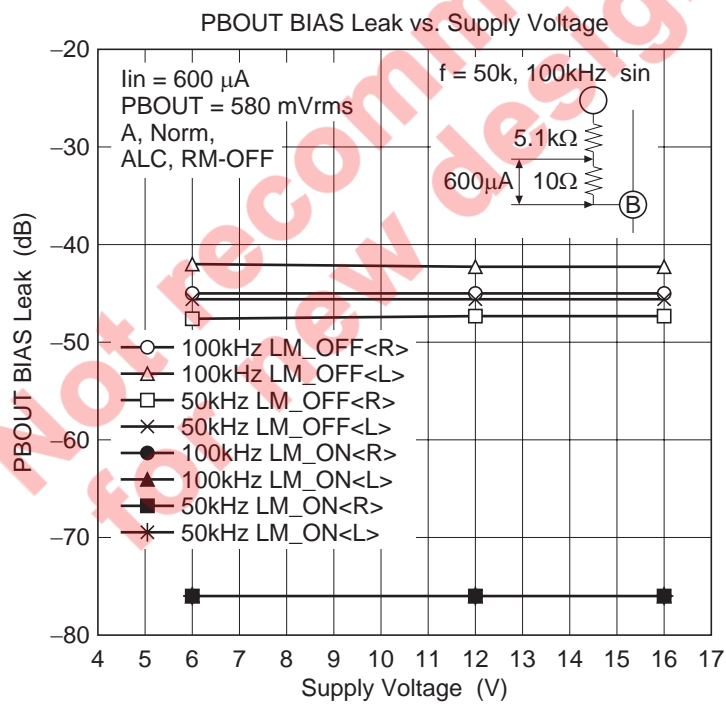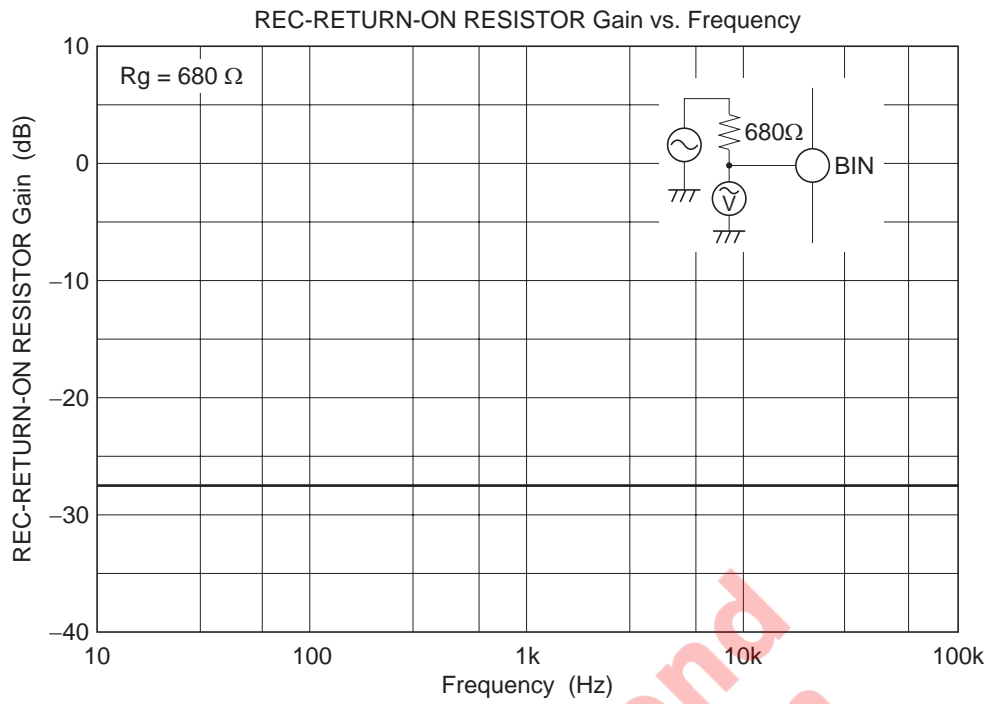


Package Dimensions


JEITA Package Code P-LQFP40-7x7-0.65	RENESAS Code PLOP0040JB-A	Previous Code FP-40B	MASS[Typ.] 0.2g
---	------------------------------	-------------------------	--------------------

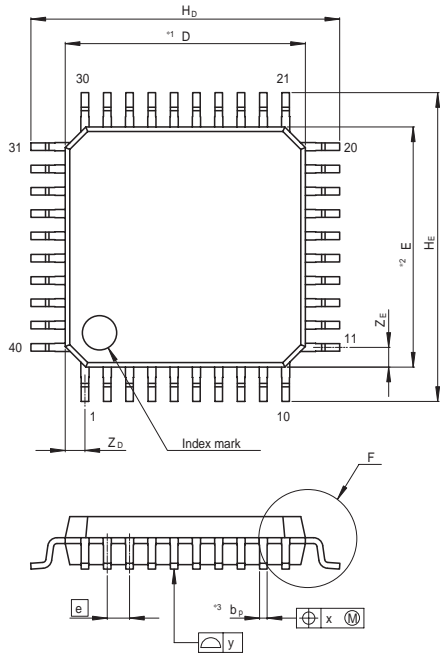

NOTE)
 1. DIMENSIONS*1*AND*2*
 DO NOT INCLUDE MOLD FLASH
 2. DIMENSION*3*DOES NOT
 INCLUDE TRIM OFFSET.



Terminal cross section



Detail F

Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
D	—	7.0	—
E	—	7.0	—
A ₂	—	1.40	—
H _D	8.8	9.0	9.2
H _E	8.8	9.0	9.2
A	—	—	1.70
A ₁	0.08	0.13	0.22
b _p	0.20	0.25	0.30
b ₁	—	0.22	—
c	0.12	0.17	0.22
c ₁	—	0.15	—
θ	0°	—	8°
e	—	0.65	—
x	—	—	0.13
y	—	—	0.10
Z _D	—	0.575	—
Z _E	—	0.575	—
L	0.40	0.50	0.60
L ₁	—	1.0	—

Not recommended for new designs

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
 2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
 3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
 4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
 5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
 6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
 7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
 8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.
-

RENESAS SALES OFFICES



<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology Hong Kong Ltd.
7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd.
10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology (Shanghai) Co., Ltd.
Unit2607 Ruijing Building, No.205 Maoming Road (S), Shanghai 200020, China
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

Renesas Technology Singapore Pte. Ltd.
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001