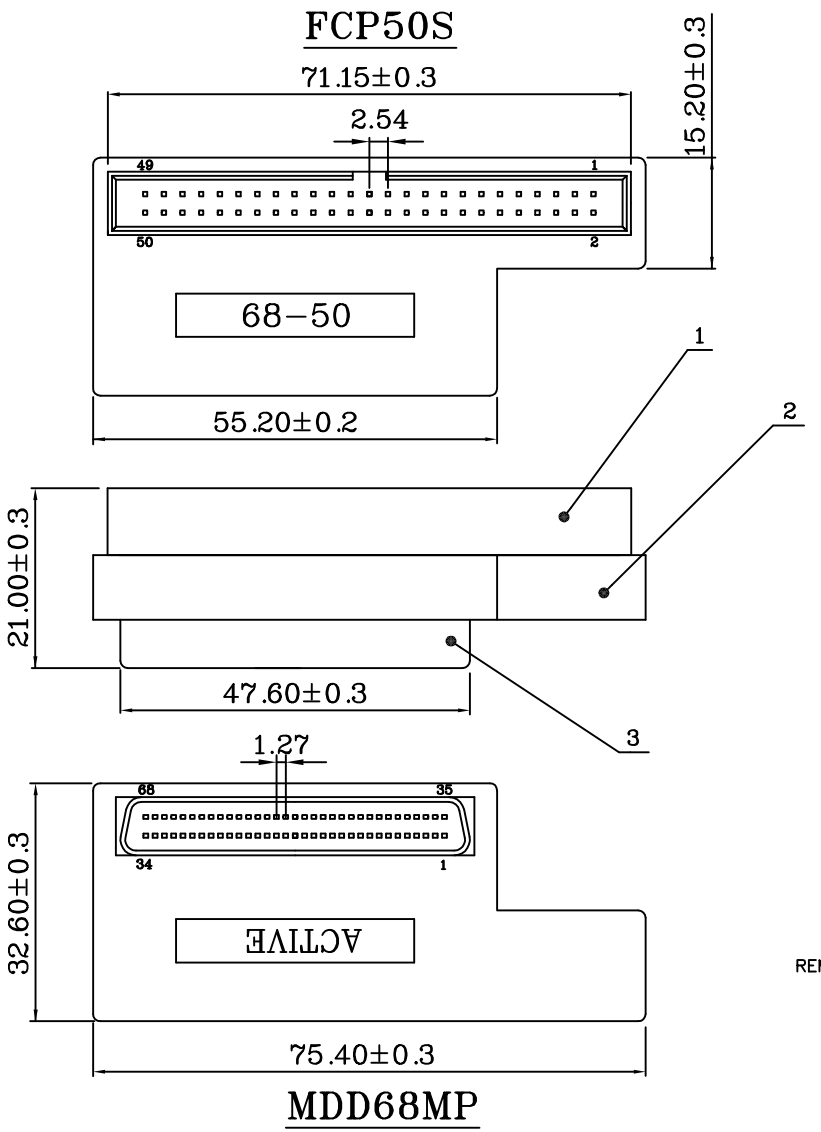

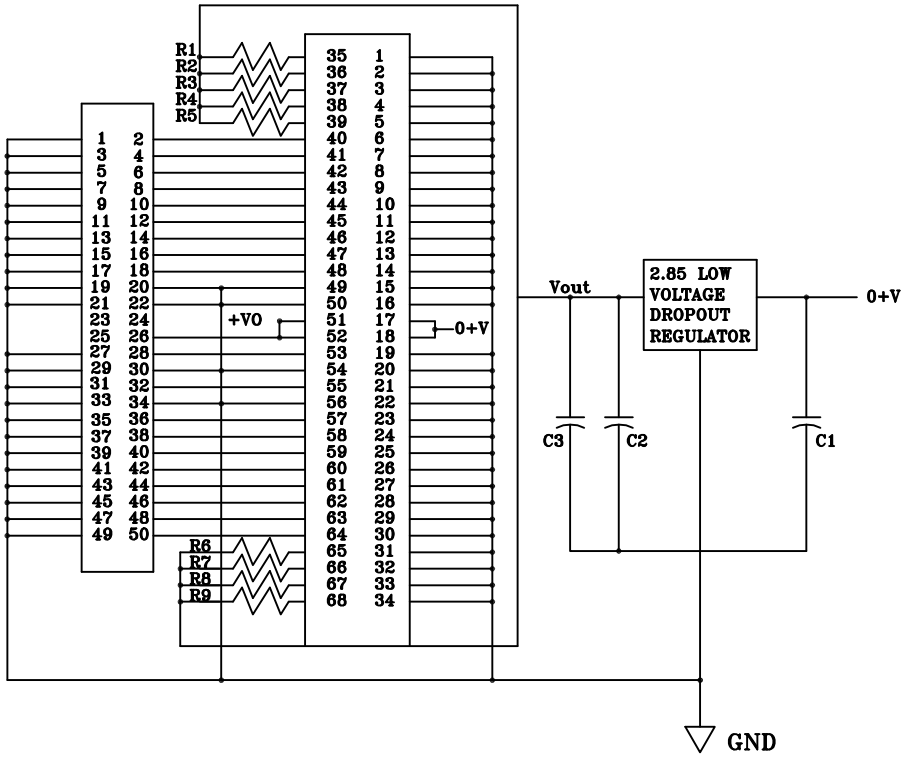

REMARK:

1. IDC50PIN FEMALE
2. ASSEMBLY HOOD
3. HPD68PIN FEMALE PLASTIC

R1 - R9=110Ω ±2%
C1=4.7uF/16V ±20% TAN.CAP
C2=22uF/16V ±20% TAN.CAP
C3=0.1uF/50V +80% −20% CER.CAP
REG Output=2.85V ± 1%

∘ 100% TEST

A S68A14-R UPPER BYTE ACTIVE TERMINATOR	HPD68PIN FEMALE TO IDC50PIN FEMALE ACTIVE RIGHT ANGLE	12/23/99	
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5'
0. ±0.5
.0 ±0.3
.00 ±0.2

Assmann Electronic GmbH

SCALE: 1:1 UNIT: mm
DRAWN MICHAEL 12/23/99
CHECKED / /
APPROVED / /
SIZE A4 REV. A

DRAWN NAME: S68A14-R
PRODUCT NO. AB 845 TERM
FILE NAME: S68A14-R