

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0431600305](#)
Status: **Active**
Overview: [Sabre Power Connector](#)
Description: Sabre Vertical Header, 5 Circuits, Glow-Wire Capable, PCB Thickness 2.40mm, without Board Lock

Documents:

| | |
|----------------------------------------------------------------|----------------------------------------------------------------|
| Drawing (PDF) | Test Summary 444410000-TS-000 (PDF) |
| 3D Model | Datasheet (PDF) |
| 3D Model (PDF) | Symbol Footprint Data SYM-43160-0105-001 (PDF) |
| Product Specification PS-44441-9999-001 (PDF) | RoHS Certificate of Compliance (PDF) |
| Packaging Specification PK-43789-001-001 (PDF) | |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |


General

| | |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Family | PCB Headers |
| Series | 43160 |
| Application | Power, Wire-to-Board |
| Comments | Fully Polarized, high power wire-to-board and wire-to-wire connector system; This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. |

| | |
|----------------|---------------------------------------|
| Component Type | PCB Header |
| Overview | Sabre Power Connector |
| Product Name | Sabre |
| Taxonomy | PCB Headers and Receptacles |
| UPC | 800753844087 |

Physical

| | |
|--------------------------------|-------|
| Breakaway | No |
| Circuits (Loaded) | 5 |
| Circuits (maximum) | 5 |
| Color - Resin | Black |
| Durability (mating cycles max) | 25 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Capable | Yes |
| Guide to Mating Part | No |
| Keying to Mating Part | Yes |

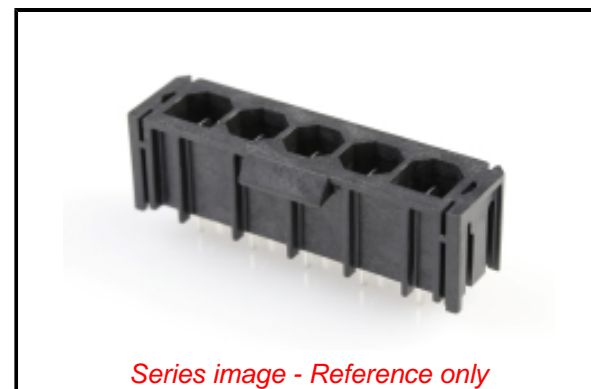

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[43160 Series](#)

Mates With

[444412005 Sabre Receptacle Housing](#)

| | |
|--------------------------------|--------------------------------|
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 5.818/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| PC Tail Length | 5.33mm |
| PCB Locator | Yes |
| PCB Retention | N/A |
| PCB Thickness - Recommended | 2.40mm |
| Packaging Type | Bag |
| Pitch - Mating Interface | 7.50mm |
| Pitch - Termination Interface | 7.50mm |
| Plating min - Mating | 0.889µm |
| Plating min - Termination | 0.889µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Fully |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -40° to +75°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|-------|
| Current - Maximum per Contact | 18.0A |
| Voltage - Maximum | 600V |

Solder Process Data

| | |
|------------------------------------------------|------|
| Duration at Max. Process Temperature (seconds) | 005 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 235 |

Material Info

Reference - Drawing Numbers

| | |
|-------------------------|--------------------|
| Packaging Specification | PK-43789-001-001 |
| Product Specification | PS-44441-9999-001 |
| Sales Drawing | 431600001-SD-000 |
| Symbol/Footprint Data | SYM-43160-0105-001 |
| Test Summary | 444410000-TS-000 |

This document was generated on 01/05/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION