

REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE & CANCEL	1/3/03
	BXA-12553/KIT & BXA-12553/INV	

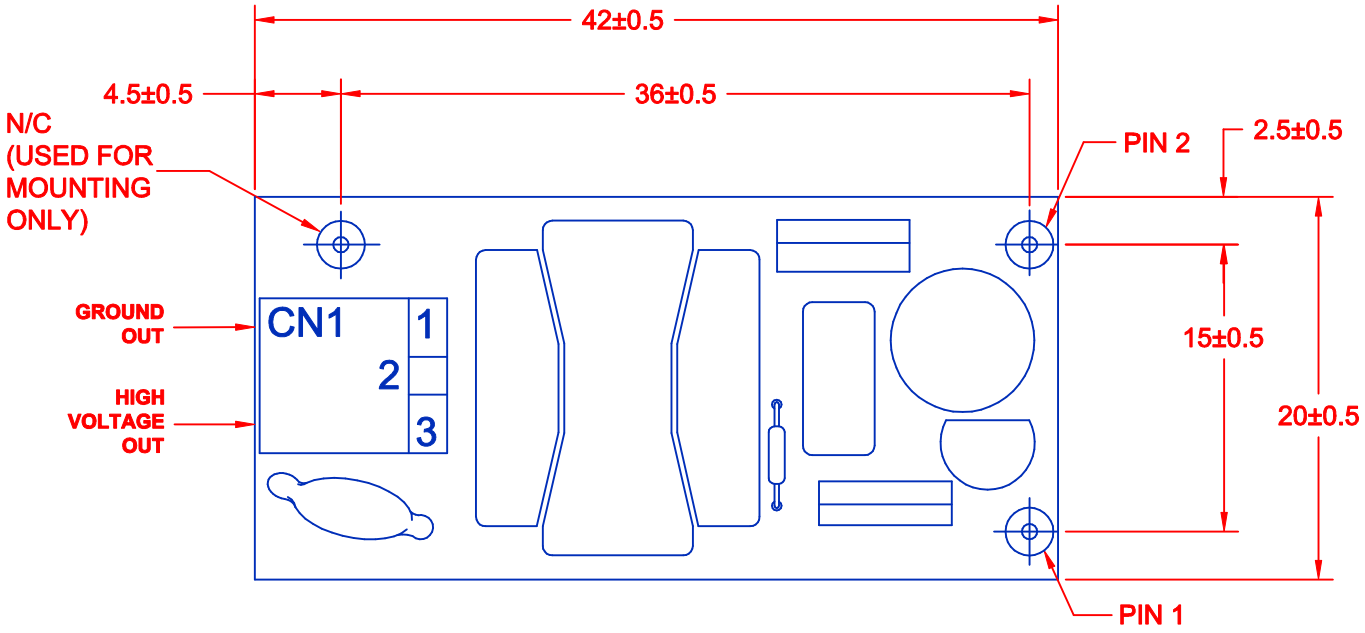

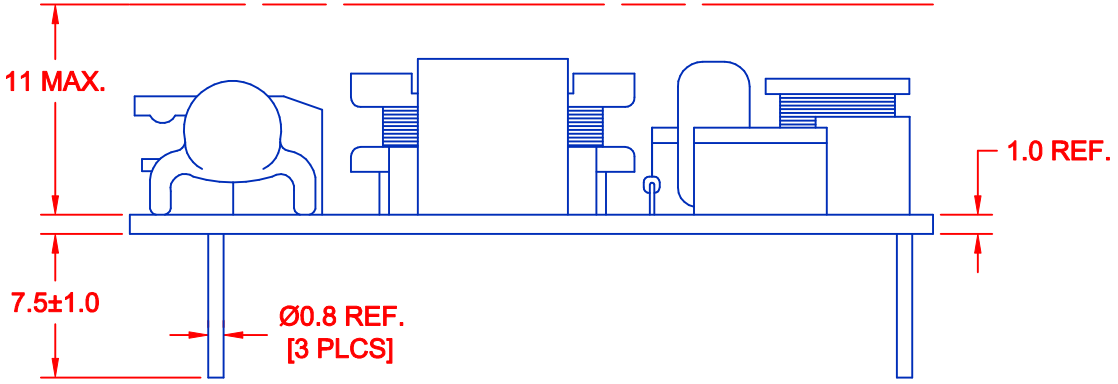

NOTE:
MATING CONNECTOR IS NOT INCLUDED WITH INVERTER.
JKL WIRE HARNESS PART NO. BXC-10566 CAN BE ORDERED SEPARATELY.

CN1 PIN #	TO LAMP
1	OUT GROUND
2	N/C
3	HIGH V

BOARD PIN #	INPUT
1	+V (V in)
2	V (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	----	180	250
OUTPUT VOLTAGE: (Vrms)	600	700	800
OUTPUT CURRENT (maRms)	4.0	5.5	7.0
OUTPUT FREQUENCY: (kHz)	10	25	40
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.3
2 PL +/-
ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE
CCFL POWER SUPPLY

DRAWN BY	APP'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	F.D.	1/3/03	A	55335	BXA-12553

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	1/3/03			OF