1	2	3	4	5	6


A

B

C

D


FEMALE END VIEW



	1. VT
	2. RD
	3. GY
	4. RD/BU
	5. GN
13.YE/BN	6. BU
14.BN/GN	7. GY/PK
15.WH	8. WH/GN
16.YE	9. WH/YE
17.PK	10.WH/GY
18.GY/BN	11.BK
19.BN	12.GN/YE

HARTING P/N	Type of cable	Cable length(mm)
21373600D75050	PVC	5000^{+200}_{-0}
21373600D75100	PVC	10000^{+400}_{-0}

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

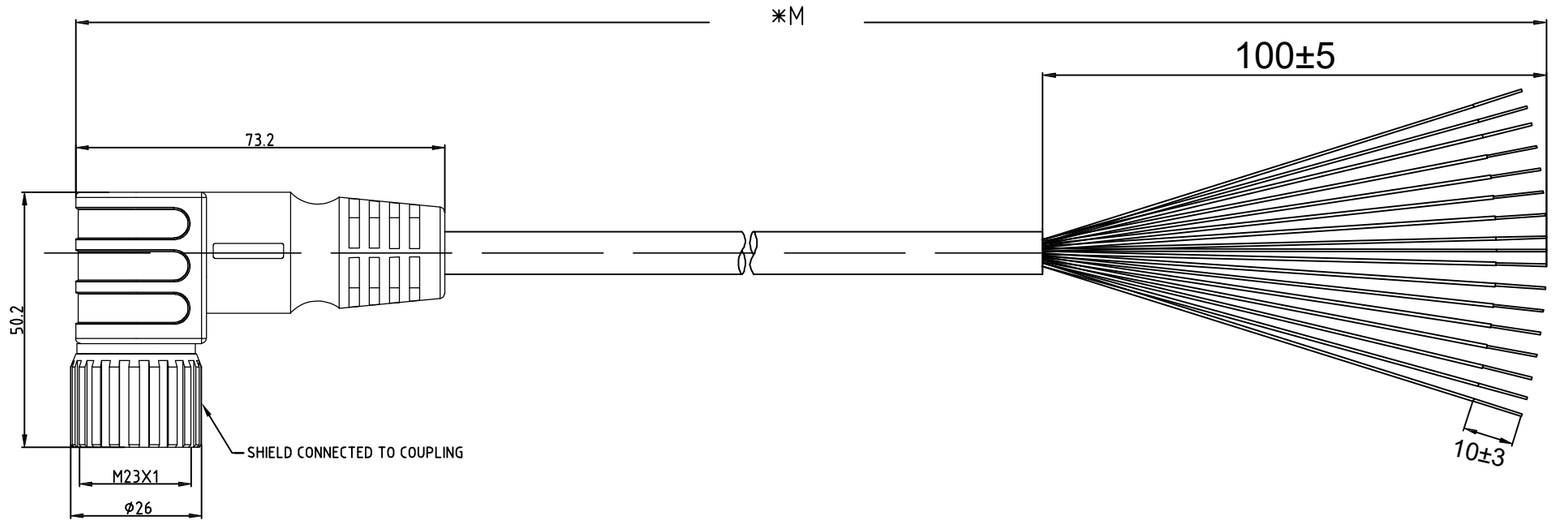

A	First issue.	Ivy Lin	11/02/22
Rev.	Description	Appr.	Date

All Dimensions in mm | Tech. Character. | Free size tol. | According to production drawing

All rights reserved

Department HCS - CN

HARTING Customised Solutions

D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
LINI	LIANL	LIANL	2021-11-02	Final release

Title: M23_19P FE,Int-thread,ANG PVC cable,xxM

Doc-Key / ECM-Nr.: /

Type: TB | Number: 2137 36 00 D 75 XXX | Rev.: A | Page: 1/1

A4