



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products




152-275 MHz Bandpass filter

Part Number: AE213B10681

Passband (pb):	152-275 MHz
Insertion loss in pb:	< 3dB
Return loss in pb:	> 15 dB
Rejection:	> 40 dB @ 135 MHz & 304 MHz
Dimensions:	4" x 0.6" x 0.6"
In/Out Connectors:	SMA(F)

Outline Drawing:

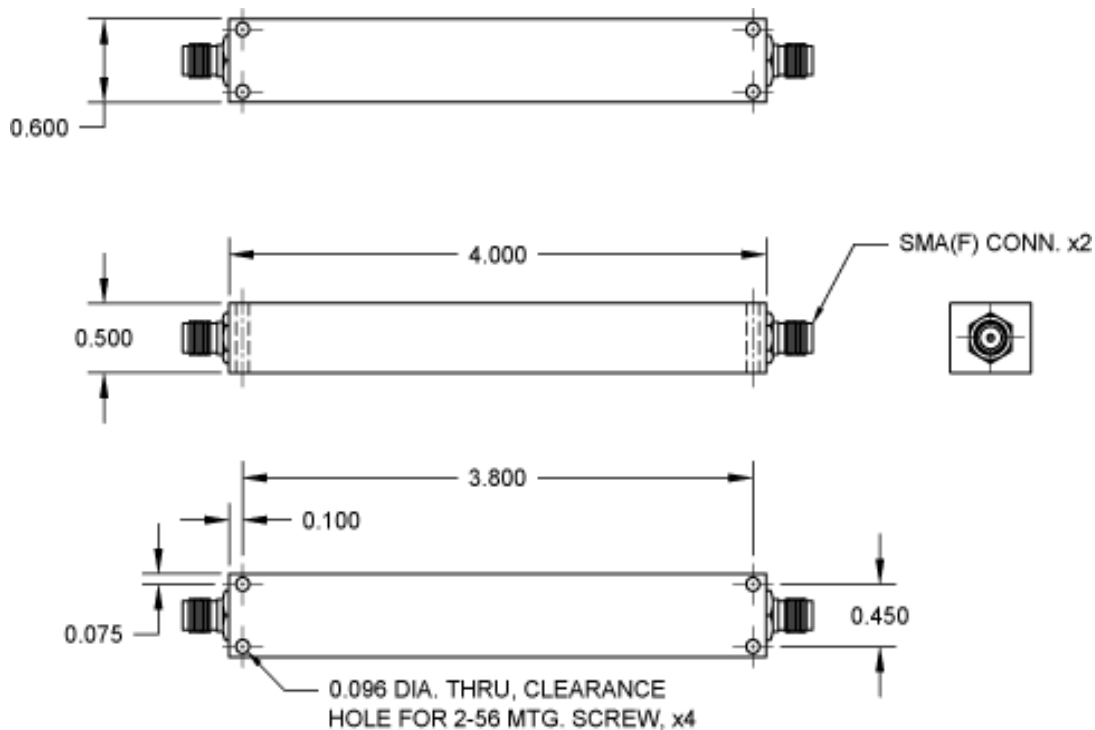




152-275 MHz Bandpass filter

Part Number: AE213B10681

Response Plot:

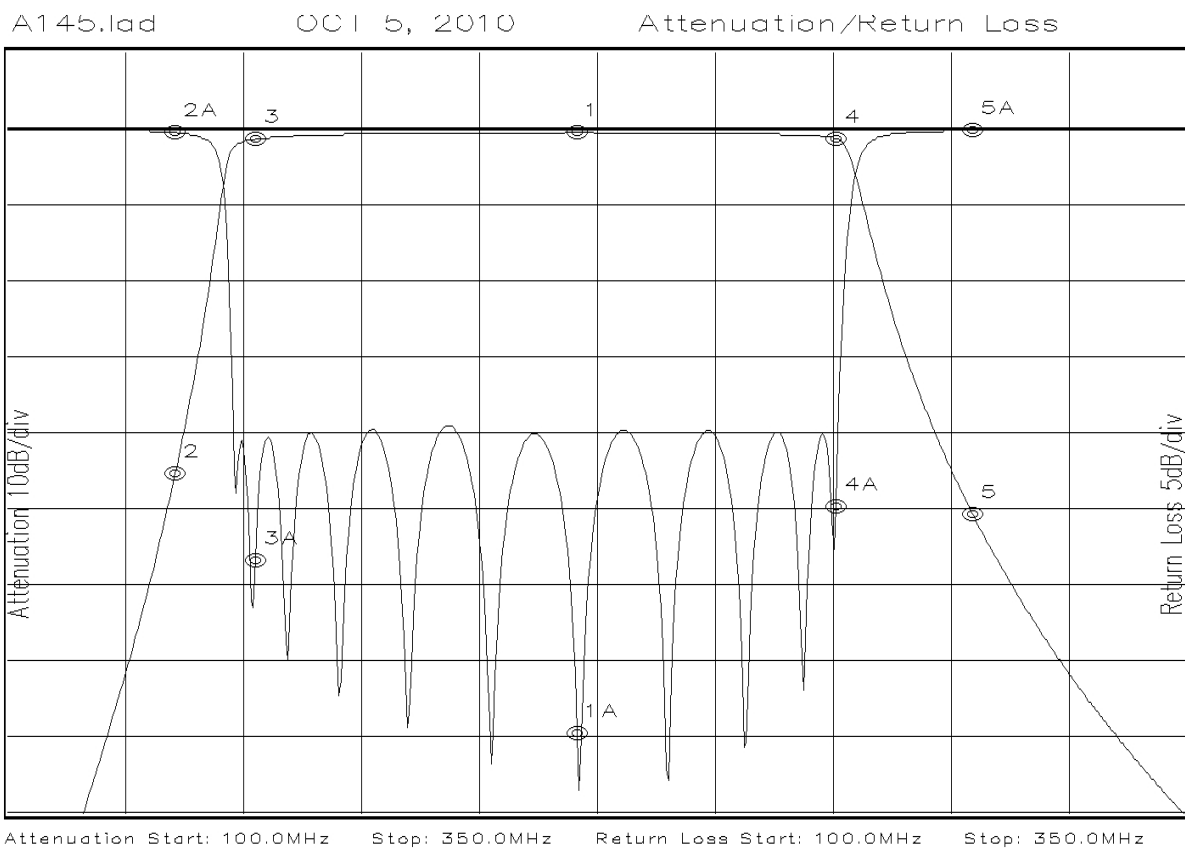

Marker 1 Freq 220.35MHz Atten -0.533dB
 Marker 2 Freq 135.13MHz Atten -45.740dB
 Marker 3 Freq 152.10MHz Atten -1.377dB
 Marker 4 Freq 275.28MHz Atten -1.292dB
 Marker 5 Freq 304.36MHz Atten -51.099dB

Marker 1A Freq 220.35MHz Ret Loss -40.003dB
 Marker 2A Freq 135.13MHz Ret Loss -0.269dB
 Marker 3A Freq 152.10MHz Ret Loss -28.567dB
 Marker 4A Freq 275.28MHz Ret Loss -24.988dB
 Marker 5A Freq 304.36MHz Ret Loss -0.125dB