



# 5795-5815 MHz Cavity Band Pass Filter



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

**Part Number: AB5805B746**

## Electrical Specifications

**Center Frequency (Fo):** 5805 MHz  
**Passband (PB):** 5795-5815 MHz  
**Insertion Loss:** 2.5 dB Max. @ Fo  
**Insertion Loss:** 3.5 dB Max. @ 5795 MHz & 5815 MHz  
**Return Loss in PB:** 14 dB Min  
**Rejection1:** 60 dB Min @ DC-5785 MHz  
**Rejection2:** 60 dB Min @ 5825 MHz  
**Impedance:** 50 Ohms  
**Power Handling:** 50 W CW max


## Mechanical

**Mounting Method:** 6-32 Threaded Holes  
**Connector Type:** N (F)  
**Dimensions:** 5.69" x 2.48" x 1.10" max  
144 x 63 x 29 (max) mm

## Environmental

**Operating Temperature:** -40°C to +70°C  
**Storage Temperature:** -55°C to +85°C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200Hz

## Outline Drawing:

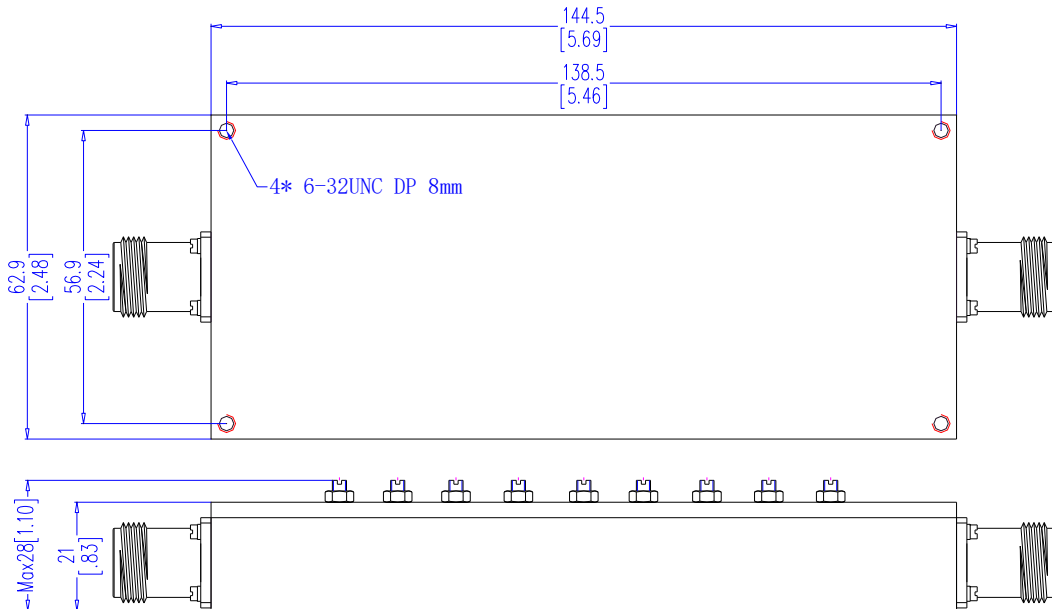

Tolerance: +/-0.01 inches [+/- 0.3mm]

Angles: +/- 1 Deg.

\*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

\*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

**70 Outwater Lane Phone: (973) 772-4242**  
**Garfield, NJ 07026 Fax : (973) 321-3941**

**Email: [sales@anatechelectronics.com](mailto:sales@anatechelectronics.com)**  
**Web: [www.anatechelectronics.com](http://www.anatechelectronics.com)**



# 5795-5815 MHz Cavity Band Pass Filter

Part Number: AB5805B746

**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products



## Simulated Response Plot:

