


**CC-869**

**Screw Terminal Wired  
9 Pin D Connector**

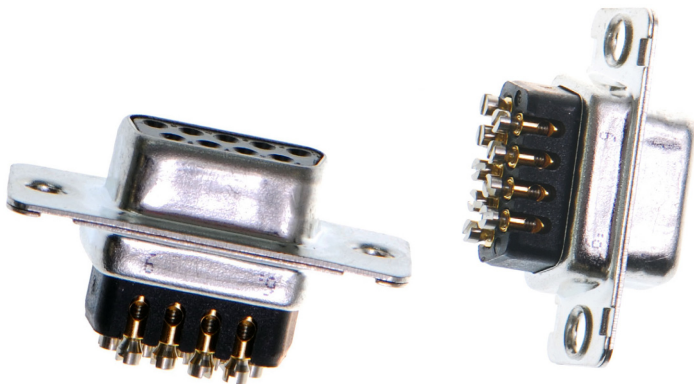

# CC-869

## Screw Terminal Wired 9 Pin D Connector



The CC-869 is suitable for wiring Screw Terminal connections into a standard 9 Pin D connector, ideal for quick but secure solderless connections in the field.

- 9 Pin D female connector
- Screw Terminal contact brass with nickel-plating
- Insulating plastic back shell, with cable strain relief




Many industries use stripped wire screw terminals as the de facto connection method. This adapter enables devices with the ubiquitous 9 pin male D to be used in these situations.

RS422/485 | RS232



Pin 1	TXD-	DCD
Pin 2	TXD+ <td>RXD</td>	RXD
Pin 3	RTS- <td>TXD</td>	TXD
Pin 4	RTS+ <td>DTR</td>	DTR
Pin 5	GND	GND
Pin 6	RXD- <td>DSR</td>	DSR
Pin 7	RXD+ <td>RTS</td>	RTS
Pin 8	CTS	CTS
Pin 9	CTS+ <td>RI</td>	RI

Pinout (9 Pin)



Please refer to the manufacturer's information for the product you wish to connect.

To fit CC-869 you will need: wire cutters, wire strippers, small screw driver (not included).



- Prepare wire to be connected
- Insert trimmed wire into appropriate terminal connection  
- tighten screws to secure connection



- Clip the wired connector in to the plastic housing
- Secure the cable using the cord grip
- Push the two halves of the plastic casing together until they click.



**brainboxes**  
www.brainboxes.com

## Brainboxes

18 Hurricane Drive,  
Liverpool International Business Park,  
Speke, Liverpool,  
L24 8RL

Tel: +44 (0) 151 220 2500

Fax: +44 (0) 151 252 0446

Email: [sales@brainboxes.com](mailto:sales@brainboxes.com)

Web: [www.brainboxes.com](http://www.brainboxes.com)

### Brainboxes - USA

14004 Roosevelt Boulevard  
Suite 601H, Clearwater,  
Florida 33762  
United States

Tel: +1 (919) 241 8487

Fax: +1 (727) 538 4237

Email: [Owen@brainboxes.com](mailto:Owen@brainboxes.com)

### Brainboxes - Japan

8-26-5-506 Kamedio,  
Koto-ku  
Tokyo, 136-0071  
Japan

Tel: +81-3-3683-0509

Fax: +81-3-3683-0509

Email: [r-kibe@brainboxes.co.jp](mailto:r-kibe@brainboxes.co.jp)

