

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
—	—


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	PRODUCTION RELEASE PER ECO-13-014747	9-18-13	CT	RL

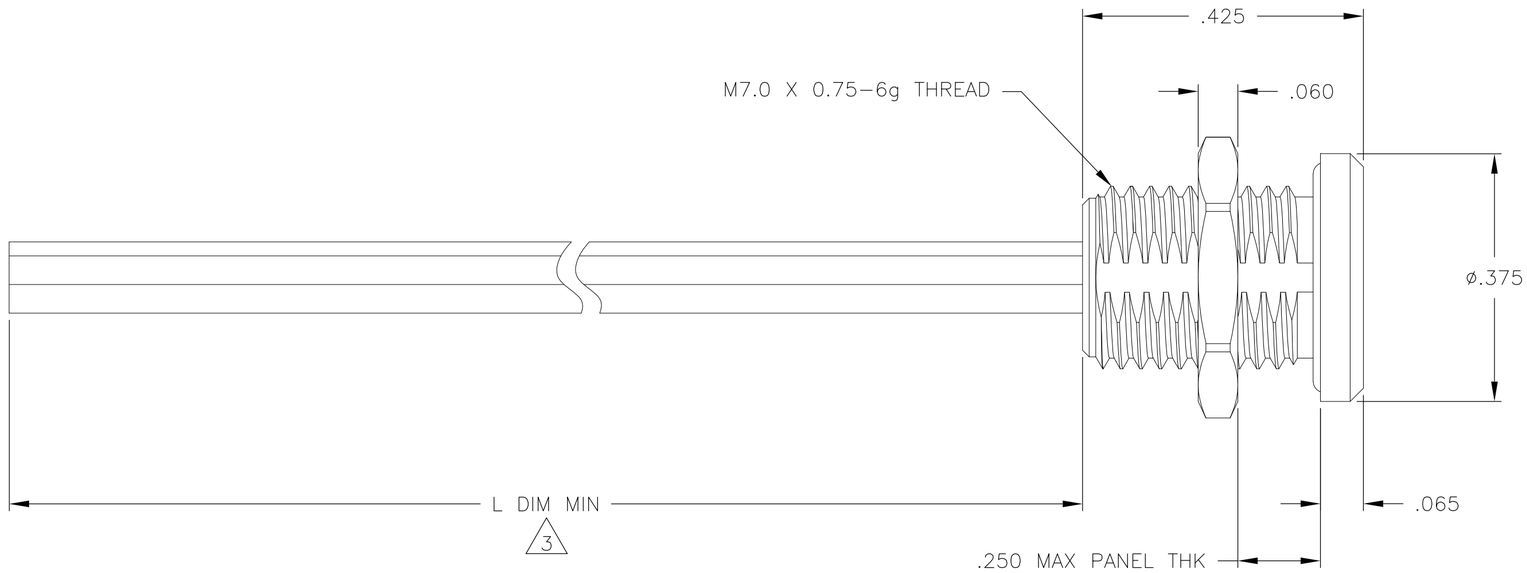

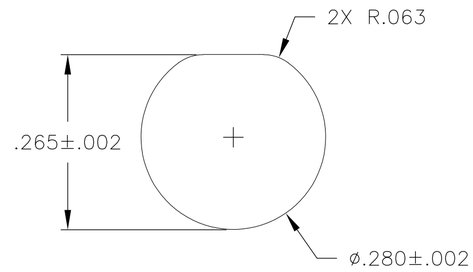

SUGGESTED PANEL
CUT-OUT

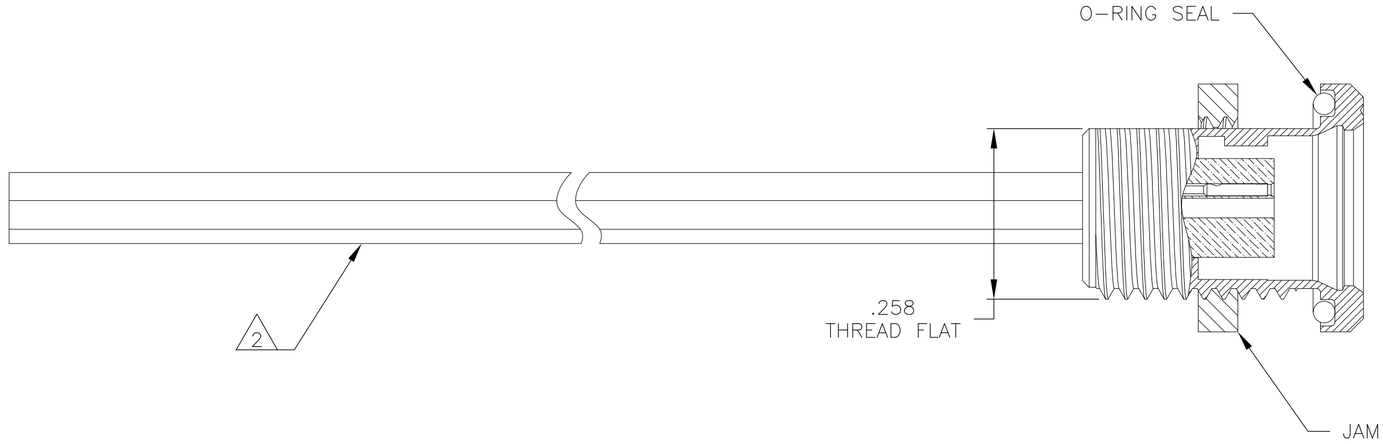

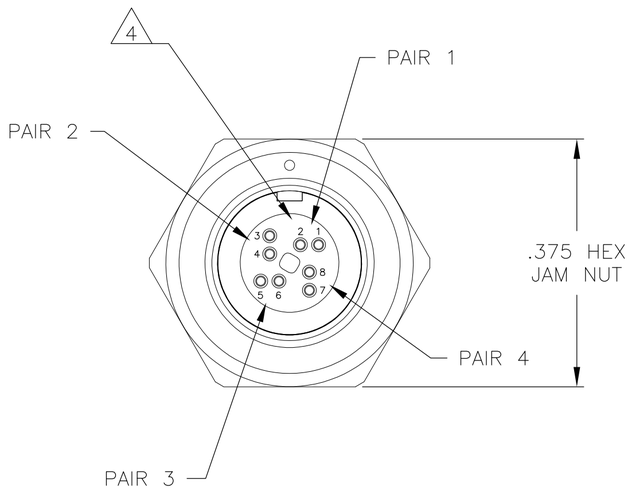

1. CONNECTOR BODY AND JAM NUT MATERIAL:
   6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404
   INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138
   O-RING MATERIAL: FLUOROSILICONE PER SAE-AMS-R-25988
2. TERMINATED WITH MADISON CABLE 30 AWG 10G TURBO TWIN PAIR
3. CABLE LENGTH IS AS INDICATED IN THE CORRESPONDING NANONICS PART NUMBER
4. CAVITY POSITIONS ARE SHOWN FOR REFERENCE ONLY AND ARE NOT MARKED ON THE PART
5. LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
6. REFERENCE TE PRODUCT SPECIFICATION 108-32048 FOR PRODUCT DETAILS AND PERFORMANCE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± .010
3 PLC ± .005
4 PLC ± –
ANGLES ± 1°

MATERIAL: SEE NOTES
FINISH: SEE NOTES

DWN M STORRY 2 AUG 2012
CHK M STORRY 2 AUG 2012
APVD M STORRY 2 AUG 2012
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: RECEPTACLE ASSEMBLY, CIRCULAR, FRONT FLUSH MOUNT, QUICK DISCONNECT, METAL, 8 POS, 10GbE, CeeLok FAS-T Nano Circular

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	0PJN9	C-1925257	—

CUSTOMER DRAWING | SCALE 6:1 | SHEET 1 OF 1 | REV A

1925257