
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00670	Connector, 3 pin M5 plug, 5xL15.4mm, gold plated, molding style, solder cup, IP67, shielded	2	
2	30-01638	Wire, 3C TS, 28 AWG, 150V, 70C, 2.8 mm, shielded, TPU, WBL	1	
3	24-00356	Overmold, M5 shielded, 180°, Ø7.5xL22 mm	2	TPU, black

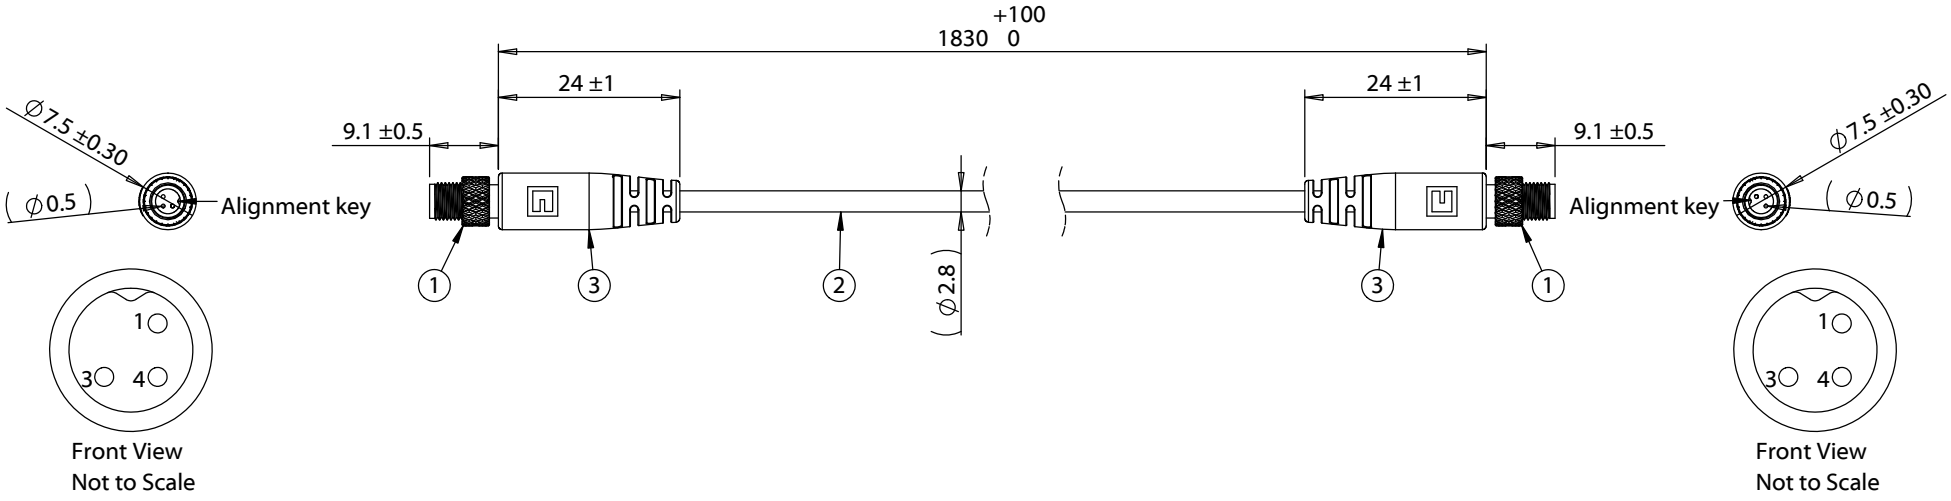

Notes:
Functionally equivalent components may be substituted

IP67 waterproof rating when mated with corresponding (IP67) connector

Cable rated for 60 V, 1.0 A

Wiring Diagram		
50-00670	wire color	50-00670
1	red	1
3	white	3
4	black	4
Shell	shield	Shell

Revision:	Date:	Description:
A	1/11/21	Initial release

Prepared:
AG
Digitally signed by AG
Date: 2021.01.11 11:16:13 -08'00'

Verified:
AW
Digitally signed by AW
Date: 2021.01.15 10:45:52 -08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 0.5 mm 3C 50-00670 M5 plug to same, 28 AWG, 30-01638 wire, IP67, shielded

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-03874

Scale: 1:1

Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1