
| Part Number | Length (Meters) |
|---|---|
| CA0912C800401012 | 1 (3.28 FEET) |
| CA0912C800402012 | 2 (6.56 FEET) |
| CA0912C800403012 | 3 (9.84 FEET) |
| CA0912C800405012 | 5 (16.40 FEET) |
| CA0912C800407012 | 7 (22.96 FEET) |
| CA0912C800410012 | 10 (32.80 FEET) |
| CA0912C800413012 | 13 (42.65 FEET) |
| CA0912C800415012 | 15 (49.21 FEET) |

| REVISIONS | | | | | | | |
|---|---|---|---|---|---|---|---|
| REV | ZONE | ECO | DESCRIPTION | DATE | BY | CHK | APPR |
| A1 | - | - | TECHNICAL DATA SHEET RELEASE | 20-JULY-17 | RO | - | – |





FEMALE CONNECTOR PLUG

MALE CONNECTOR PLUG

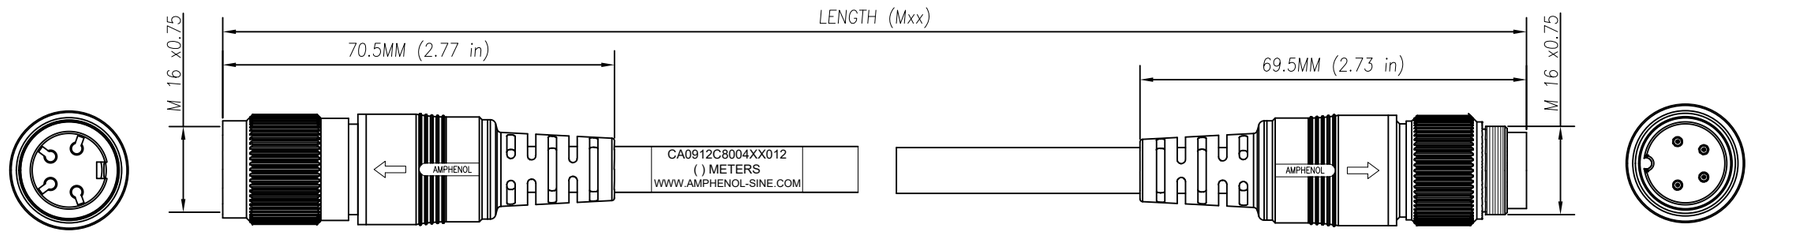


WIRING DIAGRAM

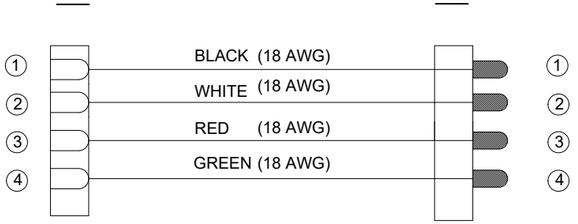



CAN BE USED WITH MATING MALE RECEPTACLE # CA0911G114005

CONTACT YOUR DISTRIBUTOR FOR OTHER MATING OPTIONS




FACE VIEW




FACE VIEW

CAN BE USED WITH MATING FEMALE RECEPTACLE # CA0911F114005

CONTACT YOUR DISTRIBUTOR FOR OTHER MATING OPTIONS

TECHNICAL DATA:

1) MATERIALS:
   - COUPLING NUT: ZINC DIE CAST
   - INSULATION INSERT: THERMOPLASTIC
   - CONTACT: SILVER PLATED
   - OVERMOLD MATERIAL: THERMOPLASTIC  COLOR: BLACK
   - CABLE RATING: UL LISTED, UL RECOGNIZED AWM STYLE AND CSA CERTIFIED, PLTC 105°C 300V
   - CABLE JACKET MATERIAL: PVC  COLOR:  BLACK
   - CONDUCTOR INSULATION: SR-PVC
   - NUMBER OF CONDUCTORS: (4) 18AWG

2) CONNECTOR ELECTRICAL DATA:
   - CURRENT (MAX): 10A AT 40°C
   - VOLTAGE (MAX): 250V AC/DC PER UL 1977
   - INSULATION RESISTANCE: 10M OHMS PER IEC 60512-3-1
   - RATED IMPULSE WITHSTAND VOLTAGE: 1500V PER IEC60664-1

3) CONNECTOR MECHANICAL DATA:
   - TEMPERATURE RANGE: -25°C TO +100°C
   - PROTECTION: IP67/IP68 (PER MATED CONDITION)
   - MATING CYCLES: >500

4) RoHS COMPLIANT

| TOLERANCE | |
|---|---|
| 0-2.99 M = +100.0/-25.0mm | 0-9.99 FT = +4" / -1" |
| 3-8.99 M = +150.0/-25.0mm | 10.00-29.99 FT = +6" / -1" |
| 9-14.99 M = +300.0/-25.0mm | 30.00-49.99 FT = +12" / -1" |
| 15-OVER M = +450.0/-25.0mm | 50 FT-OVER = +18" / -1" |

INDUSTRIAL@AMPHENOL TRUSTED GLOBALLY

| QUANTITY | PART NUMBER | DESCRIPTION | ITEM |
|---|---|---|---|
| | MATERIALS LIST | | |

UNLESS OTHERWISE SPECIFIED
1) All dimensions are in metric(mm).
2) Tolerances are as follows:
1 PL DEC ±0.30 | Fractions ±1/64
2 PL DEC ±0.15 | Angles ±1°
3 PL DEC ±0.08
3) Note reference = 3

MATERIAL SPECIFICATIONS:

PROCESS SPECIFICATIONS: IPC-WHMA-A-620

NEXT ASSY:

| SIGNATURES | | DATE |
|---|---|---|
| DRAWN | RO | 20-JUNE-17 |
| CHECKED: | AA | 21-JUNE-17 |
| ENGINEER: | RO | |
| APPROVAL: | WS | 24-JUNE-17 |

CUSTOMER:

THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

Amphenol

Sine Systems - www.amphenol-sine.com
44724 Morley Drive
Clinton Township, MI 48036

C091 (M16) 4 POS CIRCULAR MOLDED, STD. STRAIN RELIEF, M-F, 18AWG, 4C

| SIZE | TYPE | DWG NO: | REVISION |
|---|---|---|---|
| | C- | CA0912C8004XX012 | A1 |

SCALE: HALF | CA0912C8004XX012 | SHEET 1 OF 1

TITLE:
DWG NO:
REV:
SHT:
OF: