

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	51-00023.M	Connector, PPL7, 6C, 0° socket, 7x38 mm, chrome, solder, Ø2.5-5.2 mm wire, molding style	1	
2	30-00671	Wire, 5C BC, 28 AWG, UL20280, 300V, 80C, 4.5 mm braided shield, FT2, TPU	1	
3	24-00206	Overmold, PPL7 strian relief, 10x24 mm	1	TPU
4	Heat shrink	Black	1	covers jacket end
5	Heat shrink	Black	1	covers drain

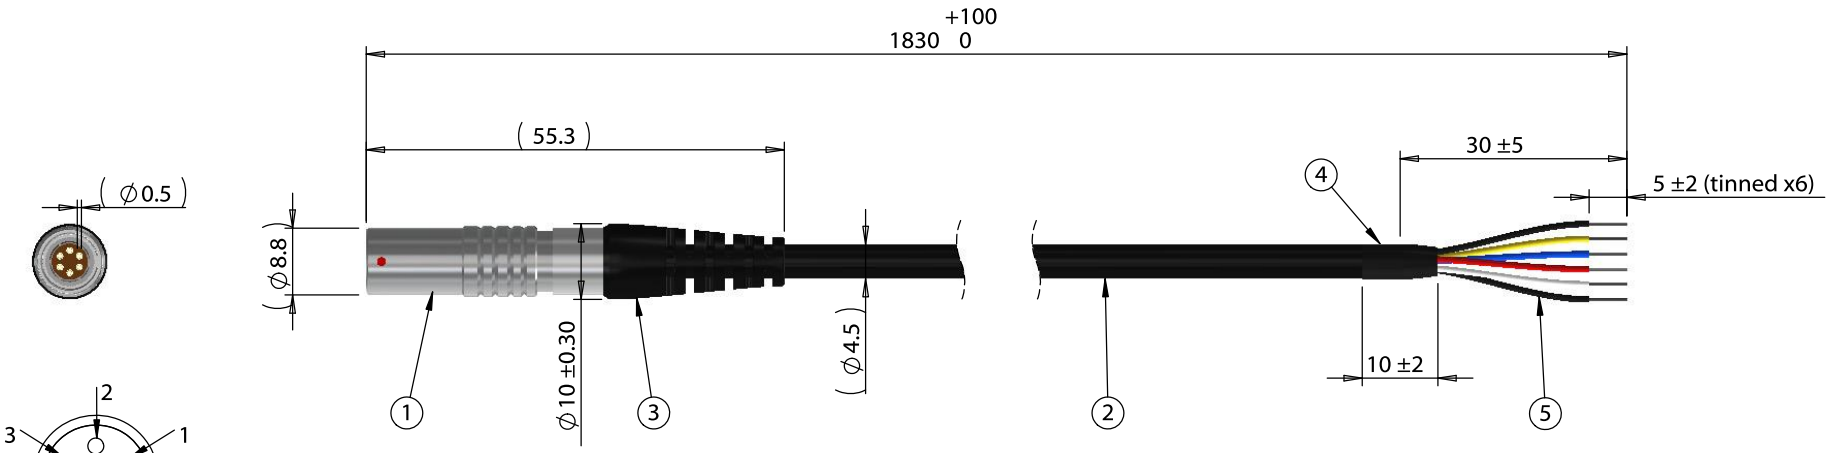

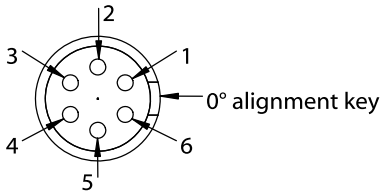

Front View
(Not to Scale)

Wiring Diagram 50-00023.M	wire color
1	Red
2	White
3	Black
4	Yellow
5	Blue
6	Drain/ Shield

Revision:	Date:	Description:
A	3/27/2018	Initial release

Prepared: AG
Digitally signed by AG
Date: 2018.04.19 16:31:56 -07'00'

Verified: AW
Digitally signed by AW
Date: 2018.04.19 16:37:40 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 6C PPL7 socket 51-00023.M, to stripped tinned, 28 AWG, UL20280 30-00671

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-02473

Scale: 1:1

Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1