


| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|---|---|---|---|---|
| A | | 2021-08-27 | Allen Pan | Rev.03 To Rev.A |
| | | | | |
| | | | | |

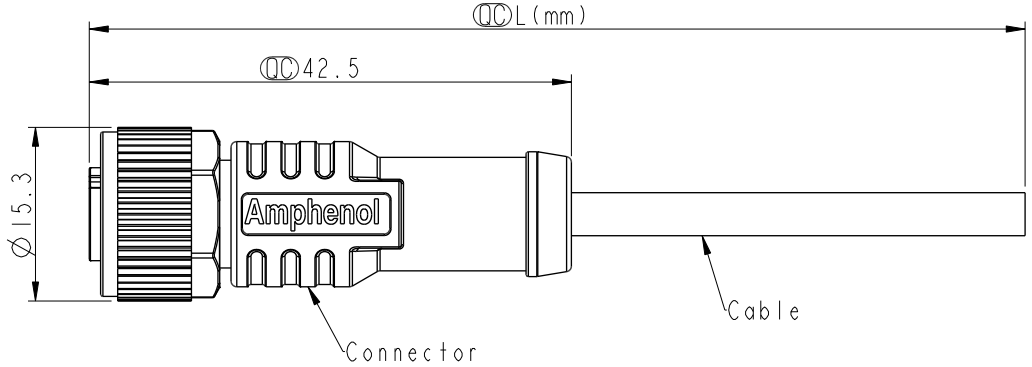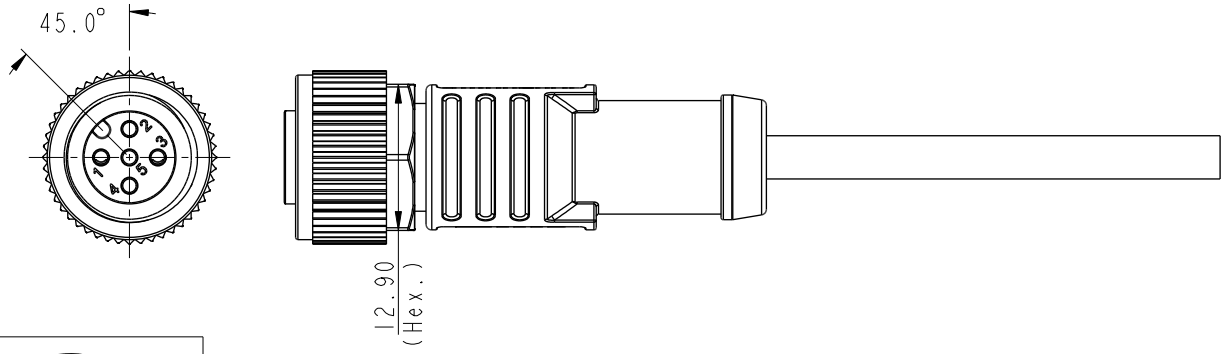

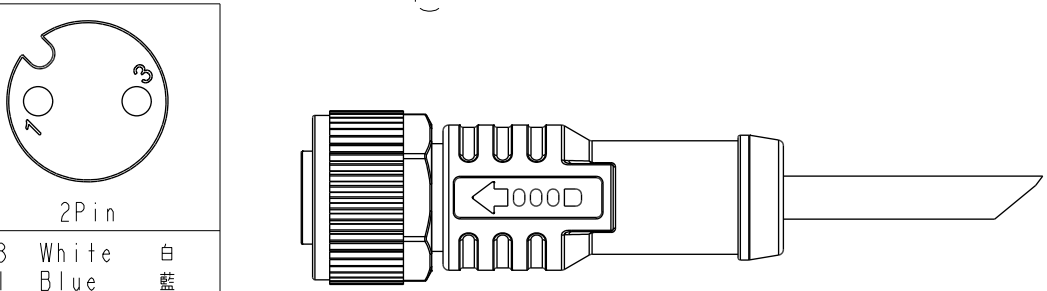


2Pin

| Pin# | Wire |
|---|---|
| 3 | White 白 |
| 1 | Blue 藍 |

Pin Assignments
Front View

MI2A-XXBFFM-SL8CXX

XX:No. Of Pin

XX:01~15Meters
01:01Meter
02:02Meters
:
15:15Meters

Note:
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, mated 1m/24h
  IPX9K, mated
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  O-Ring: Rubber, Green
  Nut: Metal
  Outer mold: Thermoplastic, Black
* Cable: IEC61156-12, 26#*1P+AL/MY+B, OD=3.8mm,
  PUR Jacket, Green
* Cable length tolerance: 1M: +50/-0 mm
  1M < L ≦ 3M: +100/-0 mm
  3M < L ≦ 5M: +150/-0 mm
  5M < L ≦ 10M: ±100 mm
  10M < L ≦ 15M: ±200 mm

UNIT:mm

TOLERANCE
±0.5mm

TITLE: N SEN, MI2 A, SCREW
CABLE W/O SR, F, F, MOLDING

SCALE 3:2 | SIZE A4 | SHEET 1 OF 1
REV. A | WC-REV. A.1 | QC:Inspection item

**Amphenol LTW**
**安費諾亮泰企業股份有限公司**

| ITEM NO | DRAWN BY | DATE |
|---|---|---|
| | Allen Pan | 2021-08-27 |
| DWG NO: MI2A-XXBFFM-SL8CXX | CHECKED BY: Sam Ho | DATE: 2021-08-27 |
| CUSTOMER: ALTW | APPROVED BY: Fred Lee | DATE: 2021-08-27 |

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.