

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-08-27	Allen Pan	Rev.02 To Rev.A

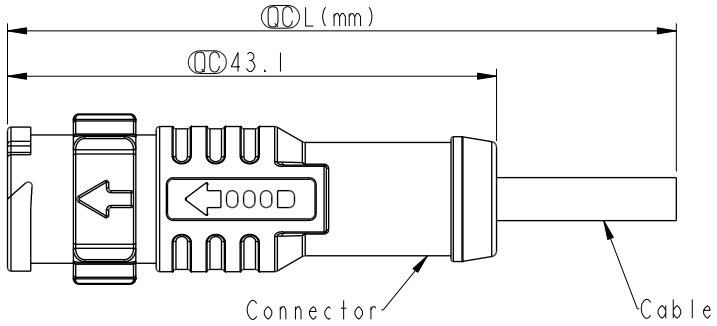



AD-XXBMMM-QL8PXX

XX:No. Of Pin


XX:01~15Meters
01:01Meter
02:02Meters
:
:
15:15Meters



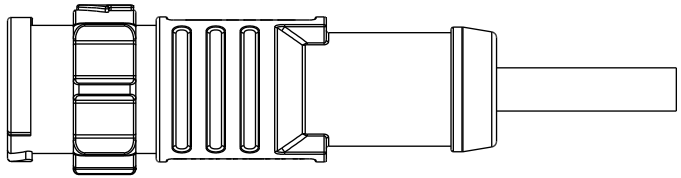

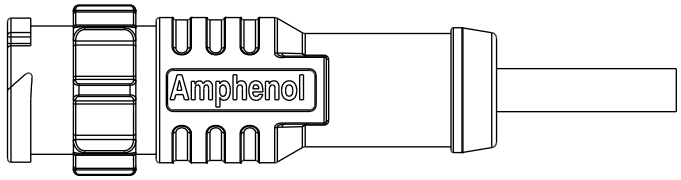

Note:
* RoHS Compliant
* QC Important Dimension
* Waterproof Rate: IPX8, Mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper Alloy, Gold Plated
  Outer Mold: Thermoplastic, Black
* Cable: IEC61156-12, 26#*1P+AL/MY+B, OD=3.8mm,
  PUR Jacket, Green
* Cable Length Tolerance: 1M: +50/-0 mm
  1M < L ≦ 3M: +100/-0 mm
  3M < L ≦ 5M: +150/-0 mm
  5M < L ≦ 10M: ±100 mm
  10M < L ≦ 15M: ±200 mm



2Pin

Pin#	Wire
3	White 白
1	Blue 藍

Pin Assignments
Front View

UNIT:mm

TOLERANCE

±0.5mm

TITLE: X-Lok A-Size
Molding M Conn M Pin

SCALE 3:2 | SIZE A4 | SHEET 1 OF 1

REV. A | WC-REV. A.1 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Allen Pan	DATE: 2021-08-27
DWG NO: AD-XXBMMM-QL8PXX	CHECKED BY: Sam Ho	DATE: 2021-08-27
CUSTOMER: ALTW	APPROVED BY: Fred Lee	DATE: 2021-08-27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.