





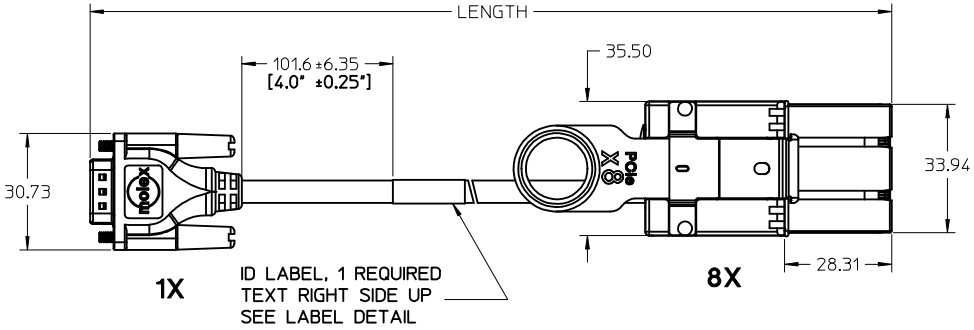

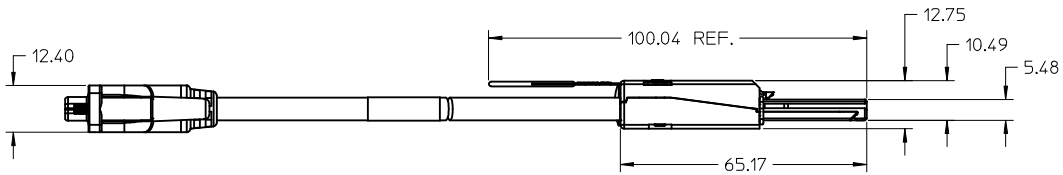

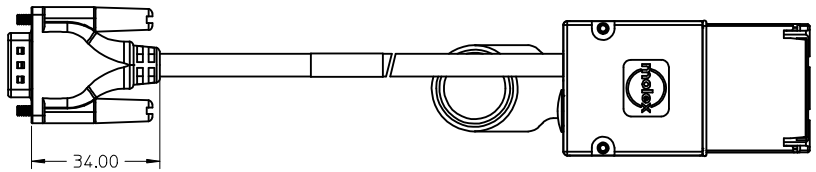

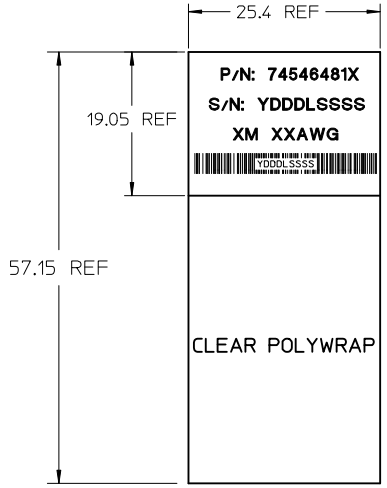

ID LABEL DETAIL
SCALE 2:1

LABEL TO CONTAIN THE FOLLOWING INFORMATION:

YDDDLSSSS
Y = LAST DIGIT OF YEAR
DDD = DAY OF THE YEAR
L = LOCATION (1 = HPC; 2 = GUAD; 3 = DG)
SSSS = SERIAL NUMBER

MOLEX P/N	LENGTH	AWG	TOLERANCE
745464810	0.5M	28	0.025M
745464811	1M	28	0.025M
745464812	2M	28	0.025M
745464813	3M	28	0.025M
745464814	4M	26	0.05M
745464815	5M	26	0.05M
745464816	6M	24	0.08M
745464817	7M	24	0.08M

NOTES:
1. MATERIAL=
   BACKSHELLS - ZINC DIECAST
   PULL - DUPONT ZYTEL ST801 NYLON 6/6
2. LENGTH AND TOLERANCE - SEE TABLE
3. ELECTRICAL PERFORMANCE PER PCI EXPRESS EXTERNAL CABLING SPEC.
4. PLUG MATES TO RECEPTACLE 755860002, AND EMI GUIDE HOUSING ASSY. 745400100
5. LEAD FREE, NO ROHS EXEMPTIONS.
6. NOT COMPLIANT WITH INSERTION LOSS SPEC PER PCIe EXTERNAL CABLING SPECIFICATION.

IPASS™ IS A TRADEMARK OF MOLEX

BAR CODE ON LABEL
EC NO: CPG2015-3293 2014/08/14
DRWN: CHIRSCHY 2014/12/18
CH'KD: JMARTINEZ 2014/12/18
APPR: CHIRSCHY 2014/12/18
DESCRIPTION
REV

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
0 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


		DATE
DRAWN BY	JERWIN	2008/01/28
CHECKED BY	BSCHOESTER	2008/01/28
APPROVED BY	DDOYE	2008/01/28

TITLE: 8X TO 1X PCIE IPASS CABLE ASSEMBLY


molex


MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-74546-481
SHEET NO.: 1 OF 2
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

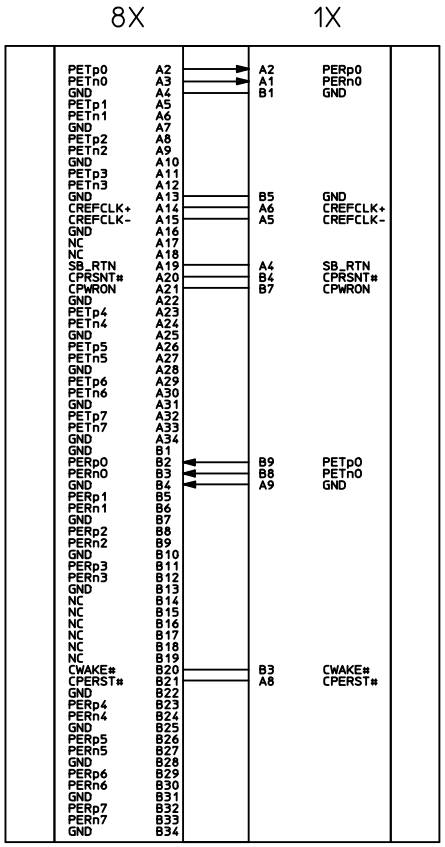


A3, A7, B2, B6 NO CONNECT.
FOR 1X SIDE





AWG	24	28	TOLERANCE
D3	34.00	34.00	REF
D8	6.5	5.80	REF
D9	35.6	32.45	MIN
D10	29.25	26.10	MIN
D11	75.95	72.80	MIN

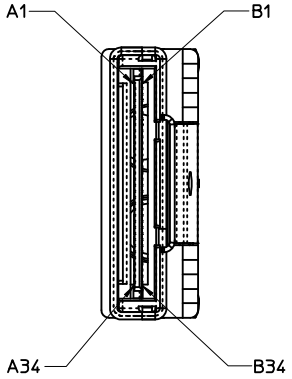

IPASS™ IS A TRADEMARK OF MOLEX

BAR CODE ON LABEL
EC NO: CPG2015-3293 2014/08/14
DRWN:CHIRSCHY 2014/12/18
CH'KD:JMARTINEZ 2014/12/18
APPR:CHIRSCHY 2014/12/18
DESCRIPTION
REV

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
0 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


		DATE
DRAWN BY	JERWIN	2008/01/28
CHECKED BY	BSCHOESTER	2008/01/28
APPROVED BY	DDOYE	2008/01/28


TITLE: 8X TO 1X PCIE IPASS CABLE ASSEMBLY


molex


MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-74546-481
SHEET NO.: 2 OF 2
SIZE: C


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION






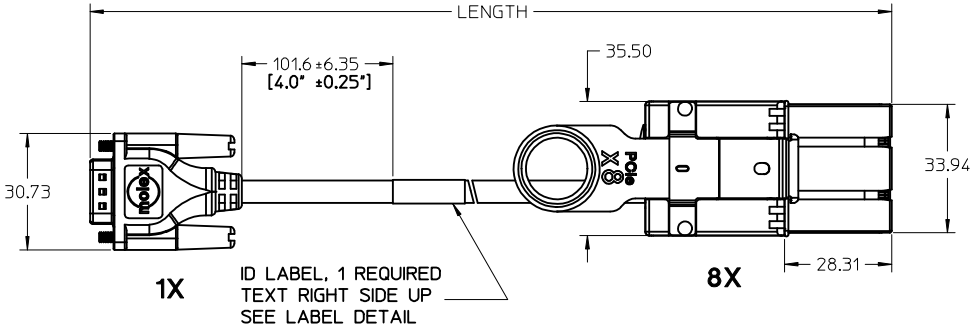

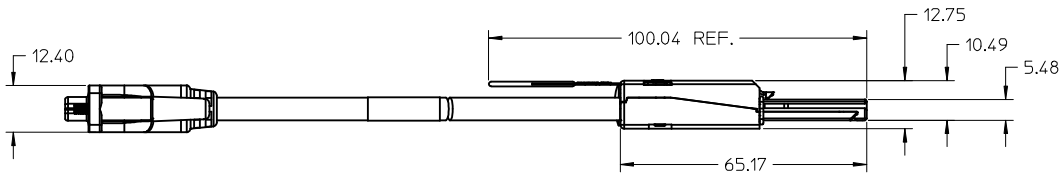

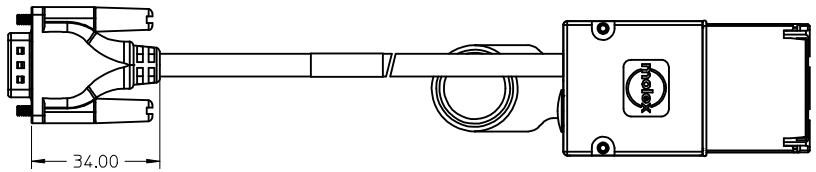

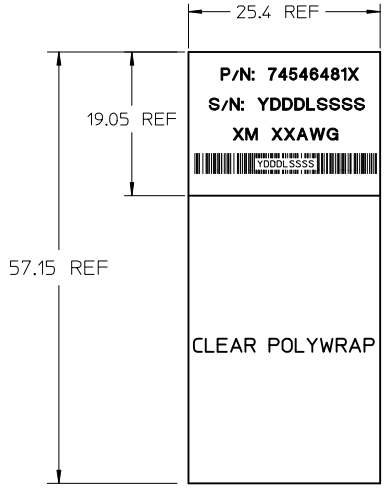

ID LABEL DETAIL
SCALE 2:1

LABEL TO CONTAIN THE FOLLOWING INFORMATION:

YDDDLSSSS
Y = LAST DIGIT OF YEAR
DDD = DAY OF THE YEAR
L = LOCATION (1 = HPC; 2 = GUAD; 3 = DG)
SSSS = SERIAL NUMBER

MOLEX P/N	LENGTH	AWG	TOLERANCE
745464810	0.5M	28	0.025M
745464811	1M	28	0.025M
745464812	2M	28	0.025M
745464813	3M	28	0.025M
745464814	4M	26	0.05M
745464815	5M	26	0.05M
745464816	6M	24	0.08M
745464817	7M	24	0.08M

NOTES:
1. MATERIAL=
   BACKSHELLS - ZINC DIECAST
   PULL - DUPONT ZYTEL ST801 NYLON 6/6
2. LENGTH AND TOLERANCE - SEE TABLE
3. ELECTRICAL PERFORMANCE PER PCI EXPRESS EXTERNAL CABLING SPEC.
4. PLUG MATES TO RECEPTACLE 755860002, AND EMI GUIDE HOUSING ASSY. 745400100
5. LEAD FREE, NO ROHS EXEMPTIONS.
6. NOT COMPLIANT WITH INSERTION LOSS SPEC PER PCIe EXTERNAL CABLING SPECIFICATION.

IPASS™ IS A TRADEMARK OF MOLEX

BAR CODE ON LABEL
EC NO: CPG2015-3293 2014/08/14
DRWN: CHIRSCHY 2014/12/18
CH'KD: JMARTINEZ 2014/12/18
APPR: CHIRSCHY 2014/12/18
DESCRIPTION
REV

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
0 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


		DATE
DRAWN BY	JERWIN	2008/01/28
CHECKED BY	BSCHOESTER	2008/01/28
APPROVED BY	DDOYE	2008/01/28

TITLE: 8X TO 1X PCIE IPASS CABLE ASSEMBLY


molex


MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-74546-481
SHEET NO.: 1 OF 2
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

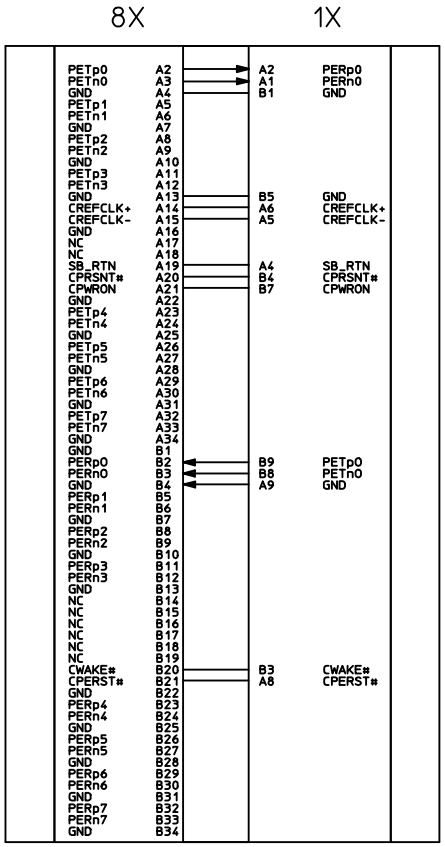


A3, A7, B2, B6 NO CONNECT.
FOR 1X SIDE





AWG	24	28	TOLERANCE
D3	34.00	34.00	REF
D8	6.5	5.80	REF
D9	35.6	32.45	MIN
D10	29.25	26.10	MIN
D11	75.95	72.80	MIN

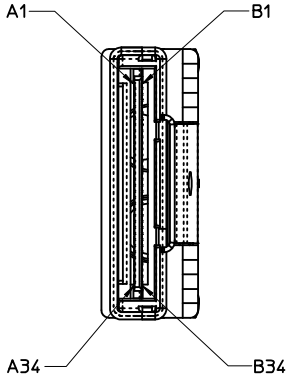

IPASS™ IS A TRADEMARK OF MOLEX

BAR CODE ON LABEL
EC NO: CPG2015-3293 2014/08/14
DRWN:CHIRSCHY 2014/12/18
CH'KD:JMARTINEZ 2014/12/18
APPR:CHIRSCHY 2014/12/18
DESCRIPTION
REV

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.13	± ---
1 PLACE	± 0.25	± ---
0 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	JERWIN	2008/01/28
CHECKED BY	BSCHOESTER	2008/01/28
APPROVED BY	DDOYE	2008/01/28

TITLE: 8X TO 1X PCIE IPASS CABLE ASSEMBLY

molex

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-74546-481
SHEET NO.: 2 OF 2
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION