
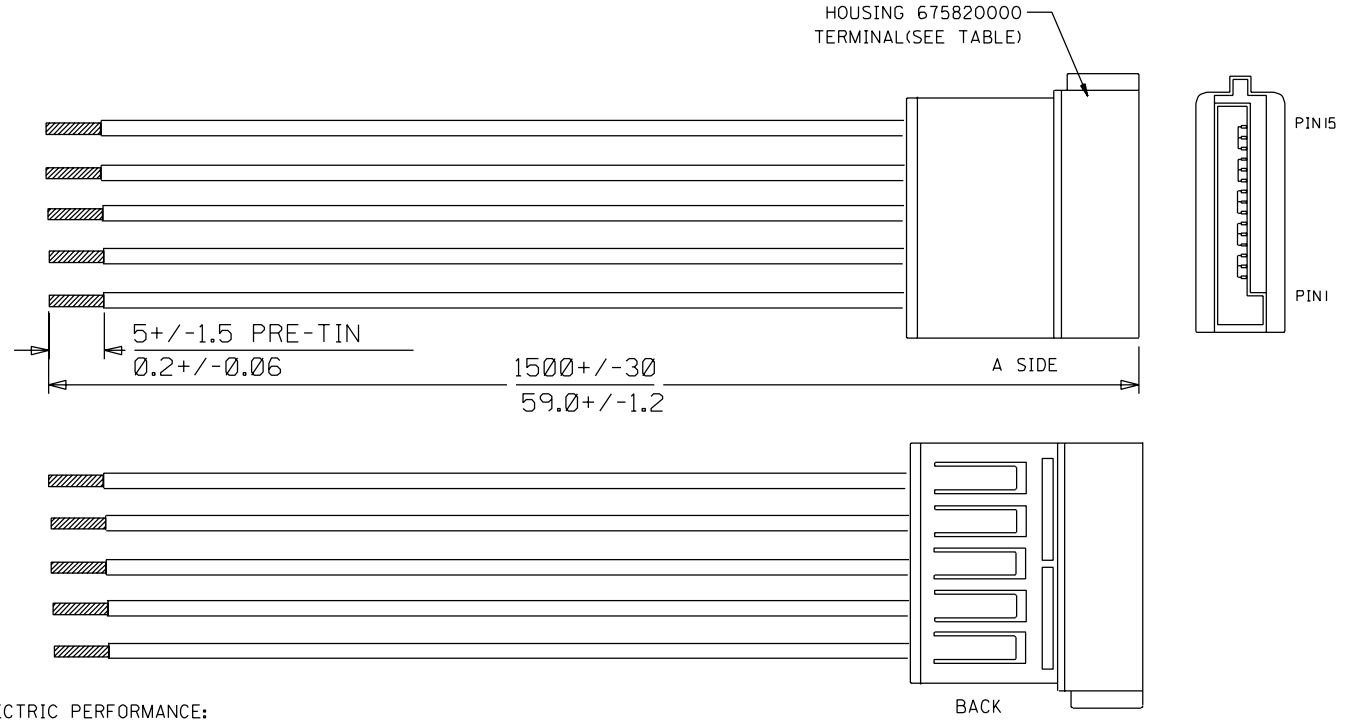


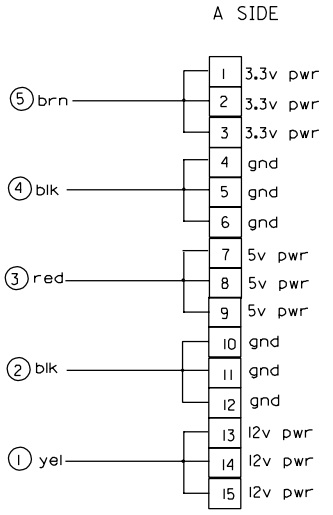

NOTE: 1. ELECTRIC PERFORMANCE:
DIELECTRONIC STRENGTH: 500 V DC/0.01Sec.
INSULATION RESISTANCE: 100M OHMS Min.
CONDUCTIVE RESISTANCE: 2 OHMS Max.
2. HOUSING 675820000:
POLYESTER(PBT), UL94V-0(BLACK)

88757781I	675810001 30u" Gold-plated
8875778I0	675810000 GOLD FLASH
MATERIAL NO.	TERMINAL

TABLE

5	UL1007 #18 BRN 887711305
4	UL1007 #18 BLK 887711300
3	UL1007 #18 RED 887711301
2	UL1007 #18 BLK 887711300
1	UL1007 #18 YEL 887711303
item	WIRE TYPE

CONNECTION DIAGRAM

EC NO. | DRWN: Louis 04/03/23 | CH'K: | APPR: | B
EC NO. | DRWN: BENTZ 02/08/08 | CH'K: | APPR: | A1
DESCRIPTION | REV

QUALITY SYMBOLS
MAJOR ▼ = 0
CRITICAL ▽ = 0

GENERAL TOLERANCES: (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±0.	±.
3 PLACES	±0.	±.
2 PLACES	±0.	±.
1 PLACE	±0.	±.
ANGULAR: ± °		

SCALE | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION

DIMENSIONS: ☐ mm/INCH ☐ INCH/mm ☒ mm ONLY

SHT | REV

REVISE ON CAD ONLY

DRAWN BY & DATE: BENTZ 02/08/08
CHECKED BY & DATE: Tony Wong 02/08/08
APPROVED BY & DATE: Tony Wong 02/08/08

TITLE:
S-ATA POWER TO PIGTAIL CABLE ASSEMBLY 1.5M (3.3V+5V+12V)

MOLEX INCORPORATED

CAD FILENAME: S88755AE.S01
MATERIAL NO.: SEE TABLE
DRAWING NO.: SD-88755-005
SHEET NO.: 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE A4

WBORD_A.BOR REV A
97/05/14 LEVEL 3