


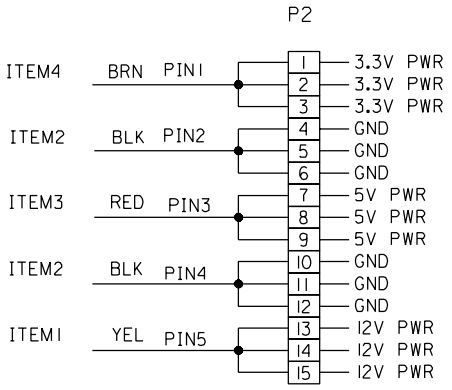

NOTE: 1. ELECTRIC PERFORMANCE:
DIELECTRONIC STRENGTH: 500 V DC/0.01Sec.
INSULATION RESISTANCE: 100M OHMS Min.
CONDUCTIVE RESISTANCE: 2 OHMS Max.

887614710	679260012	30u" Gold-plated
887614700	679260011	Gold Flash
MATERIAL NO	S-ATA CONN.	DESCRIPTION

ITEM	DESCRIPTION	QTY	L(mm)
B	COVER 679260040	1	
A	S-ATA CONN.: SEE TABLE	1	
4	UL1007 #18 BRN 887711355	1	1485
3	UL1007 #18 RED 887711351	1	1485
2	UL1007 #18 BLK 887711350	2	2970
1	UL1007 #18 YEL 887711353	1	1485

EC NO. DRWN: Louis 04/03/11
CH'K:
APPR:

REV	DESCRIPTION
A	

QUALITY SYMBOLS
MAJOR ▼ = 0
CRITICAL ▽ = 0

GENERAL TOLERANCES: (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±0.	±.
3 PLACES	±0.	±.
2 PLACES	±0.	±.
1 PLACE	±0.	±.
ANGULAR: ± °		

SCALE N.T.S
DESIGN UNITS ☒mm ☐INCH
THIRD ANGLE PROJECTION
DIMENSIONS: ☒ mm/INCH ☐ INCH/mm ☐ mm ONLY
SHT REV
REVISE ON CAD ONLY

DRAWN BY & DATE: Louis Chen 03/09/08
CHECKED BY & DATE: David Wang 03/09/08
APPROVED BY & DATE: Ricky Leung 03/09/08

TITLE:
S-ATA IDT POWER TO PIGTAIL CABLE, 1.5M, (3.3V+5V+12V)

MOLEX INCORPORATED

CAD FILENAME: J6147-XX .DGN
MATERIAL NO.: 887-6147-XX
DRAWING NO.: SD-88755-008
SHEET NO.: 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE A4