



**Electrical specifications**

**Center Frequency:** 2350 MHz  
**Bandwidth:** 100 MHz  
**VSWR:** 1.5 : 1  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 2300-2400 MHz  
**Passband Insertion Loss:** 3.5 dB max.  
**Passband Ripple:** 1.0 dB max.  
**Rejection:** 12 dB min at 2280 MHz  
**Rejection 2:** 11 dB min at 2420 MHz  
**Power Handling:** 2 Watt

**Mechanical**


**Mounting Method:** SMT  
**Dimensions:** 38 x 17 x 7.5 mm

**Environmental**

**Operating Temperature:** -10°C to 50°C  
**Storage Temperature:** -50°C to +90°C

**This product is RoHs compliant.**

**Outline Drawing:**

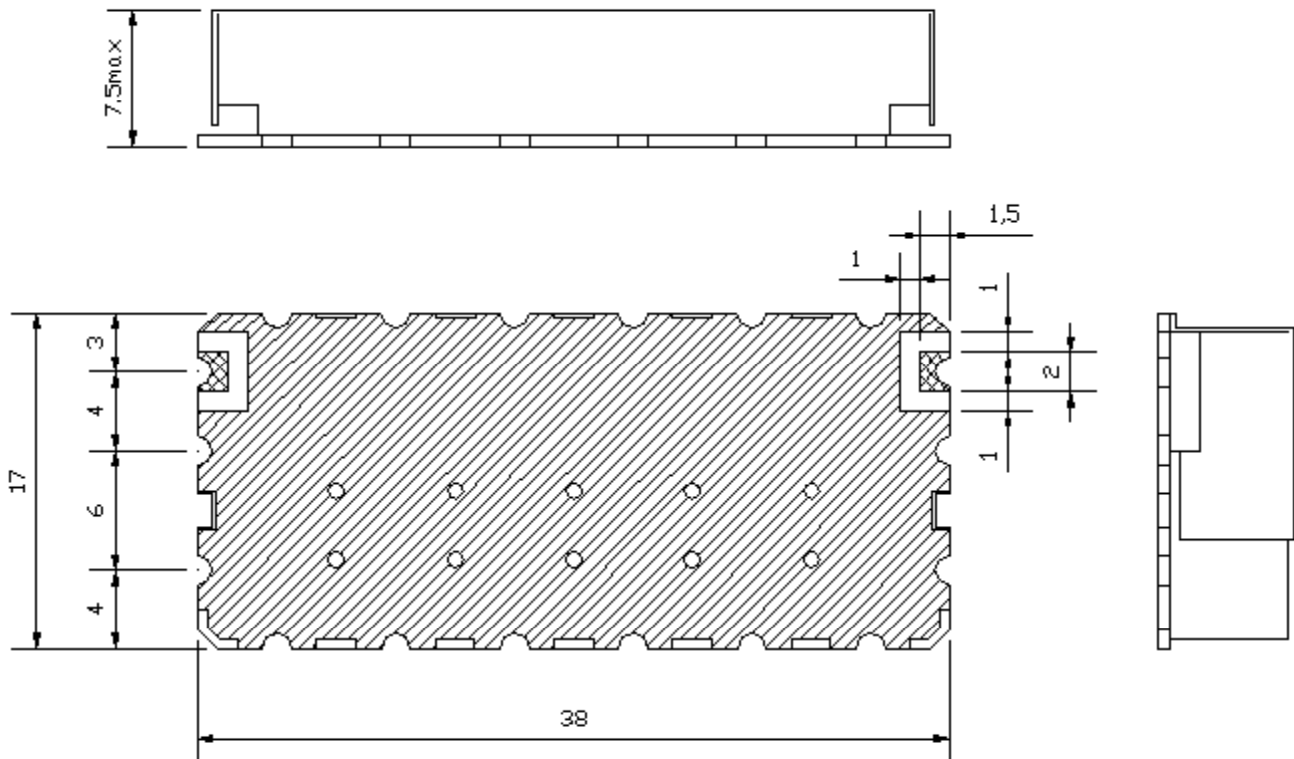

Unit:mm  
Tolerance:±0,3