



**Electrical specifications**

**Center Frequency:** 2000 MHz  
**Bandwidth:** 20 MHz min  
**VSWR:** 1.5 : 1  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 1990-2010 MHz  
**Passband Insertion Loss:** 4.0 dB max  
**Passband Ripple:** 1.0 dB max  
**Rejection:** 65 dBc min at 1800 MHz  
**Rejection 2:** 65 dBc min at 2200 MHz  
**Power Handling:** 1 W

**Mechanical**


**Mounting Method:** SMT  
**Dimensions:** 13 x 12 x 5.5 mm

**Environmental**

**Operating Temperature:** -40°C to 85°C  
**Storage Temperature:** -50°C to +90°C

**This product is RoHs compliant.**

**Outline Drawing:**

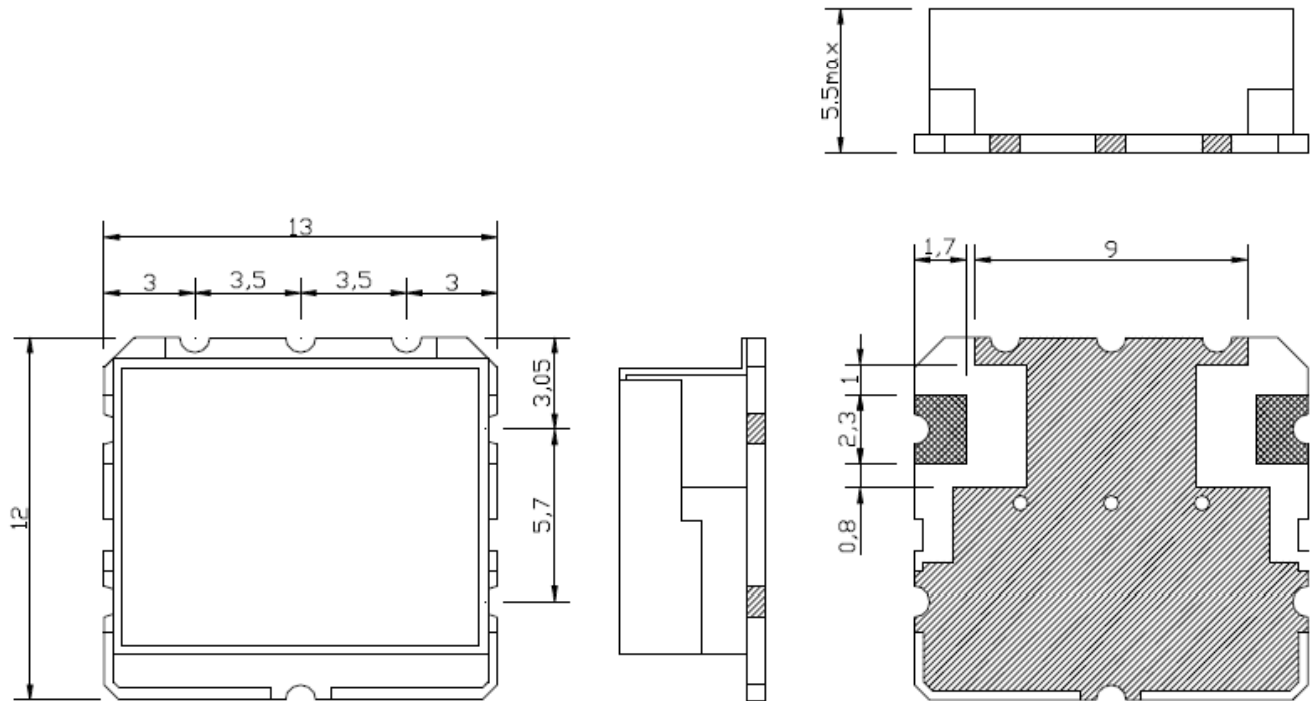

UNIT:mm  
TOLERANCE:±0.3