



**Electrical specifications**

**Center Frequency:** 978 MHz  
**Bandwidth:** FO +/- 5 MHz  
**Input / Output Impedance:** 50 Ohms  
**Passband Insertion Loss:** 3.0 dB max  
**Passband Ripple:** 1.0 dB max  
**Passband Return Loss:** 14 dB min  
**Rejection:** 926 MHz 55 dB min  
**Rejection 2:** 1030 MHz 55 db min  
**Power Handling:** 3W

**Mechanical**


**Mounting Method:** SMT  
**Dimensions:** 11 x 25 x 5 mm

**Environmental**



**Operating Temperature:** -30°C to +85°C  
**Storage Temperature:** -50°C to +90°C

**This product is RoHs compliant.**

**Outline Drawing:**

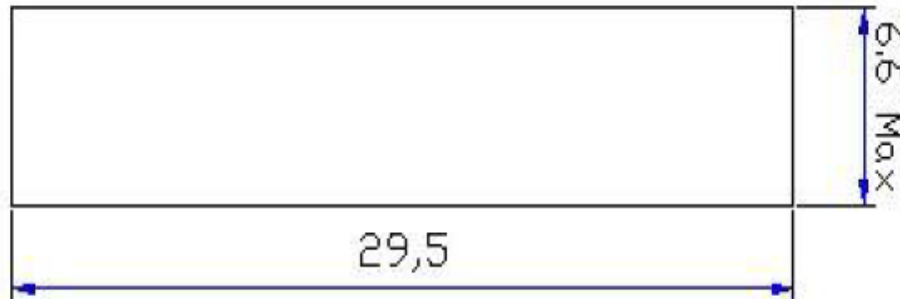

Soldering

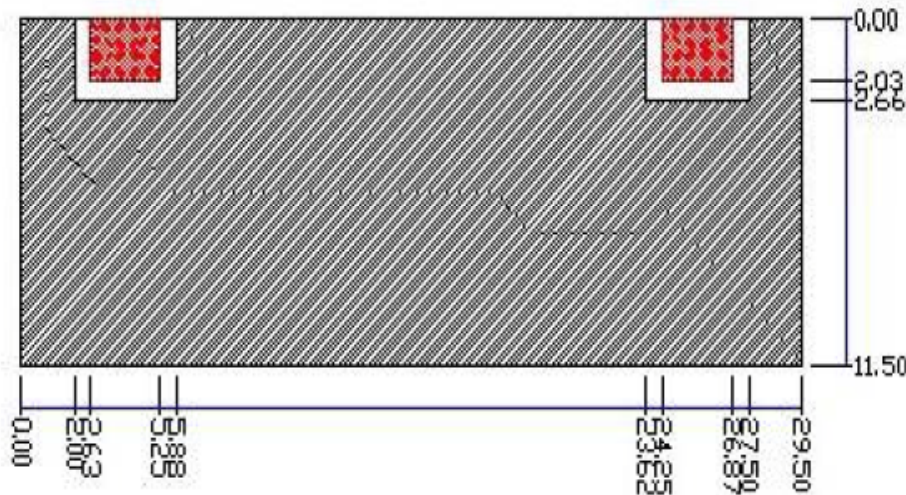



### Response Plot:

