



Electrical specifications

Center Frequency: 2072 MHz
Bandwidth: 110 MHz
VSWR: 1.5 : 1
Insertion Loss (F0): 1.4 dB max
Ripple in BW: 1.0 dB max
Input / Output Impedance: 50 Ohms
Rejection: 50dB min at 1732MHz
Rejection 2: 50dB min at 2412MHz
Power Handling: 2 W min.

Mechanical


Mounting Method: SMT
Dimensions: 18.2 x 14 x 5 mm

Environmental

Operating Temperature: -20 to +70 deg. C
Storage Temperature: -55 to +85 deg. C

This product is RoHs compliant.

Outline Drawing:

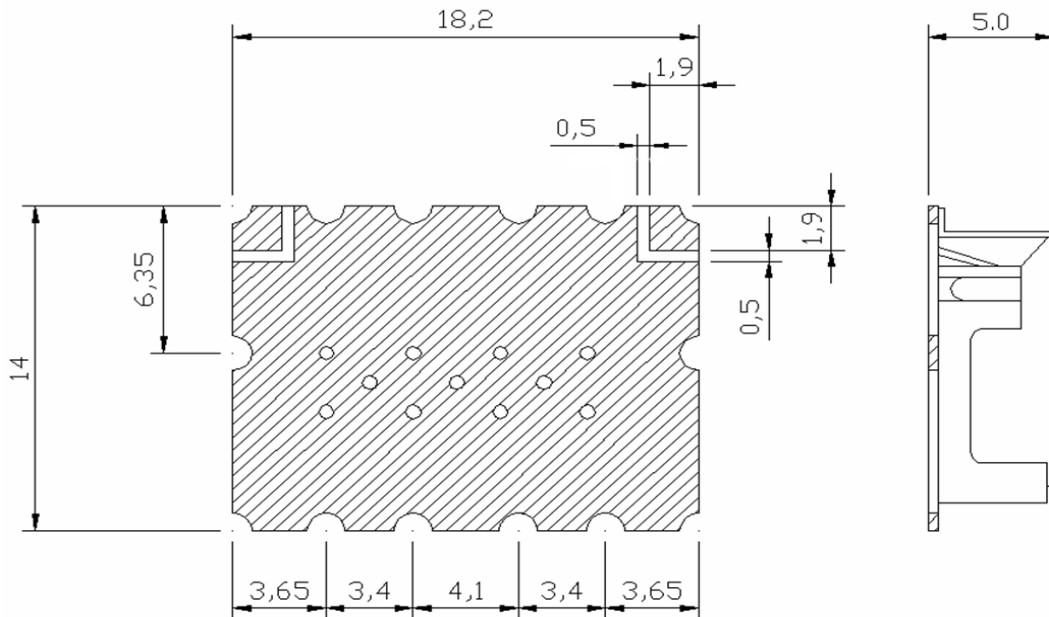


Unit : mm
Tolerance : ± 0.3



2072 MHz Ceramic Bandpass Filter

Part Number: AM2072B1553

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

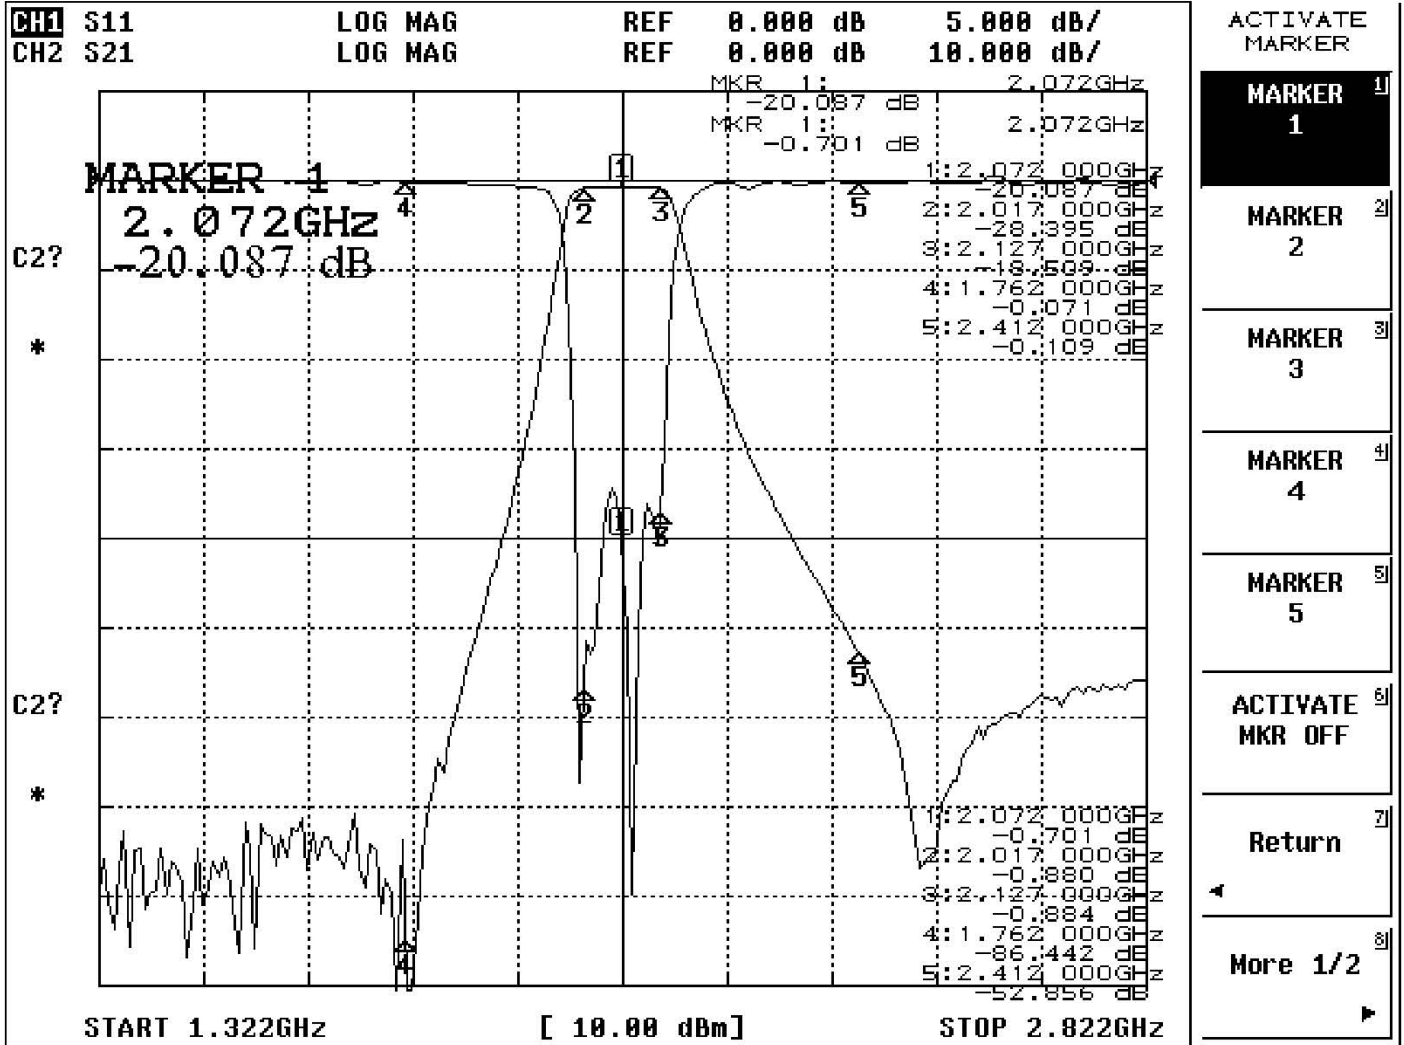

ACTIVATE MARKER

MARKER 1

MARKER 2

MARKER 3

MARKER 4

MARKER 5

ACTIVATE MKR OFF

Return

More 1/2