



Electrical Specifications

Center Frequency: 4000 MHz
Bandwidth: 200 MHz
Pass Band: 3900-4100 MHz
Insertion Loss in BW: 2.5 dB Max
Return Loss in BW: 14 dB Min
Ripple in BW: 1.0 dB Max
Attenuation: >50 dB @ DC~3700 MHz
 >50 dB @ 4430 MHz
 >60 dB @ 4600-6000 MHz
Input Power: 30 dBm Max

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

This product is RoHS complaint.

Outline Drawing:

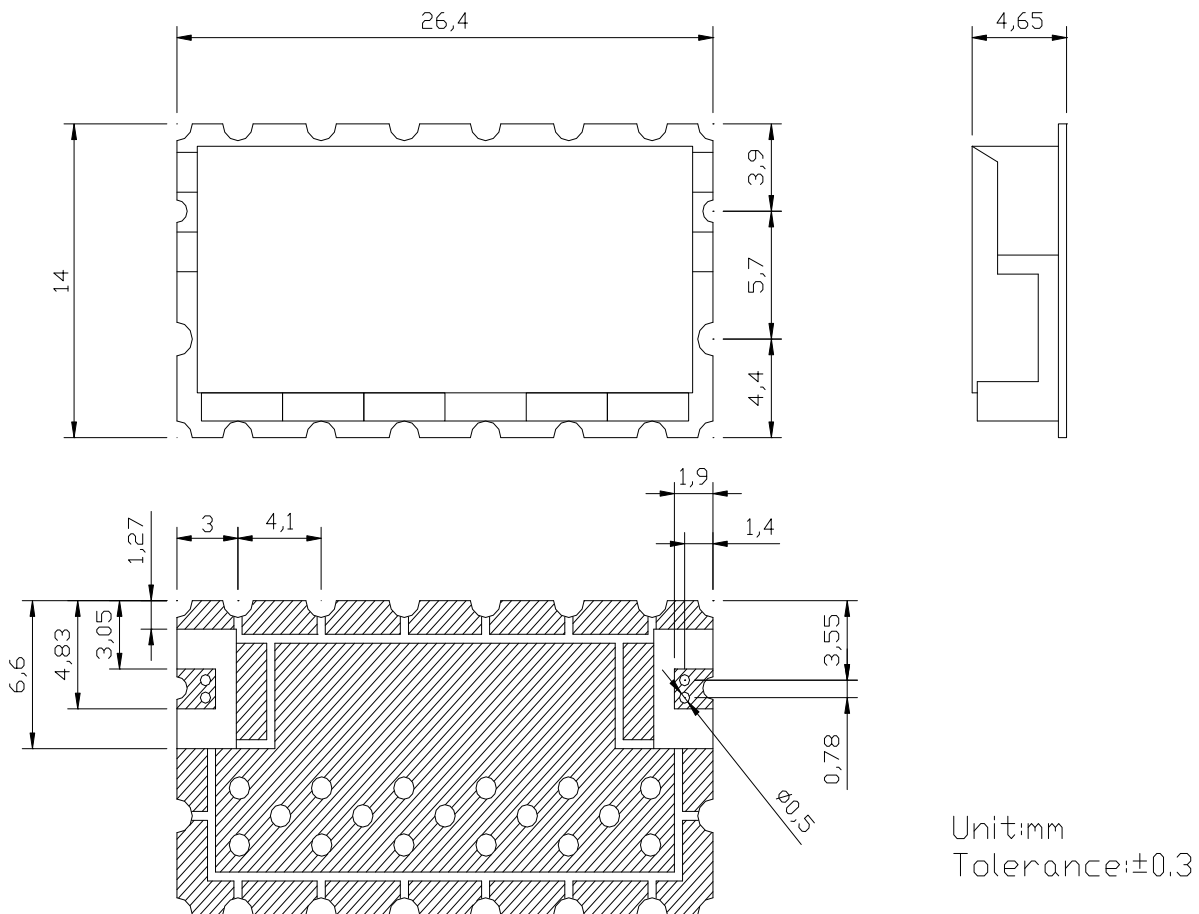



Foot Print:

