



167MHz Ceramic Bandpass Filter

Part Number: AM167B1567




Center frequency(F0)	167.0 MHz
Bandwidth(BW)	10.0 MHz
Insertion Loss	4.0 dB max
Ripple in BW	0.5 dB max
VSWR	14 dB min
Attenuation	25dB min at 200MHz
In/Out Impedance	50 Ohm
Operating Temperature	-20 to +70 °C
Power Input	10 dBm max.
This product is RoHS compliant.	

Mechanical	
Mounting Method:	SMT
Dimensions:	40.6 x 12.7 x 7.0 mm

Environmental	
Operating Temperature:	-40 to +70 deg.C
Storage Temperature:	-50 to +90 deg.C

Outline Drawing:

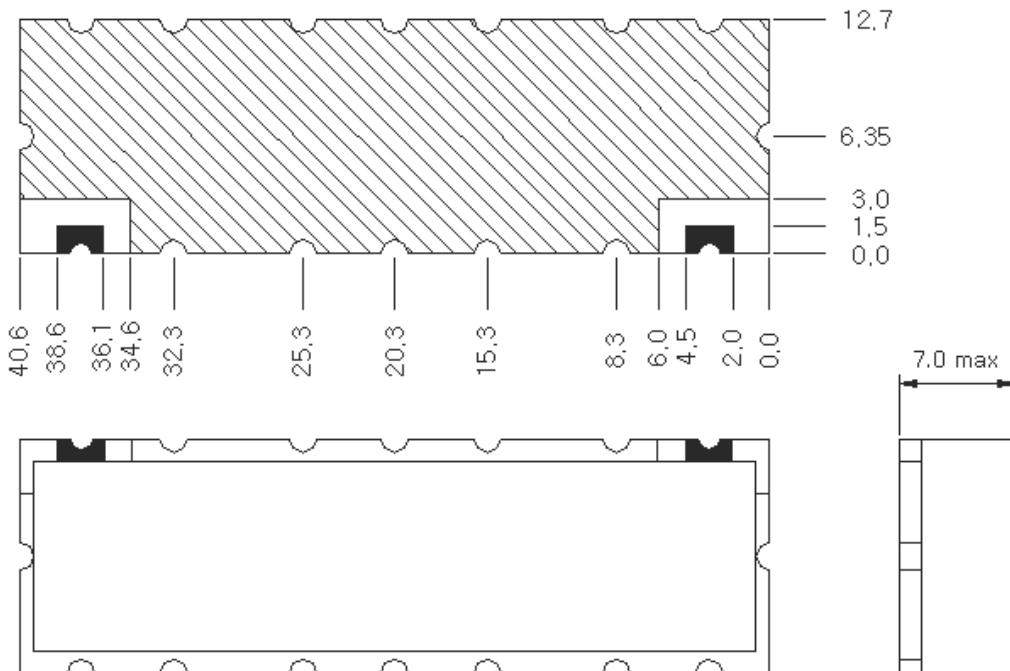

Unit : mm
Tolerance : +/- 0.3