



Electrical specifications

Center Frequency: 921.5 MHz
Bandwidth: 11 MHz
VSWR: 1.5 : 1 min
Input / Output Impedance: 50 Ohms
Passband: 916-927 MHz
Passband Insertion Loss: 2.5 dB max
Passband Ripple: 0.5 dB max
Rejection: 35 dB min at 857-895 MHz
Rejection 2: 35 dB min at 970-1005 MHz
Rejection 3: 40 dB min at 10-857 MHz
Rejection 4: 40 dB min at 1005-1110 MHz
Rejection 5: 30 dB min at 1110-2500 MHz
Power Handling: 1W

Mechanical


Mounting Method: SMT
Dimensions: .72" x .55" x .19"


Environmental

Operating Temperature: -30°C to 60°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

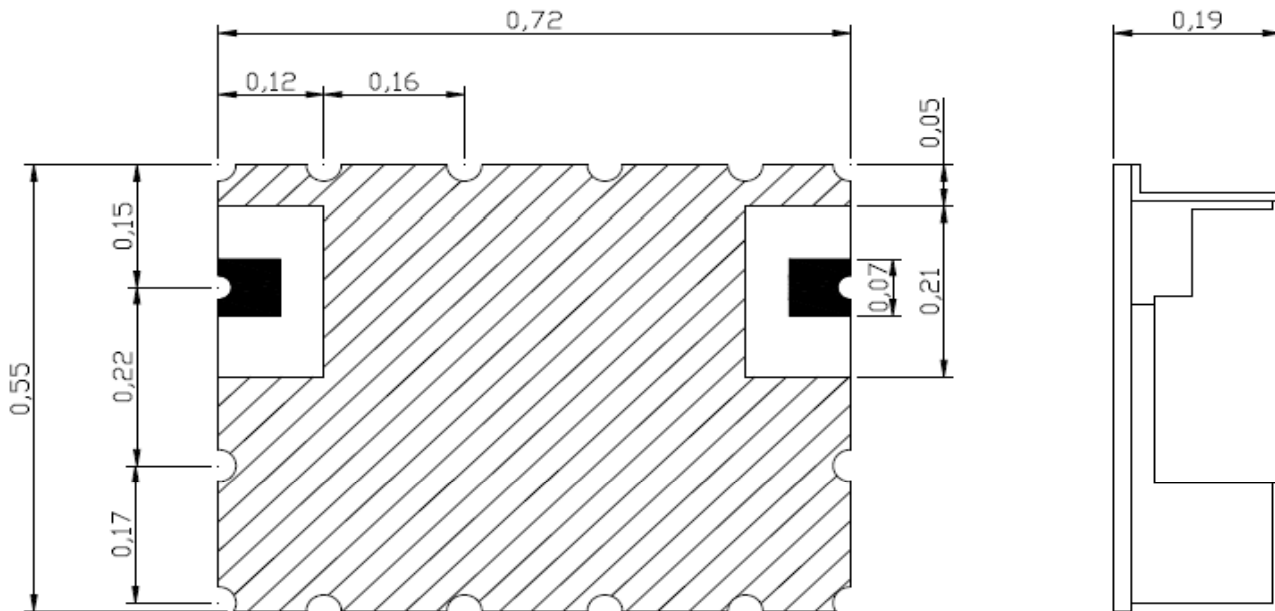

 IN/OUT PORT

 GROUND

UNIT : Inch