



Electrical specifications

Center Frequency: 707 MHz
Bandwidth: 18 MHz
Input / Output Impedance: 50 Ohms
Passband: 698-716 MHz
Passband Insertion Loss: 3.0 dB Max
Passband Ripple: 0.5(0.25) dB Max
Passband Return Loss: 12.0 dB Min
Rejection: @ 628-646 MHz 40.0dB Min
Rejection 2: @ 558-576 MHz 40.0dB Min
Rejection 3: @ 768-786 MHz 30.0dB Min
Power Handling: 1.0 W Max

Mechanical


Mounting Method: SMT
Dimensions: 10.7 x 10.7 x 3.85 mm

Environmental

Operating Temperature: +5°C to +70°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

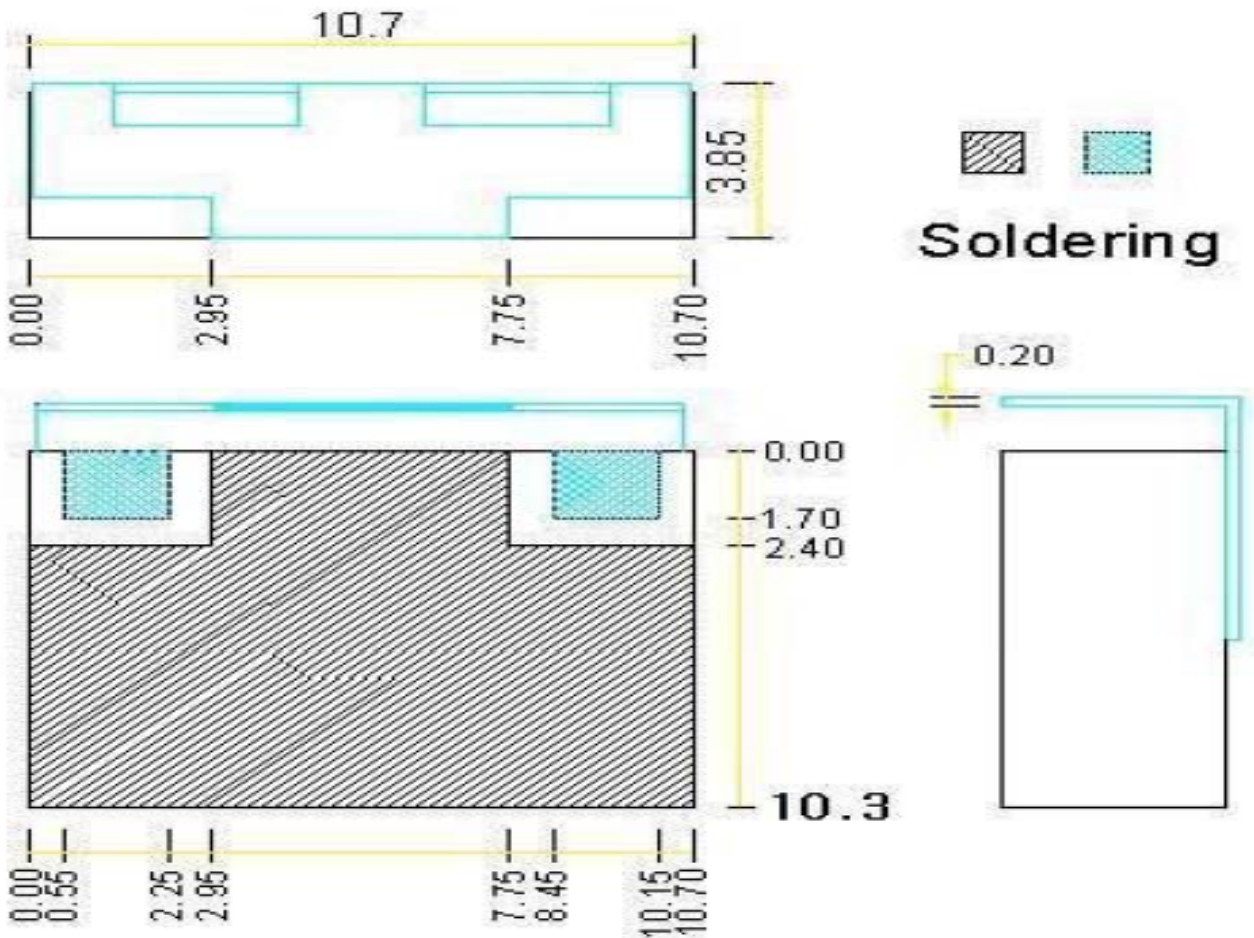

Unit: mm