



Electrical specifications

Center Frequency: 6245 MHz
Bandwidth: 360 MHz min
VSWR: 2.0 : 1
Input / Output Impedance: 50 Ohms
Passband: 6065-6425 MHz
Passband Insertion Loss: 3.0 dB max
Passband Ripple: 1.0 dB max
Rejection: 18 dB min at 5800 MHz
Rejection 2: 22 dB min at 7100 MHz
Power Handling: 1 Watt max

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -10°C to 75°C
Storage Temperature: -50°C to +90°C

This product is RoHS compliant.

Outline Drawing:

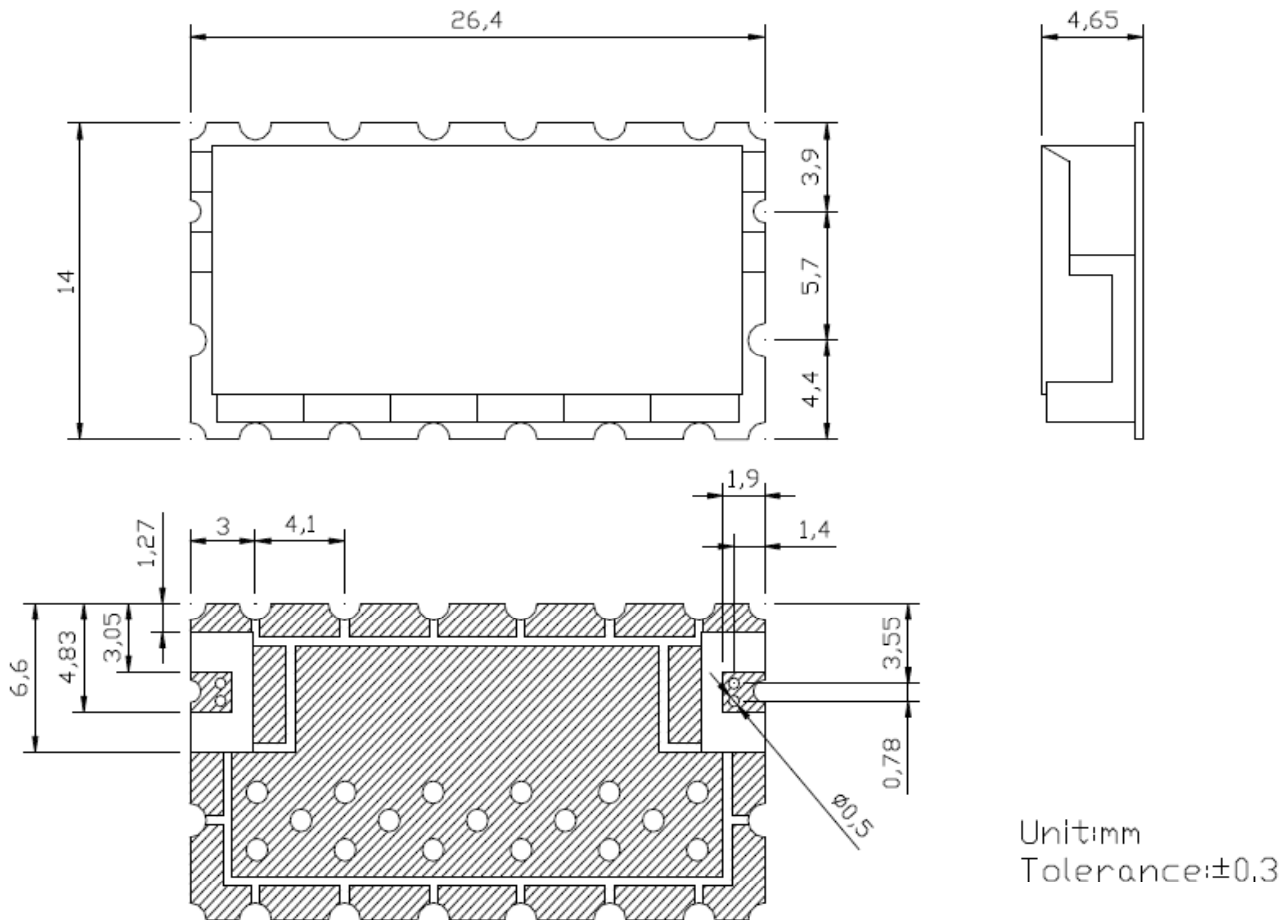

Unit:mm
Tolerance:±0,3