



**Electrical specifications**

**Center Frequency:** 737 MHz  
**Bandwidth:** 18 MHz  
**VSWR in BW:** 12 dB min.  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 728-746 MHz  
**Passband Insertion Loss:** 3.0 dB max.  
**Passband Ripple:** 0.5 dB max  
**Rejection:** 30dB min. @ 658-676 MHz  
**Rejection 2:** 30 dB min. @ 798-816 MHz  
**Rejection 3:** 30 dB min. @ 868-886 MHz  
**Power Handling:** 1 W

**Mechanical**




**Mounting Method:** SMT  
**Dimensions:** 13 x 12 x 6 mm max

**Environmental**

**Operating Temperature:** -20°C to +85°C  
**Storage Temperature:** -50°C to +90°C

**This product is RoHs compliant.**

**Outline Drawing:**

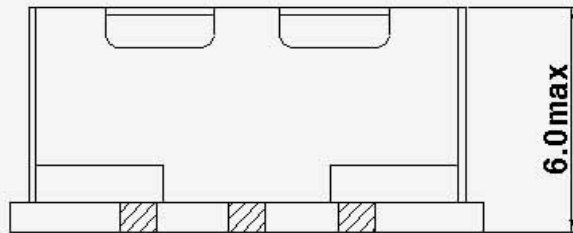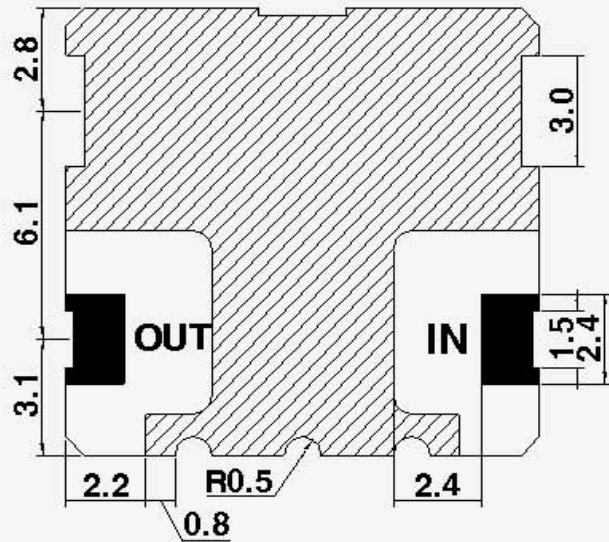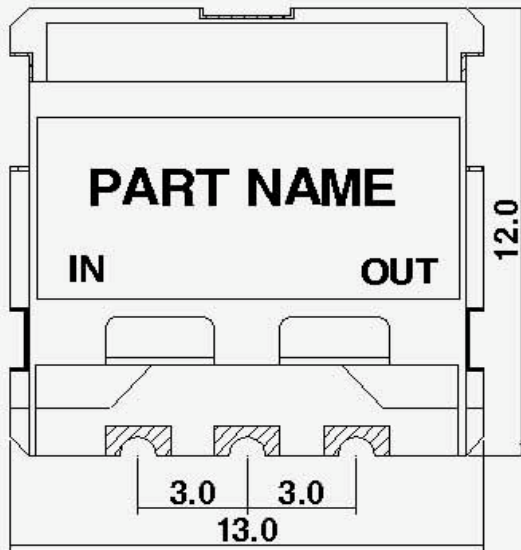

■ : I/O PORT

▨ : GROUND

**TOLERANCE UNLESS  
OTHERWISE SPECIFIED : ±0.2  
DIMENSIONS : mm**



### Response Plot:

