



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1110 MHz Ceramic Bandpass Filter

Part Number: AM1110B1341



Electrical specifications

Center Frequency: 1110 MHz

Bandwidth: 100 MHz

VSWR: 2.0 : 1

Input / Output Impedance: 50 Ohms

Passband: 1060-1160 MHz

Passband Insertion Loss: 2.0 dB max

Passband Ripple: 3.0 dB max

Rejection: 45 dB min at 900 MHz

Rejection 2: 20 dB min at 960 MHz

Rejection 3: 40 dB min at 1325 MHz

Power Handling: 1 W

Mechanical

Mounting Method: SMT

Dimensions: 13 x 12 x 4.5 mm


Environmental

Operating Temperature: -20°C to +70°C

Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

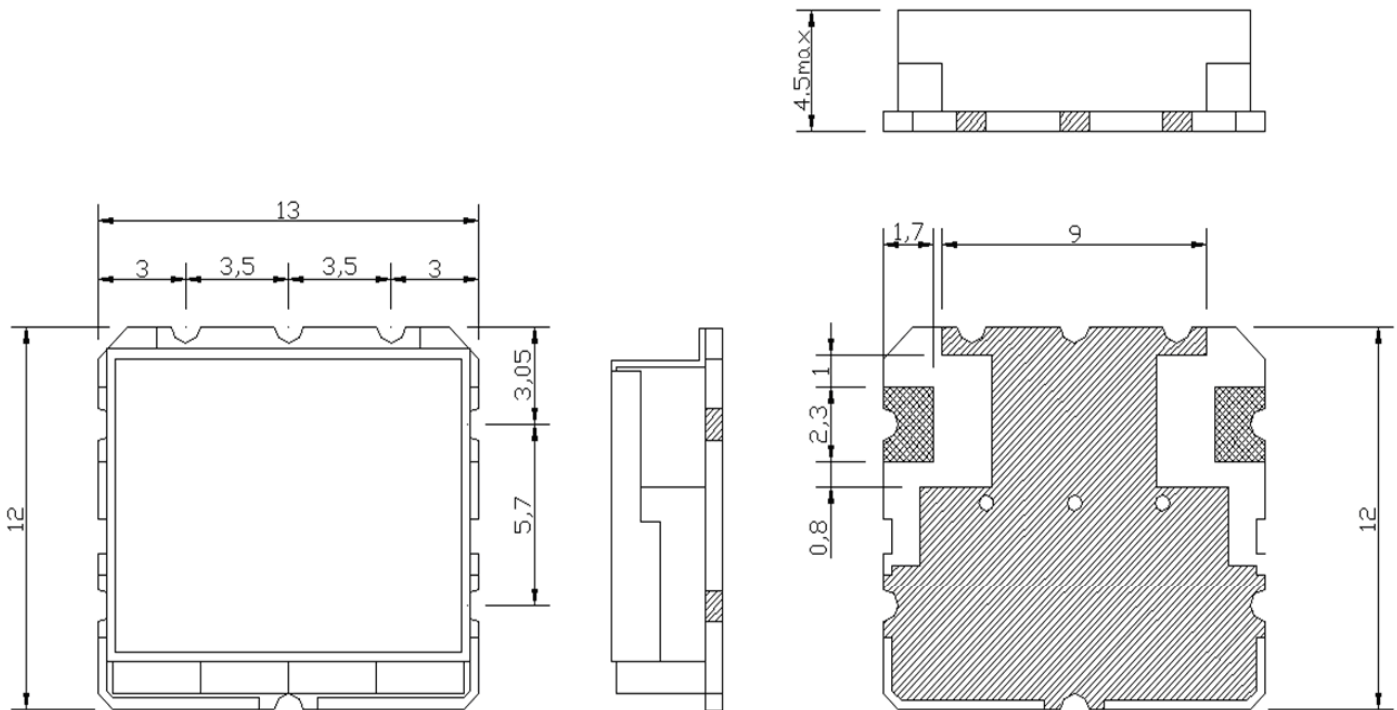

Unit:mm
Tolerance:±0.3