



IN THE CONSTANT PURPOSE OF IMPROVING ITS PRODUCTS, AMPHENOL SOCAPEX RESERVES THE RIGHT TO MODIFY ANY DIMENSION OR CHARACTERISTICS.  
FM.NPD.0036.THYEZ.PUNE rev C

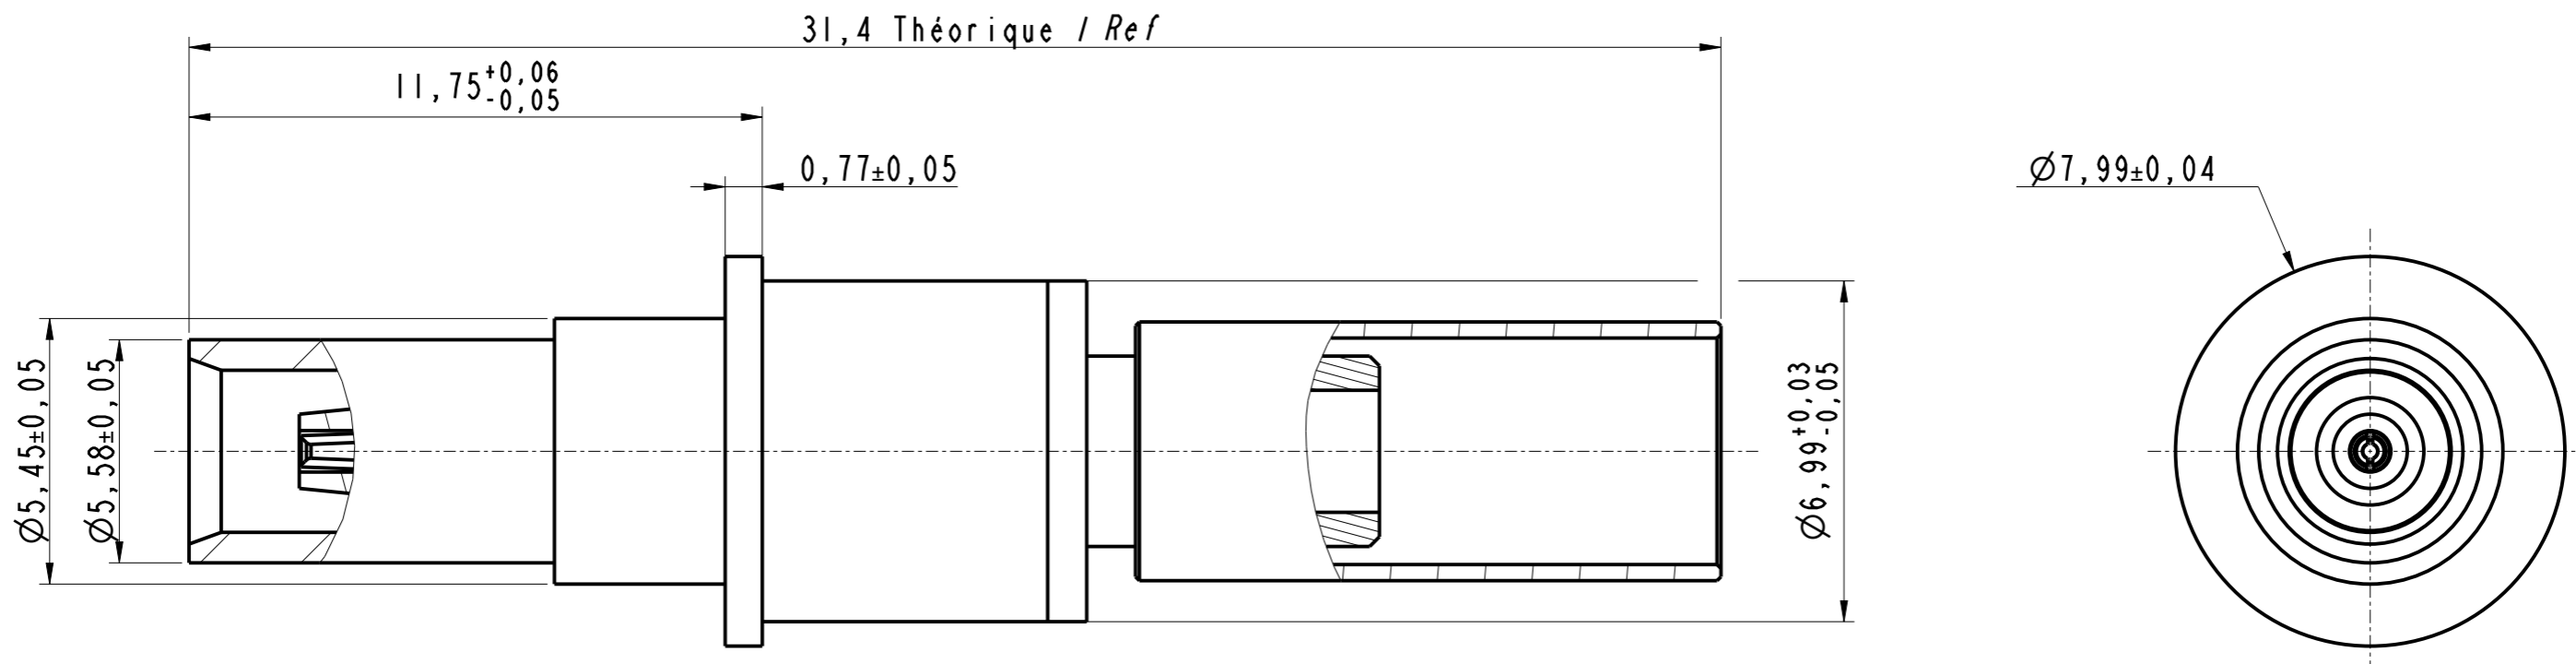

**Note**

- ① - Contact livré non assemblé  
*Contact delivered unassembled*
- ② - Cable compatible: V73263  
*Cable compatible: V73263*
- ③ - Outil de sertissage:  
Contact intérieur TBD  
Contact extérieur TBD  
- *Crimping tool:*  
Inner contact TBD  
Outer contact TBD
- ④ - *Matières:*  
- Contact extérieur: inox  
- Contact intérieur: alliage de cuivre  
- Fut de sertissage et ferrule: laiton  
- Isolants: PTFE ou équivalent  
*Material:*  
- Outer contact: Stainless steel  
- Inner contact: copper alloy  
- Crimping barrel and ferrule: brass  
- Inserts: PTFE or equivalent
- ⑤ - *Traitements:*  
- Contact extérieur: passivation  
- Contact intérieur, fut de sertissage et ferrule: dorure  
*Finish:*  
- Outer contact: passivation  
- Inner contact, crimping barrel and ferrule: Gold

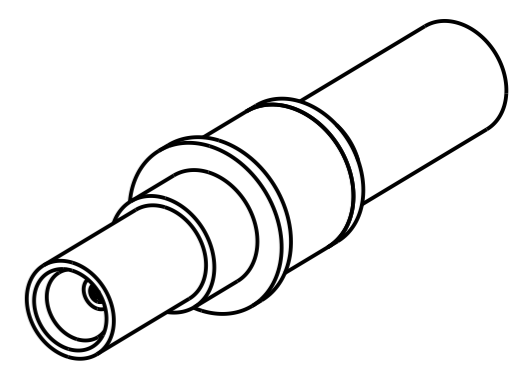

<b>Broche Coax T8 75 ohms 6G-SDI</b> <i>Pin coax S8 75 ohms 6G-SDI</i> Ref : 612470			
DRAWN BY : M.PRUD'HOM		UPDATED BY : M.LAINE	
		LAST APPROVED BY : L.LAGRANGE	
ALL DIMENSIONS ARE IN MM	<b>AMPHENOL SOCAPEX</b>		ORIGINAL DRAWING DATE : 24/02/21
	B.P. 29 74311 THYEZ CEDEX		CONFIGURATION DATA ARE AVAILABLE IN PDM
SCALE : 7			REV : B PAGE : 1/1
			<b>172-PLC-269-00</b>