


NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 VSWR (MAX): 1.12:1
- 1.3 MAXIMUM INPUT POWER: 2 WATTS AT +25°C DERATED LINEARLY TO 1 WATT AT +125°C.
- 1.4 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 MARKING (MARK UNIT AS SHOWN):

(REF: INK-02639-27-52)

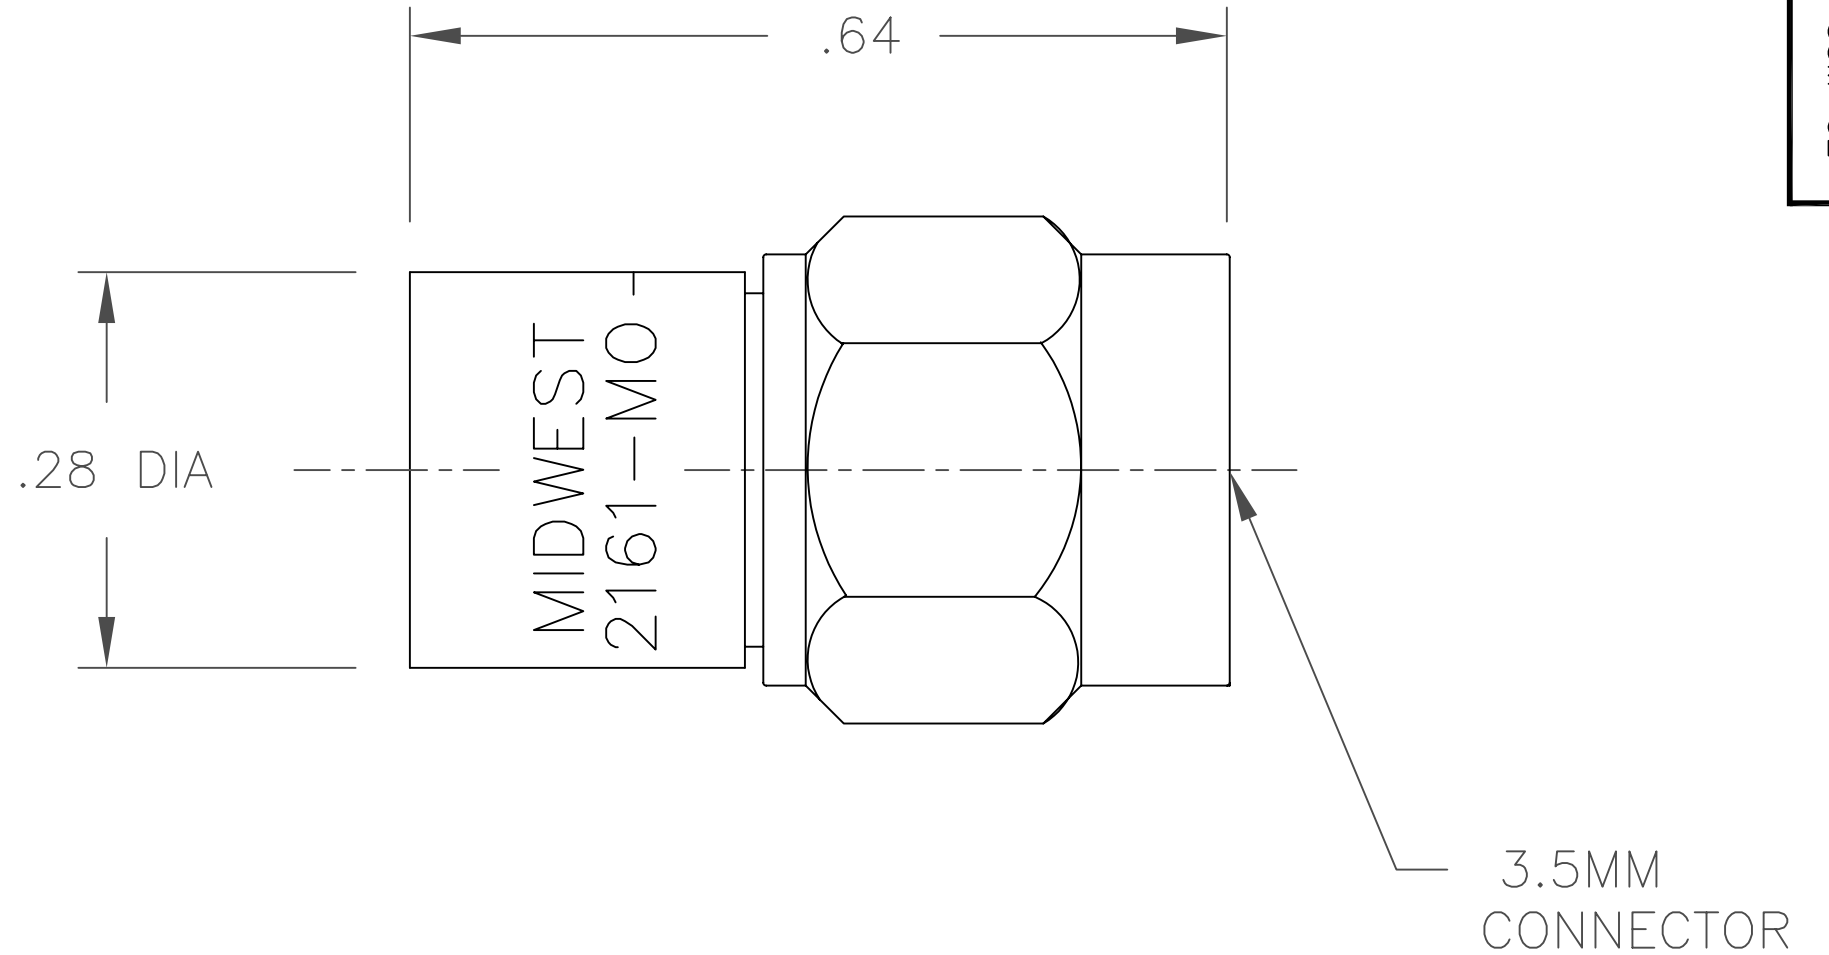

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.	CAGE CODE	34078 <i>MIDWEST MICROWAVE</i>	
	<p>EMERSON Network Power Connectivity Solutions</p>		TITLE TERMINATION-3.5MM PLUG OUTLINE DRAWING
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	DRAWN/DATE A.BEATTY 8/7/92	ENG./DATE G.KOZAK 8/7/92	DRAWING NUMBER TRM-2161-M0-35M-02-01
	CHECKED/DATE M.HOLLMAN 8/7/92	APPROVED/DATE	REV. D
SCALE: 5=1		SHEET 1 of 1	

REV.	DESCRIPTION	DATE
-	RELEASED	8/12/92
A	ECN 12390	2/1/93
A1	ADDED TITLEBLOCK	11/9/05
D	ECO 22680	9/30/10