




- Common Mode/Line Filter
- UU98 Through Hole Design
- Horizontal Mount
- Operating Temperature Range: -55°C to +105°C




Electrical Specifications @25°C				
Inductance N1 = N2	Test Frequency	DCR N1 = N2	Hi Pot VAC/5mA/3S	
			Wdg-Wdg	Wdg-Core
22mH Min	1KHz, 0.3V	2.3Ω Max	1000	500


All specifications subject to change without notice.

MECHANICAL

Dimensions: $\frac{\text{inch}}{\text{(mm)}}$

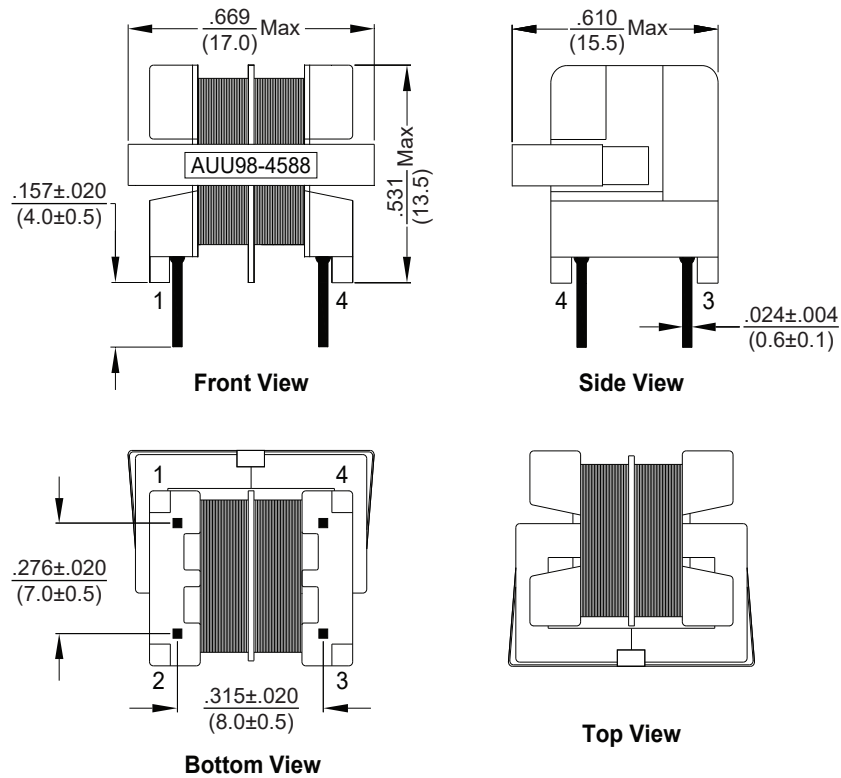

SCHEMATIC

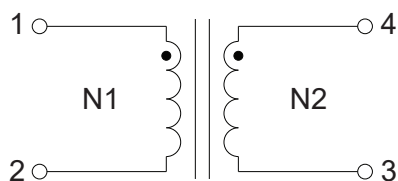

WINDING CONSTRUCTION

