



- Vertical Mount
- UU Core Design
- Operating Temperature Range: -55°C to +105°C




Electrical Specifications				
Inductance (L) @ 1KHz, 0.25V N1 = N2	DCR (mΩ) Max N1 = N2	I <sub>rms</sub> @ 1KHz, 0.25V (A) Max	HiPot 5mA / 2Sec	
			Wdg - Wdg	Wdg - Core
10mH Min	220	1.5	3750Vac	2000Vac


All specifications subject to change without notice.

**MECHANICAL**

Dimensions:  $\frac{\text{inch}}{\text{mm}}$

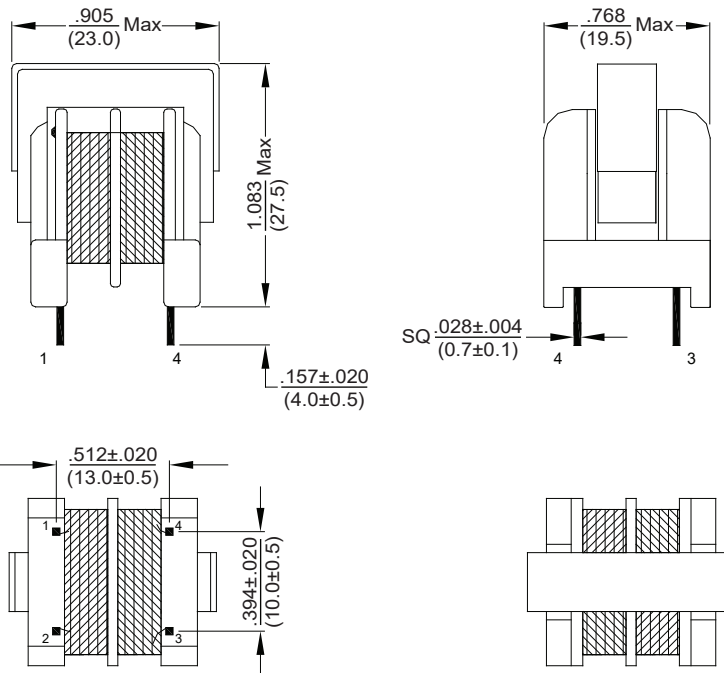

**SCHEMATIC**



**WINDING CONSTRUCTION**

