

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass, Tin Plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A Current rating: 15 A Voltage rating: 250 VAC Insulation resistance: 100 Mohm min. at
500 VDCDielectric withstanding voltage: 2000 VAC
for one minute

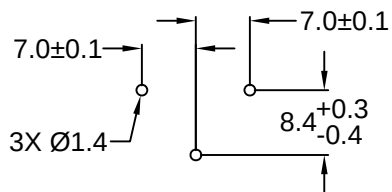
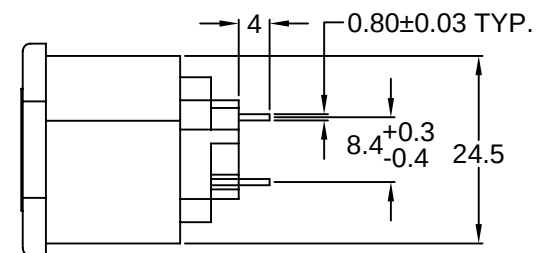
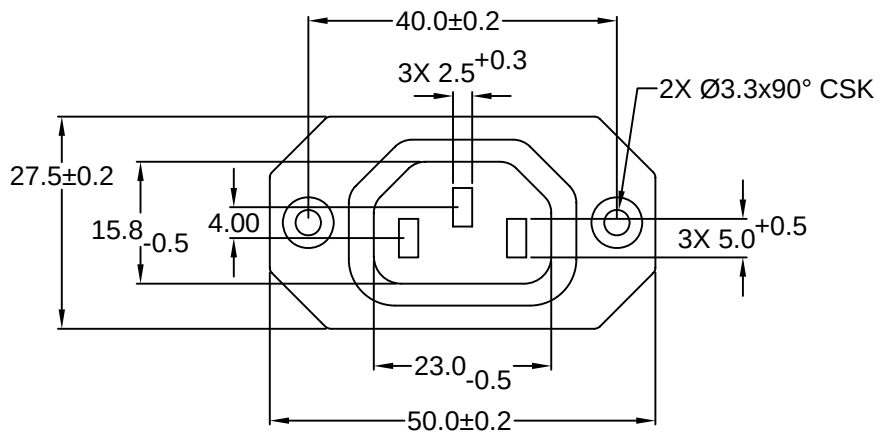
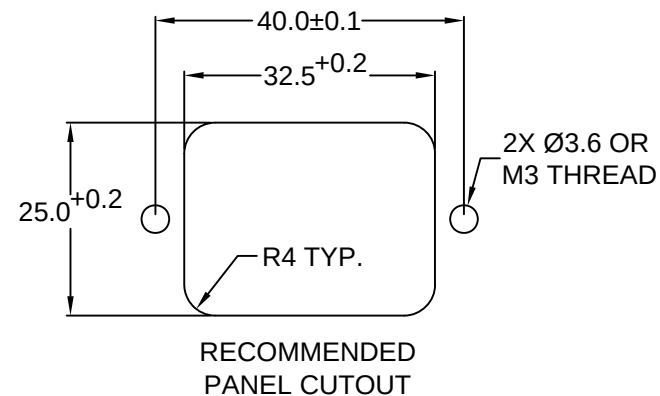
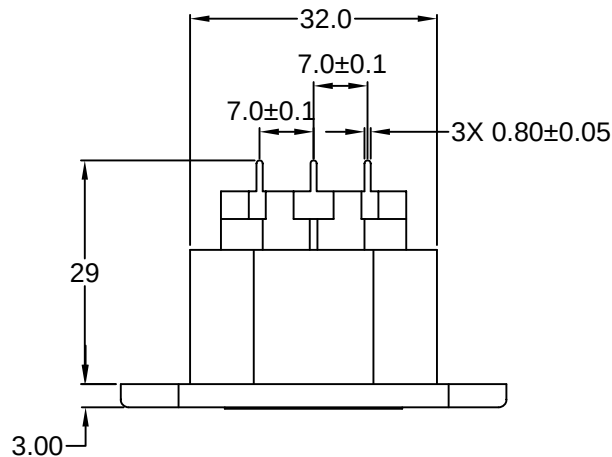
ORDERING CODE:

43R09-1 $\frac{3}{1}$ 2

1) COLOR

1 = BLACK

2 = GRAY

RECOMMENDED
PCB LAYOUTRoHS
COMPLIANTTOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; STRAIGHT
PC TERMINALS; SIDE FLANGE, PANEL MOUNT

DRAWN BY	GQ	DATE:	10/09/01
CHECK BY	TD	DATE:	10/11/01
APPR BY	PB	DATE:	10/11/01

PART #: 43R09-1X32

SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG CHECK APPR

6

5

4

3

2

1