

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: PC (Polycarbonate), color
black, UL-94V-0 rated

Contacts: Brass, Tin Plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A




Voltage rating: 250 VAC

Current rating: 15 A


Voltage rating: 250 VAC




RoHS
COMPLIANT

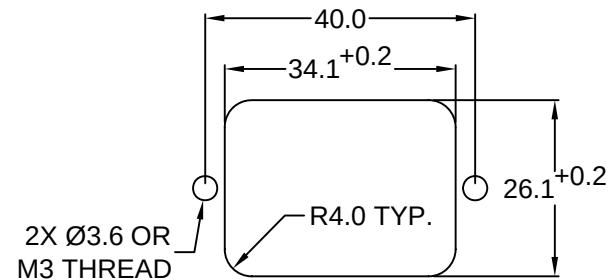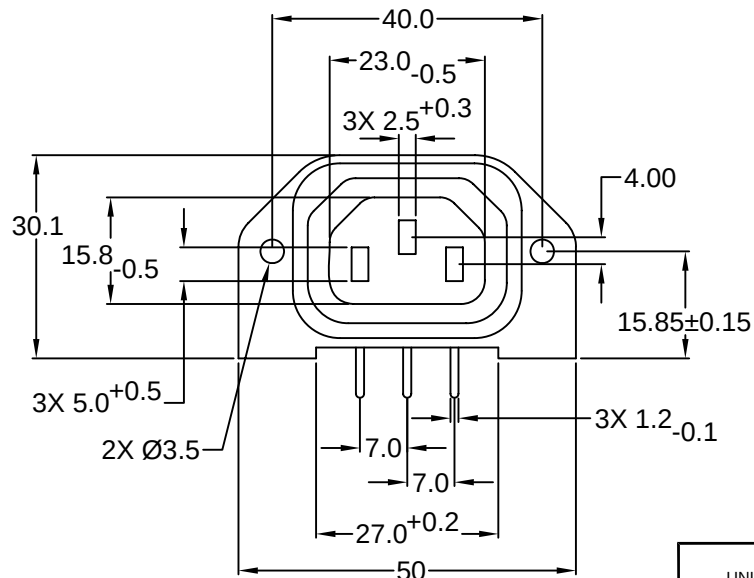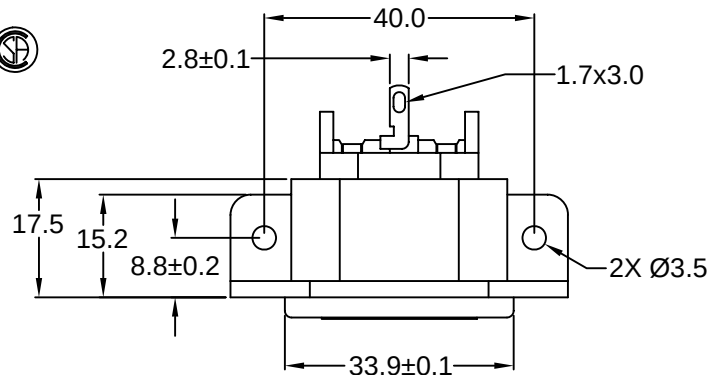

RECOMMENDED
PANEL CUTOUT

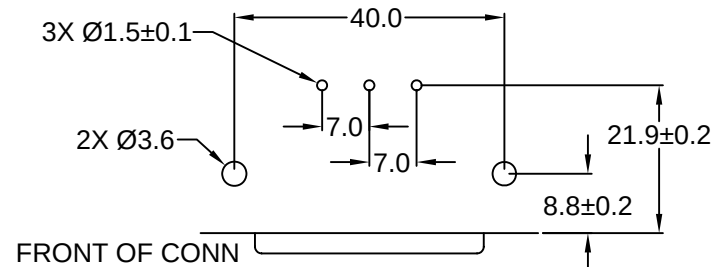

RECOMMENDED
PCB LAYOUT (TOP VIEW)

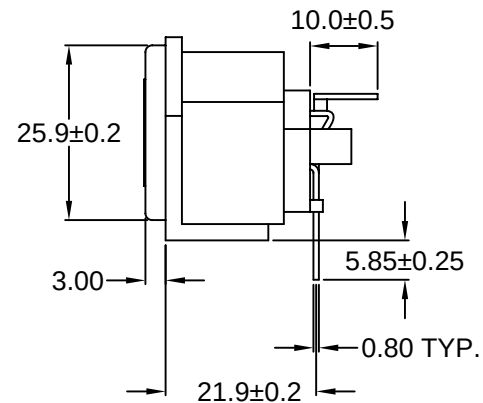

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	12/05/01	REVISED / UPDATED	GQ	TD	PB

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	AH	DATE:	3/25/98
CHECK BY		DATE:	
APPR BY	SS	DATE:	11/9/98

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C13 APPL. OUTLET; PCB
TERMINALS, SIDE FLANGE

PART #: **43R65**

SIZE: A
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV: A