

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Brass

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A

Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

43R03-1 $\frac{1}{2} \frac{3}{3}$

1) COLOR

1 = BLACK

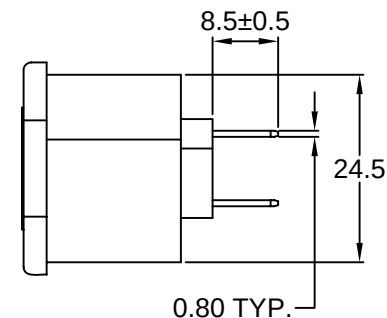
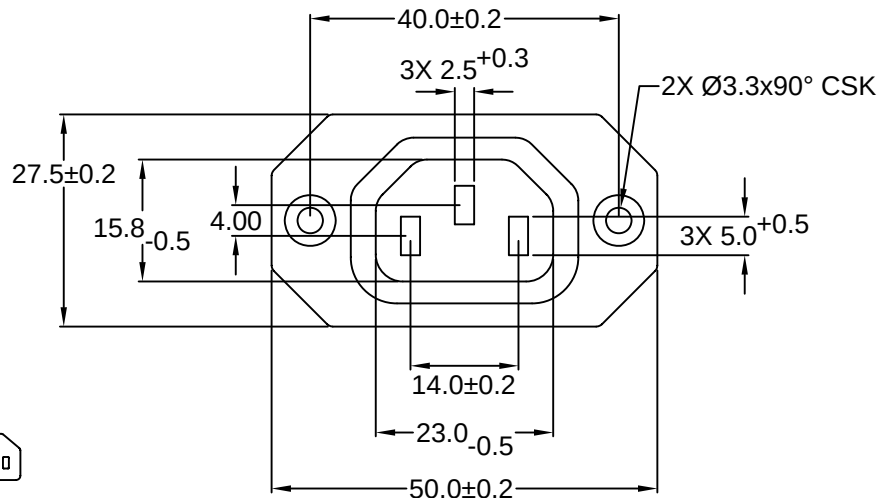
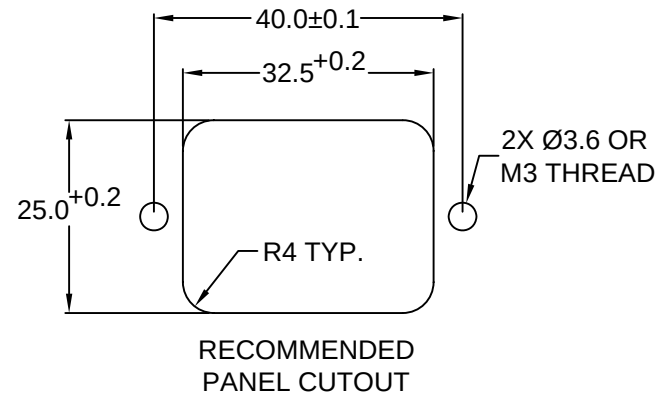
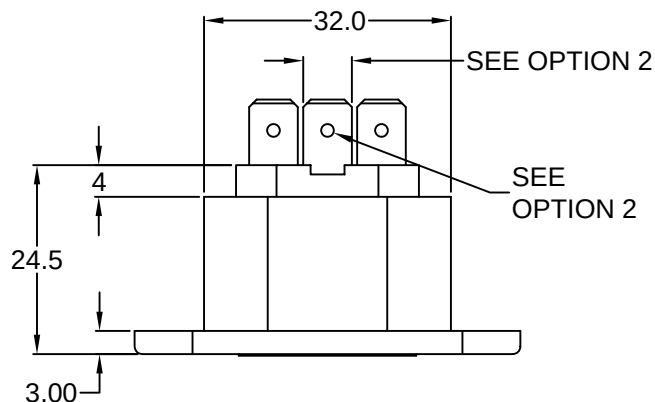
2 = GRAY

2) TERMINAL OPTIONS

1 = .187(4.8) WITH Ø1.4

2 = .250(6.3) WITH Ø1.65

3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C 15A 250V 70°C   2 = 10A 250V 120°C 
15A 250V 120°C   RoHS
COMPLIANTTOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; QC
TERMINALS; SIDE FLANGE, PANEL MOUNT

DRAWN BY	GQ	DATE:	10/05/01
CHECK BY	TD	DATE:	10/09/01
APPR BY	PB	DATE:	10/09/01

PART #: 43R03-1XXX

SHEET
1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG CHECK APPR

6

5

4

3

2

1