

MATERIAL AND FINISH

Insulator: Polycarbonate or Thermoplastic, black,
UL-94V-0 rated.

Solder Terminals: Brass, Tin plated.

ELECTRICAL SPECIFICATIONS:

Rated current: 10A

Rated voltage: 250VAC



Rated current: 15A

Rated voltage: 250VAC





No of Port	L	E	F
2	51.2	48.0	48.3
3	75.4	72.0	72.2
4	99.6	96.0	96.2
5	123.2	120.0	120.3
6	147.2	144.0	144.4
7	171.2	168.0	168.4

ORDERING CODE:


44R02-1 131 - 2

1) NO OF PORT (SEE CHART ABOVE)

2) PANEL THICKNESS

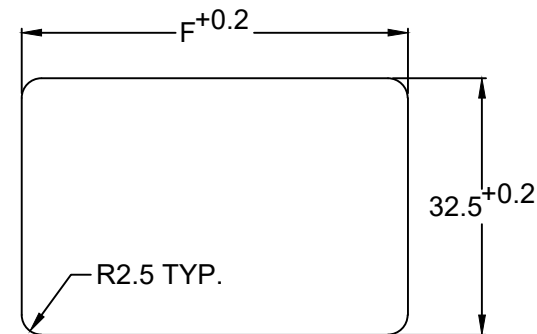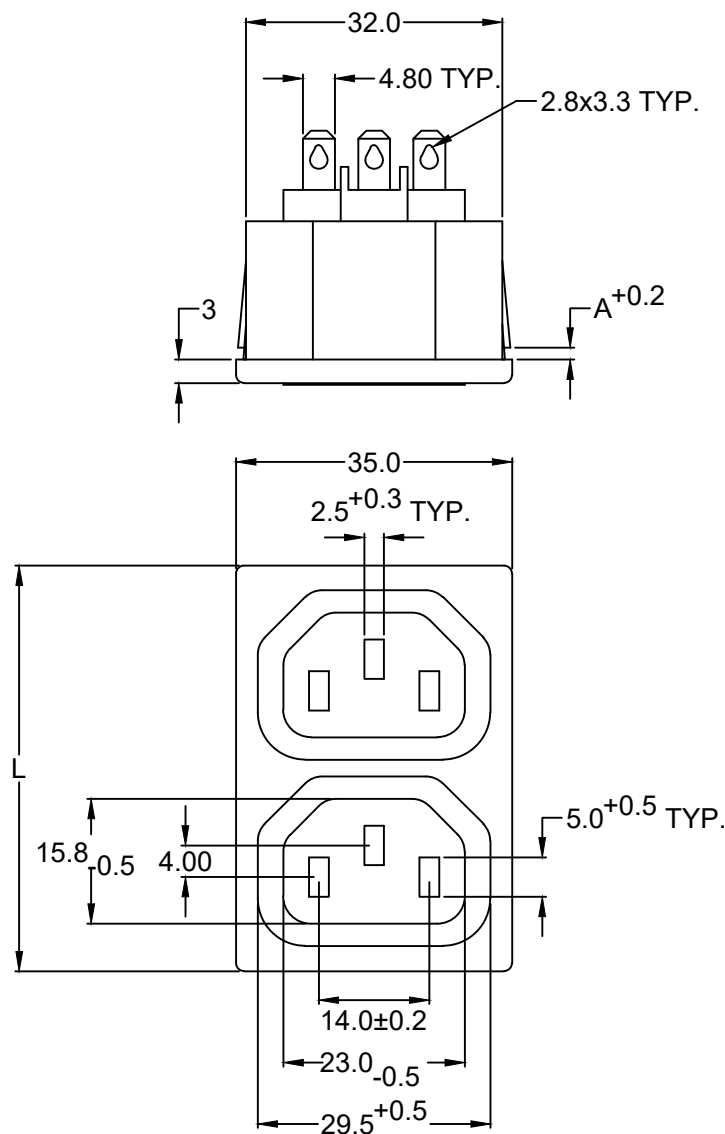

RECOMMENDED
PANEL CUTOUT

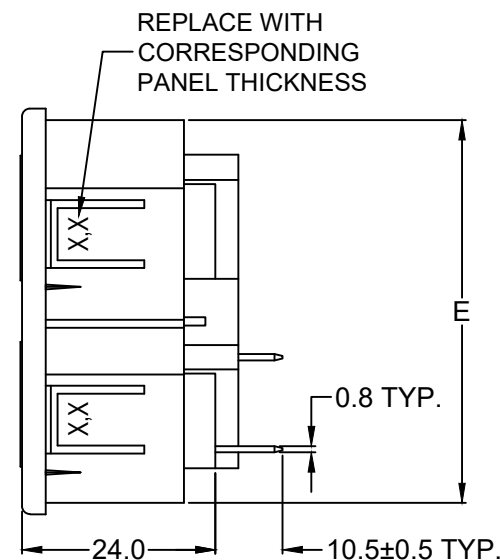

REPLACE WITH
CORRESPONDING
PANEL THICKNESS

RoHS
COMPLIANT

REV	REVISIONS					DATE	CHANGE	CHNG	CHK	APPR
	A	B	C	D	E					
A	2/28/03	5/14/04	1/24/05	1/30/08	6/22/21		CHNG. UL RATING TO 20A	PB	TD	PB
B							REV'D DIM L, E, F	PB	TD	PB
C							CHNG DIM E & F FOR 3 & 4 PORTS	PB	TD	PB
D							ADD 1.0mm PANEL THICKNESS	PB	TD	PB
E							6RU CURRENT RATING WAS 20A	PB	TD	PB

P/N	A	MAX. PANEL THICKNESS
44R02-X131-100	1.0	1.0
44R02-X131-150	1.5	1.5
44R02-X131-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY DT
CHECK BY PB
APPR BY
DATE: 1/15/03
DATE: 1/15/03
DATE:

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C13 STRIP APPL. OUTLET;
SNAP-IN, 4.8 Q.C. TERMINAL

PART #: 44R02-X131-XXX

SIZE: A
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1
REV: E