

MATERIAL AND FINISH:
Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:
Current rating: 10 A
Voltage rating: 250 VAC
Current rating: 15 A
Voltage rating: 250 VAC

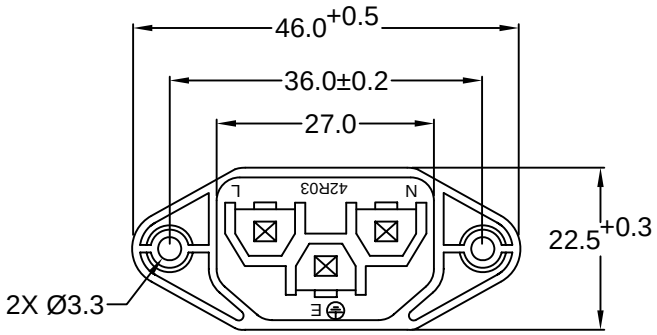

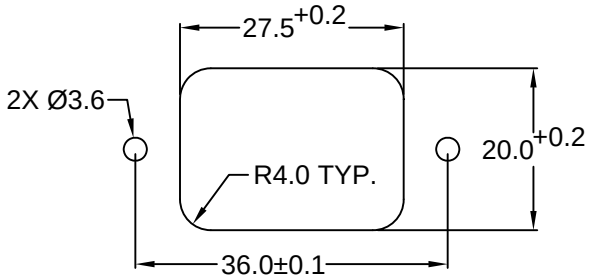

RECOMMENDED
PANEL CUTOUT

ORDERING CODE:
42R03-1 __ 2 __
1 2


1) COLOR
1 = BLACK
2 = GRAY


2) ELECTRICAL CIRCUIT
CONFIGURATION


1 = 15A 250V 120°C
2+GROUND

2 = 15A 250V 70°C
2+GROUND

4 = 15A 250V 70°C
2 POLE

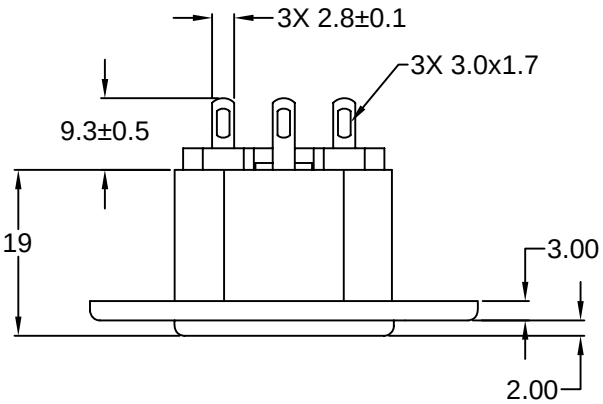



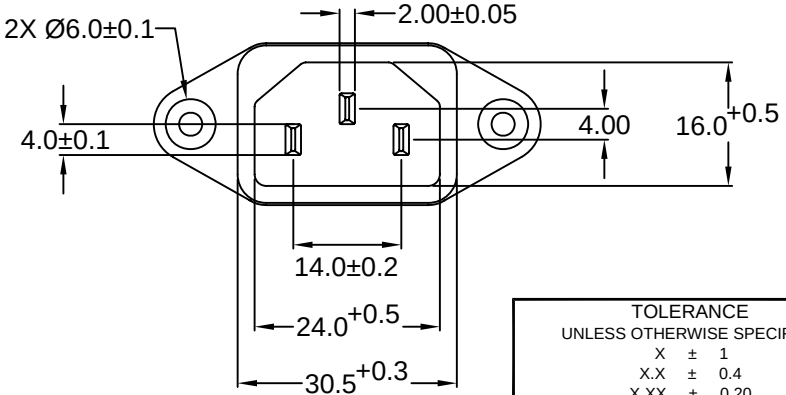

REVISIONS					
REV	DATE	CHANGE	CHNG	CHCK	APPR
A	7/20/04	REV'D 9.3 DIM LOCATION	TD	PB	

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

RoHS COMPLIANT

DRAWN BY	GQ	DATE: 08/16/01
CHECK BY	TD	DATE: 08/20/01
APPR BY	PB	DATE: 08/21/01

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; SOLDER TERMINALS; SIDE FLANGE, PANEL MOUNT

PART #: 42R03-1X2X

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A