
MATERIAL AND FINISH:
Insulator: Nylon 66, black, UL-94V-1 rated
Contacts: Brass, Tin plated


ELECTRICAL SPECIFICATIONS:
Current rating: 10 A
Voltage rating: 250 VAC
Current rating: 15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

Operating Temperature: 70°C


RoHS COMPLIANT


NOTES:
Recommended panel thickness
0.8mm max. to 3.0mm max.

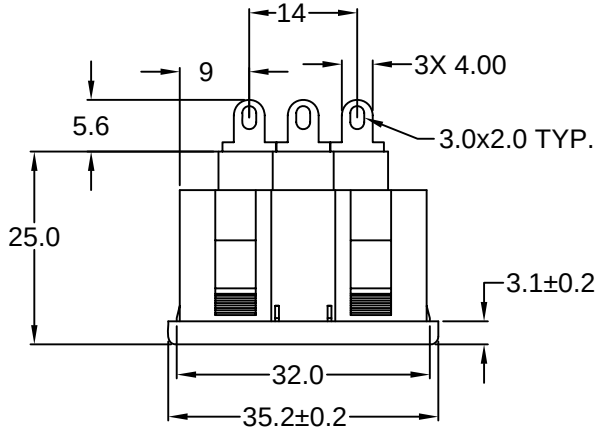

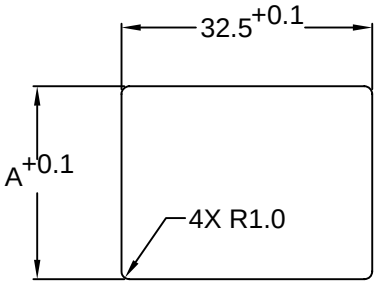

RECOMMENDED PANEL CUTOUT

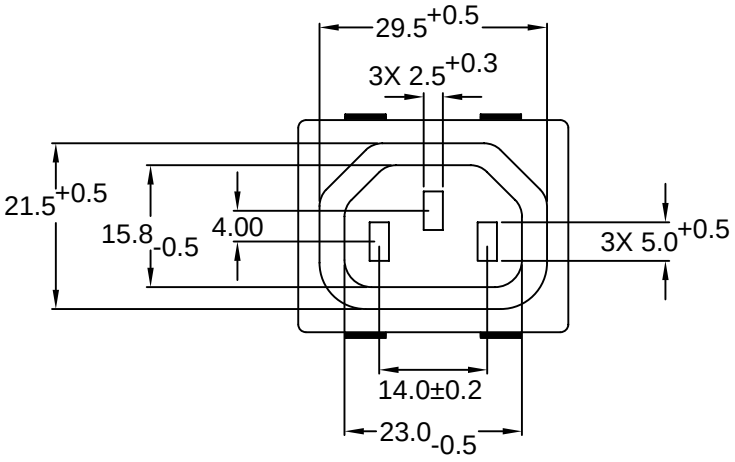

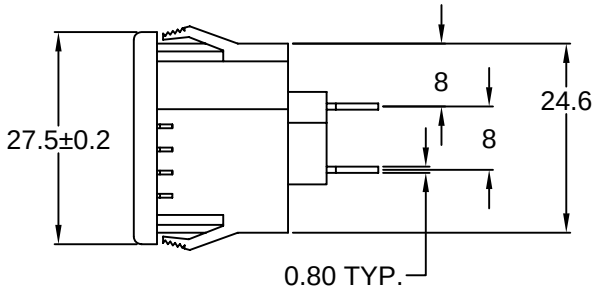

REVISIONS					
REV	DATE	CHANGE	CHNG	CHCK	APPR
A	10/23/01	REVISED / REDRAWN	GQ	TD	PB
B	11/24/04	ADD 14.0, 9.0, 8.3, 8.2 DIM	TD	PB	
C	12/2/04	CHG REF DIM TO DIM	TD	PB	

PANEL THICKNESS	A
0.8 - 1.0	25.4
1.0 - 1.2	25.5
1.2 - 1.5	25.6
2.0	25.7
3.0	25.7

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	BP	DATE:	3/8/00
CHECK BY	TD	DATE:	10/24/01
APPR BY	PB	DATE:	10/25/01

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: UVIVERSAL IEC 60320 C13 APPL. OUTLET; SOLDER TERMINALS, SNAP-IN

PART #: PD-43R04-11

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: C