

MATERIAL AND FINISH

Insulator: Nylon 66, UL-94V-0 rated

Contacts: Brass, Nickel plated


ELECTRICAL SPECIFICATIONS:

Current rating: 16A  20A 


Voltage rating: 250 VAC

Insulation resistance: 100 Mohm min. @ 500VDC




Dielectric withstanding voltage: 2000VAC for one minute.




REPLACE WITH
CORRESPONDING
PANEL THICKNESS

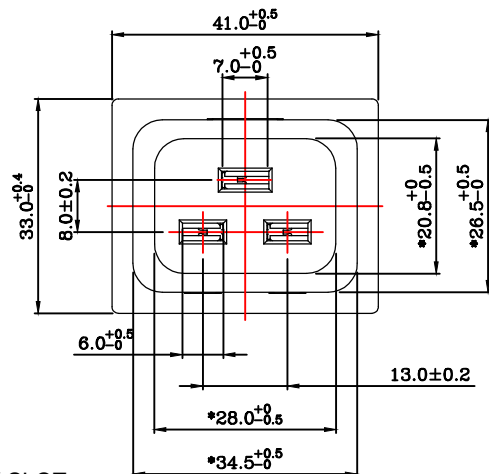

V-LOCK SLOT

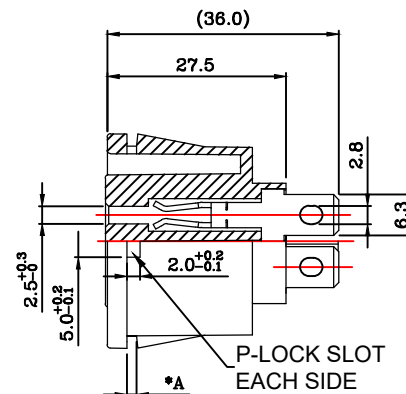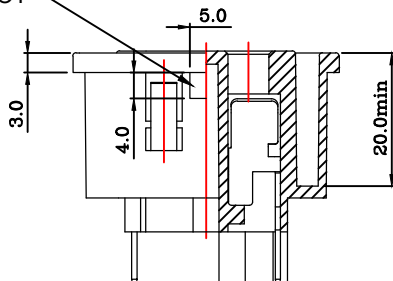




PANEL CUT-OUT

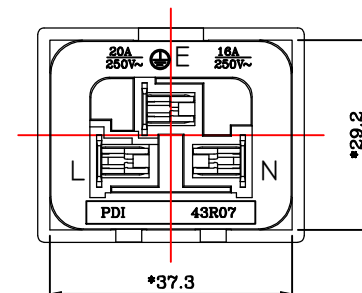

P/N	A	MAX. PANEL THICKNESS
43R07-31X1-120-PVL	1.2	1.2
43R07-31X1-150-PVL	1.5	1.5
43R07-31X1-170-PVL	1.7	1.7
43R07-31X1-200-PVL	2.0	2.0
43R07-31X1-250-PVL	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

43R07-3111-XXX-PVL 43R07-3121-XXX-PVL 43R07-3131-XXX-PVL



TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	PB	DATE:	6/1/22
CHECK BY		DATE:	
APPR BY		DATE:	

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 16/20A IEC 60320 APPL. OUTLET; QC TERMINALS

PANEL MOUNT; SNAP-IN; P-LOCK & V-LOCK COMPATIBLE

PART #: **43R07-31X1-XXX-PVL** SHEET 1 of 1

SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV:
SCALE: NTS		

REVISIONS

CHNG/CHK/APP

CHANGE

REV DATE