

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated.

Pin contact: Brass, Nickel plated.

Solder Terminals: Brass, tin plated.

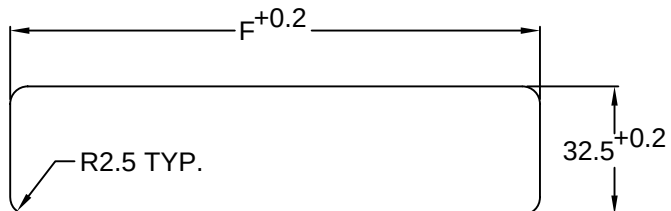
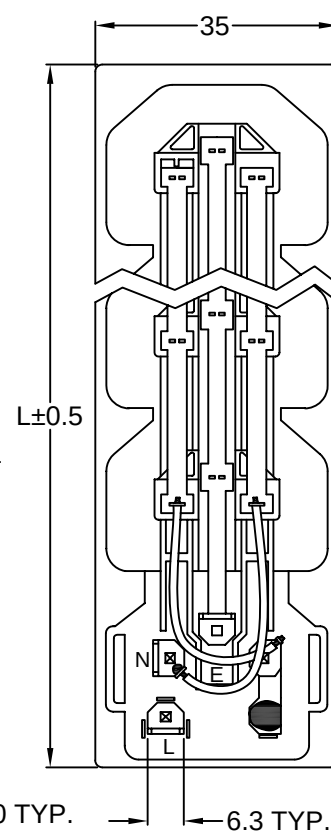
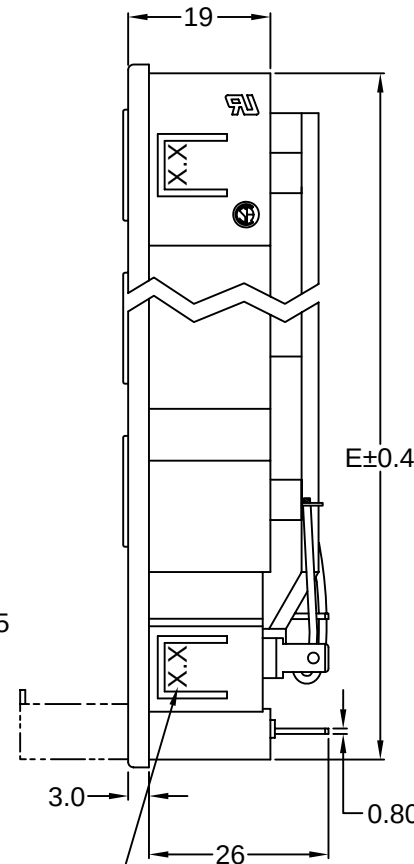
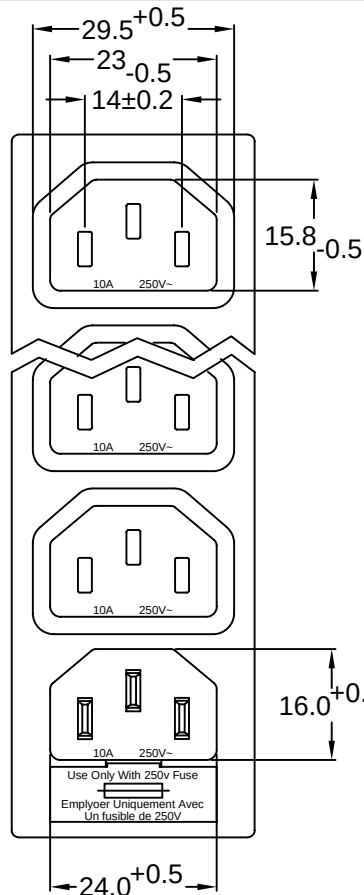
ELECTRICAL SPECIFICATIONS:

Rated current: 10A

Rated voltage: 250VDC



No of Port	L±0.5	E±0.4	F±0.2
1	58.5	55.4	55.9
2	82.1	79.0	79.5
3	105.7	102.6	103.1
4	129.3	126.2	126.7
5	152.9	149.8	150.3
6	176.5	173.4	173.9

RECOMMENDED
PANEL CUTOUTREPLACE WITH
CORRESPONDING
PANEL THICKNESS

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	10/1/01	REVISED TOL & DIM F	TD		PB
B	12/16/05	REV. TERM. LENGTHS; ADD DIM	PB		

P/N	A	MAX. PANEL THICKNESS
44R01-X131-150	1.5	1.5
44R01-X131-250	2.5	2.5
ADDITIONAL PANEL THICKNESS & .187 [4.8] QC AVAILABLE ON REQUEST		

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	DT	DATE:	10/02/01
CHECK BY	PB	DATE:	10/3/01
APPR BY	PB	DATE:	10/3/01

RoHS
COMPLIANT**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 STRIP APPL. INLET & OUTLET
SNAP IN, QC TERM., 5x20mm FUSE HOLDER

PART #: 44R01-X131-XXX

SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: B