


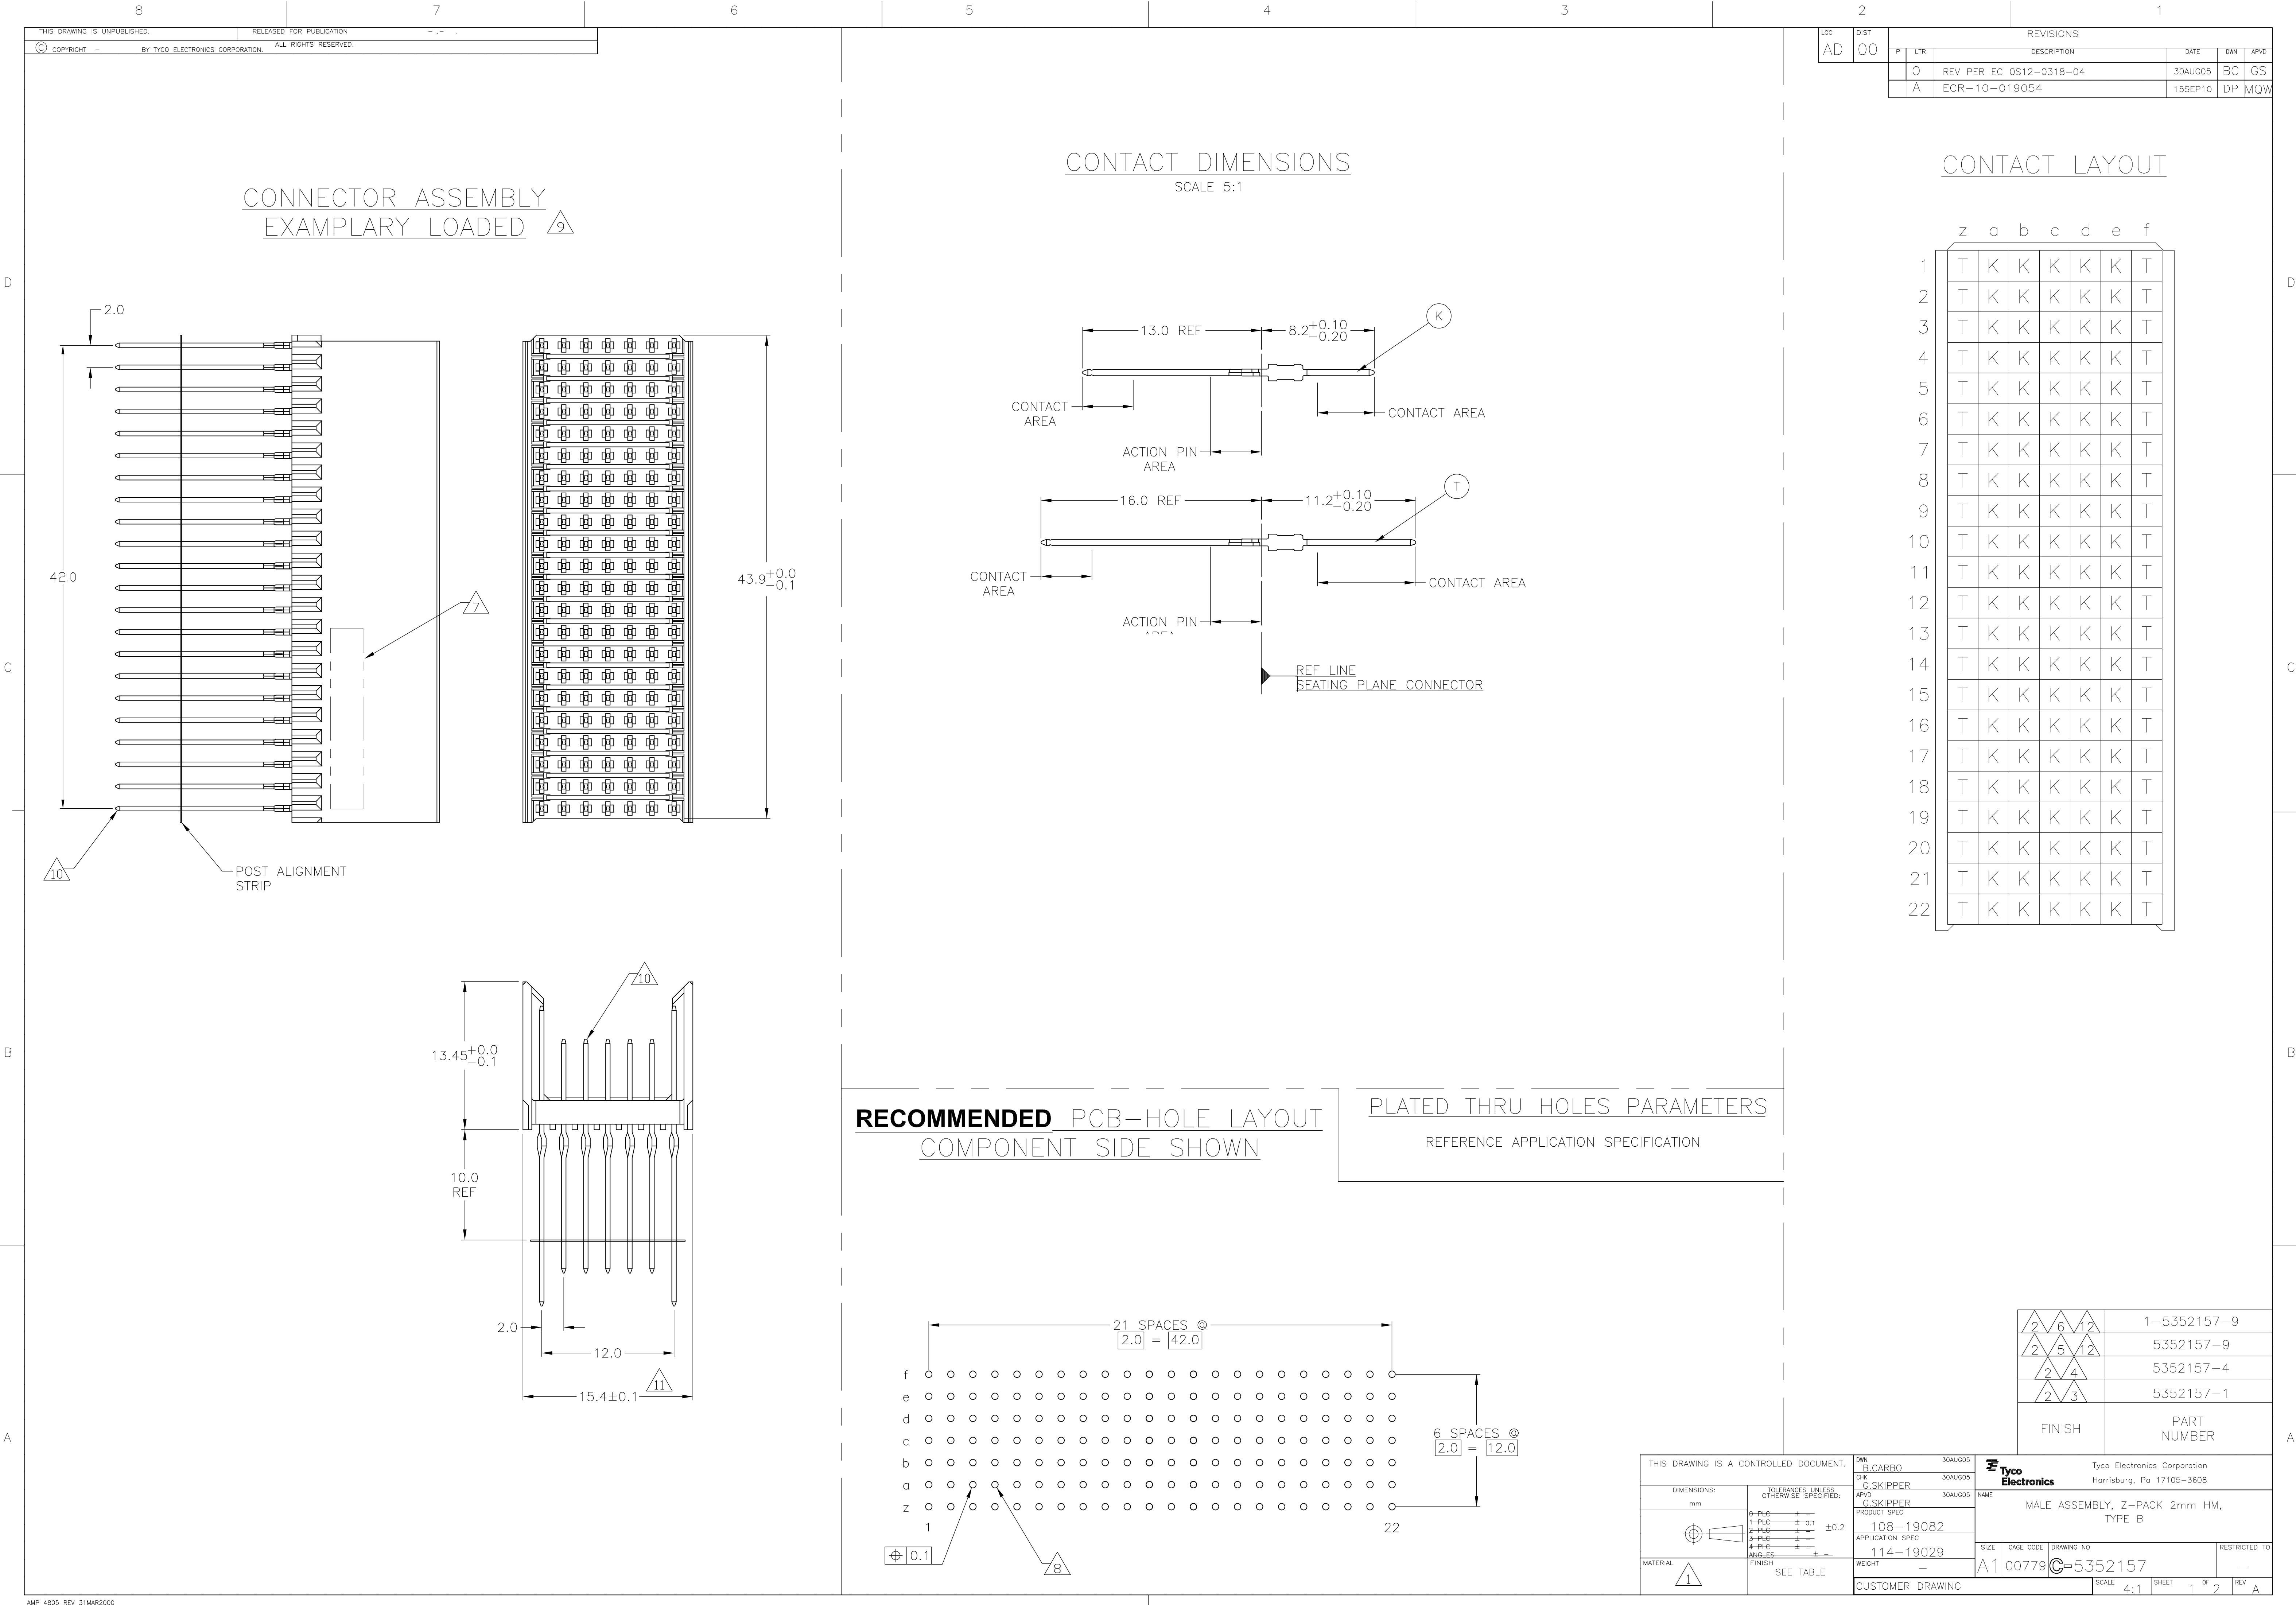

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

AD

00

REV

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.

2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27μm MIN NICKEL AND ACTION
PIN: 0.5μm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.

5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.

6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.

7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.

8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.

9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".

10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".

11

TO BE MEASURED AT BOTTOM OF SHROUD.

12

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DNV

B CARBO

30AUG05

CHK

G.SKIPPER

30AUG05

APVD

G.SKIPPER

30AUG05

NAME

MALE ASSEMBLY, Z-PACK 2mm HM,
TYPE B

PRODUCT SPEC

108-19082

APPLICATION SPEC

114-19029

SIZE

A1

CAGE CODE

00779

DRAWING NO

5352157

RESTRICTED TO

-

CUSTOMER DRAWING

SCALE

4:1

SHEET

2

OF

2

REV

A

AMP 4805 REV 31MAR2000

29JUN05 9:31am us040973 H:\2mm HM templates for lead free\LEAD FREE B FEED THROUGH 22 COLUMN 5+2-c.dwg