


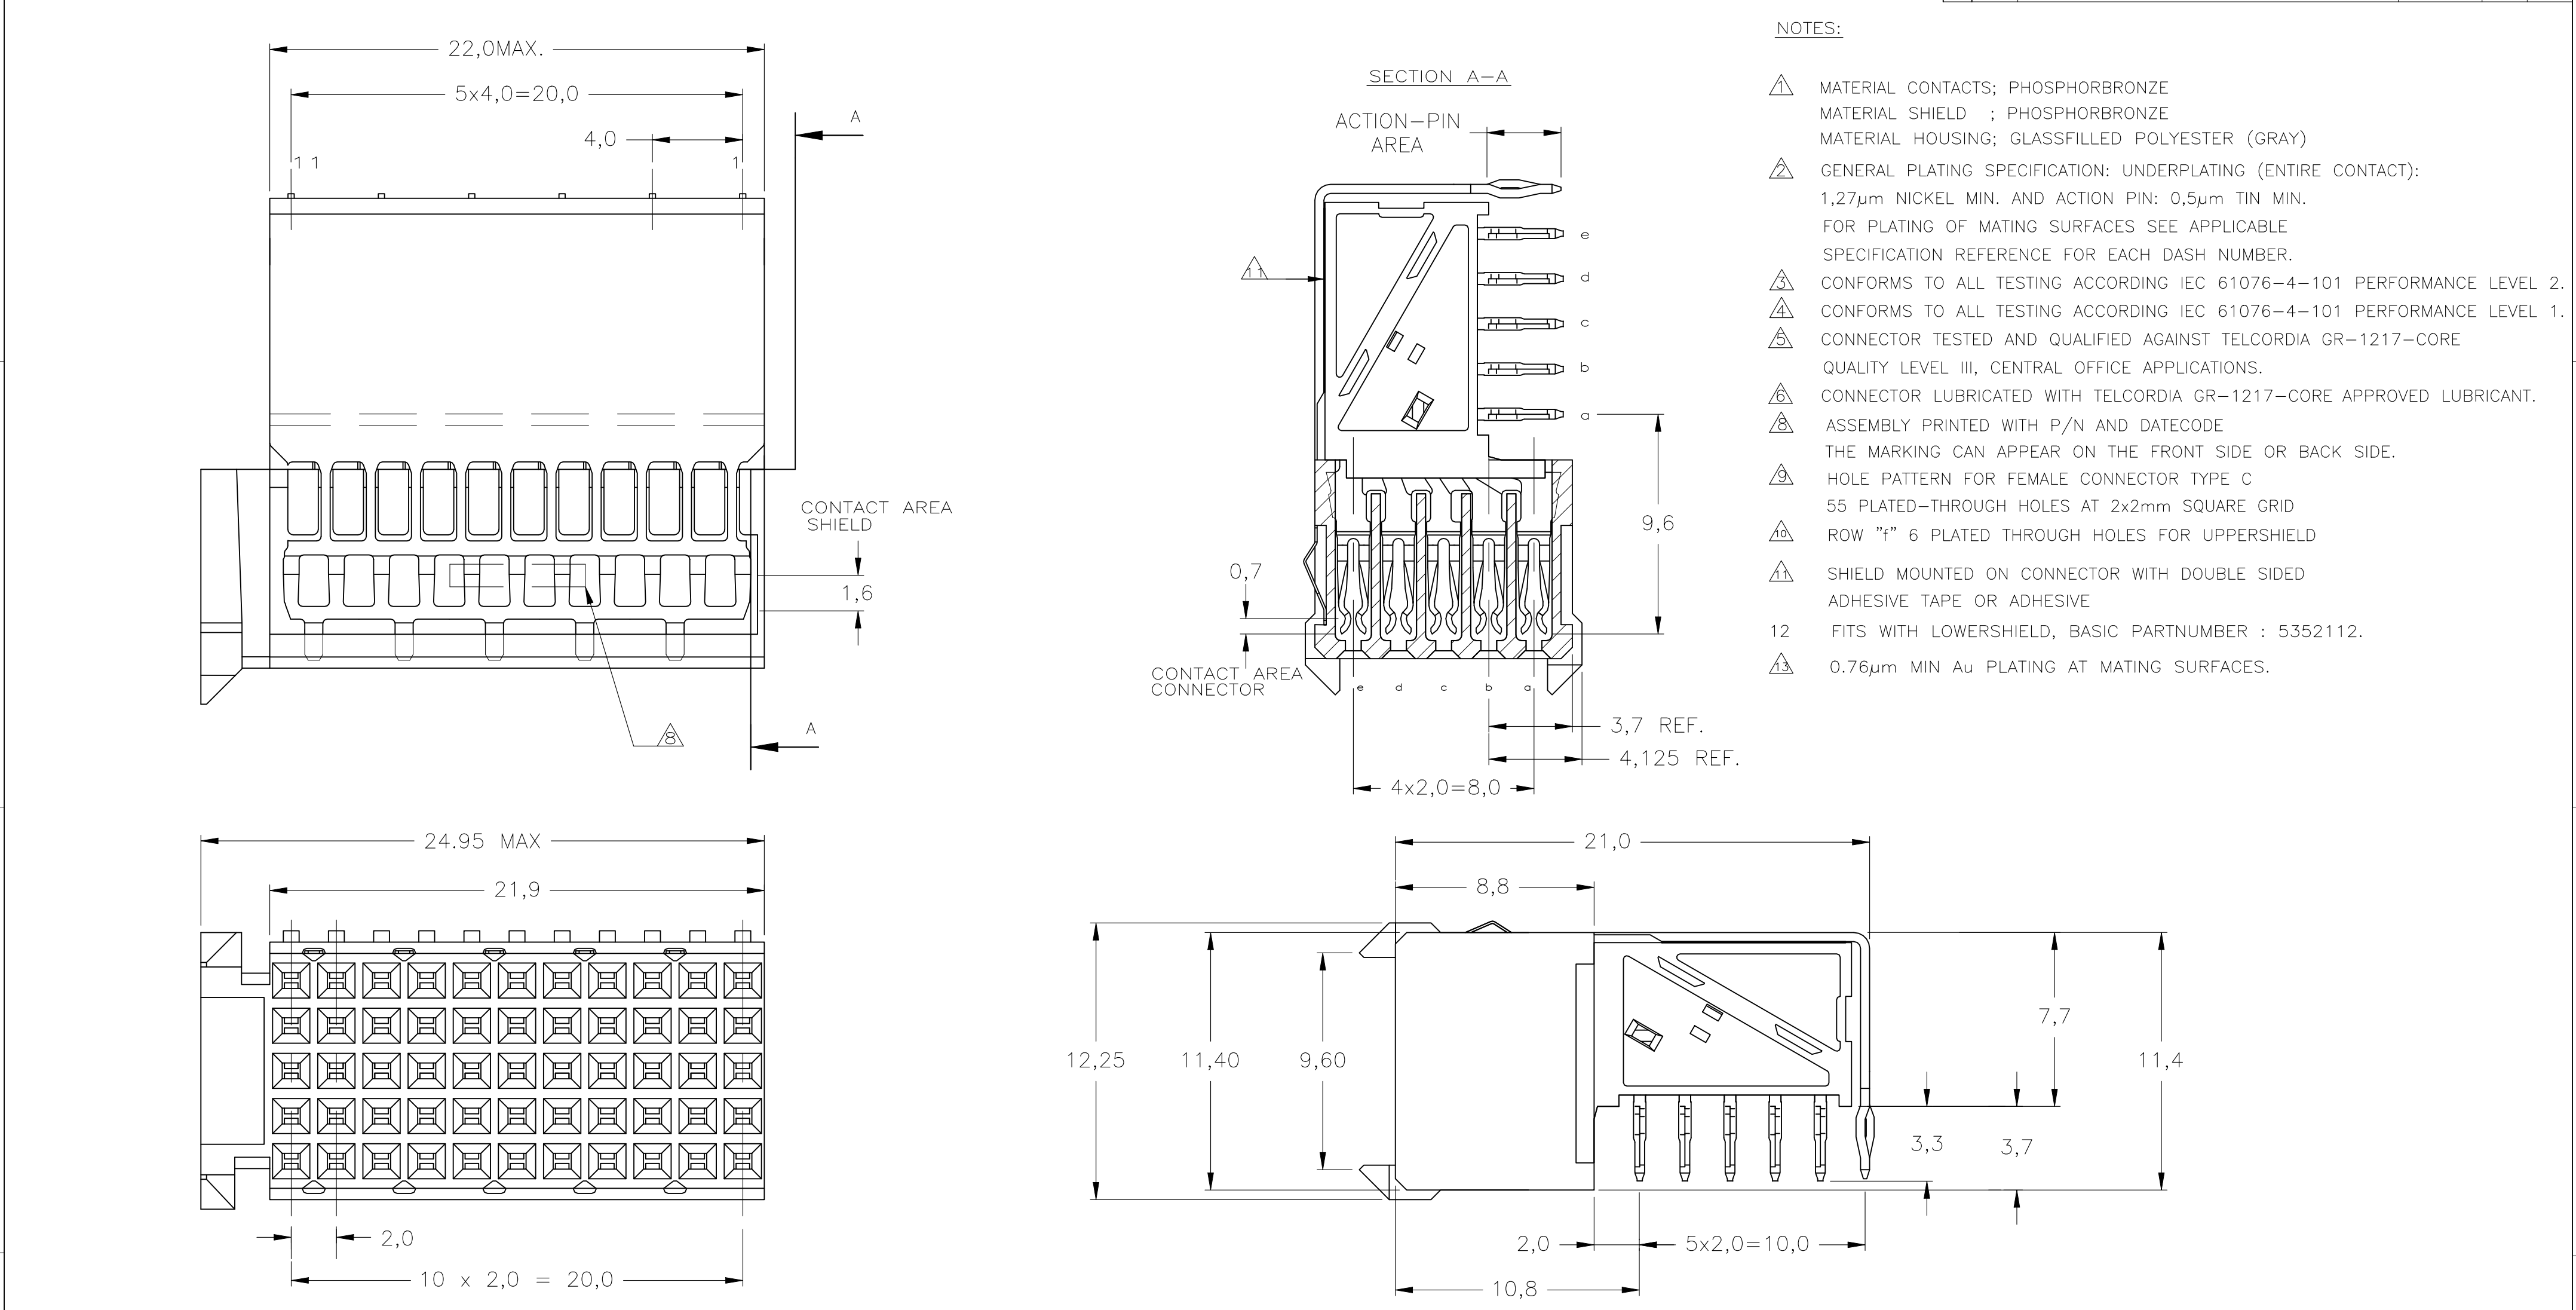

- NOTES:
- MATERIAL CONTACTS; PHOSPHORBRONZE
 - MATERIAL SHIELD ; PHOSPHORBRONZE
 - MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - ASSEMBLY PRINTED WITH P/N AND DATECODE
 - THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - HOLE PATTERN FOR FEMALE CONNECTOR TYPE C
 - 55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ROW "f" 6 PLATED THROUGH HOLES FOR UPERSHIELD
 - SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
 - FITS WITH LOWERSHIELD, BASIC PARTNUMBER : 5352112.
 - 0.76µm MIN Au PLATING AT MATING SURFACES.

COMPONENT SIDE AS SHOWN

RECOMMENDED PCB-HOLE LAY-OUT

SCALE 2,5:1

5x 4,0 = 20,0

1 1

10x 2,0 = 20,0

1,5

EDGE OF P.C.BOARD

ALL HOLES

2,0

4x 2,0 = 8,0

0,05

0-PLC ±

1-PLC ±

2-PLC ±

3-PLC ±

4-PLC ±

ANGLES ±

FINISH

±0.2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

MATERIAL

DWN K.N.KIRAN 19AUG2004

CHK B.MOOLJ 24SEP2004

APVD B.MOOLJ 24SEP2004

PRODUCT SPEC

APPLICATION SPEC

108-19082

114-19029

WEIGHT 0.000000

CUSTOMER DRAWING

OBSOLETE				3-5352115-0
OBSOLETE				5352115-9
OBSOLETE				5352115-4
				5352115-1
FINISH		MATERIAL		PARTNUMBER

TE Connectivity Ltd.

Z-PACK 2mm HM

TYPE C - 11 COLUMNS

PRE-SHIELDED RECEPTACLE

SIZE A2

CAGE CODE 00779

DRAWING NO C=5352115

RESTRICTED TO

SCALE 5:1

SHEET 1 of 1

REV J