
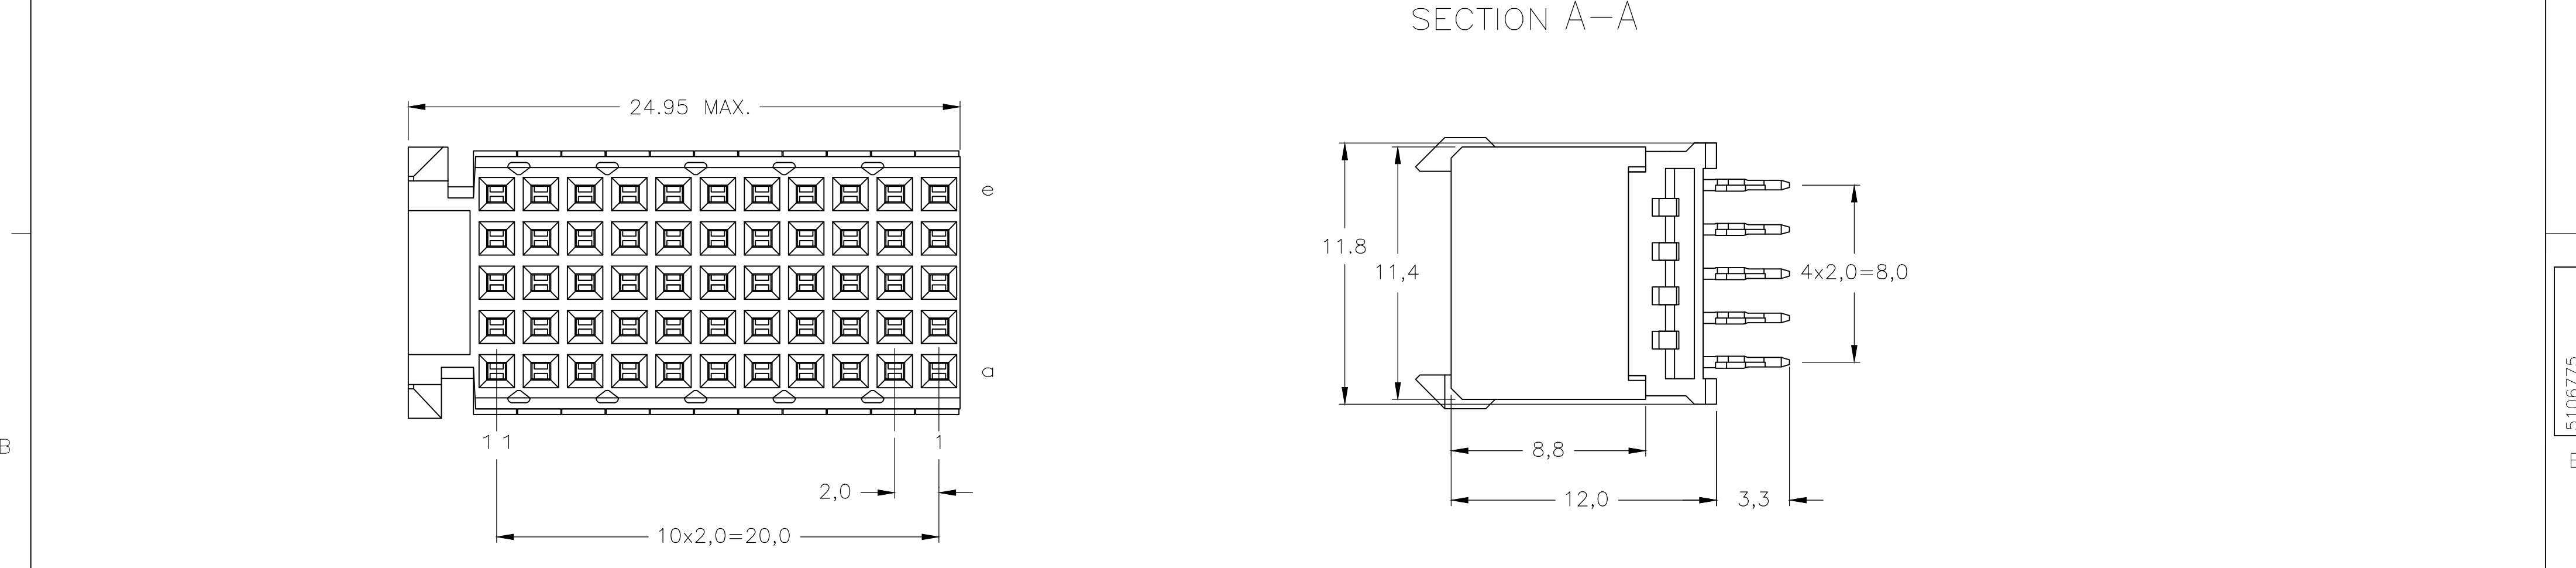


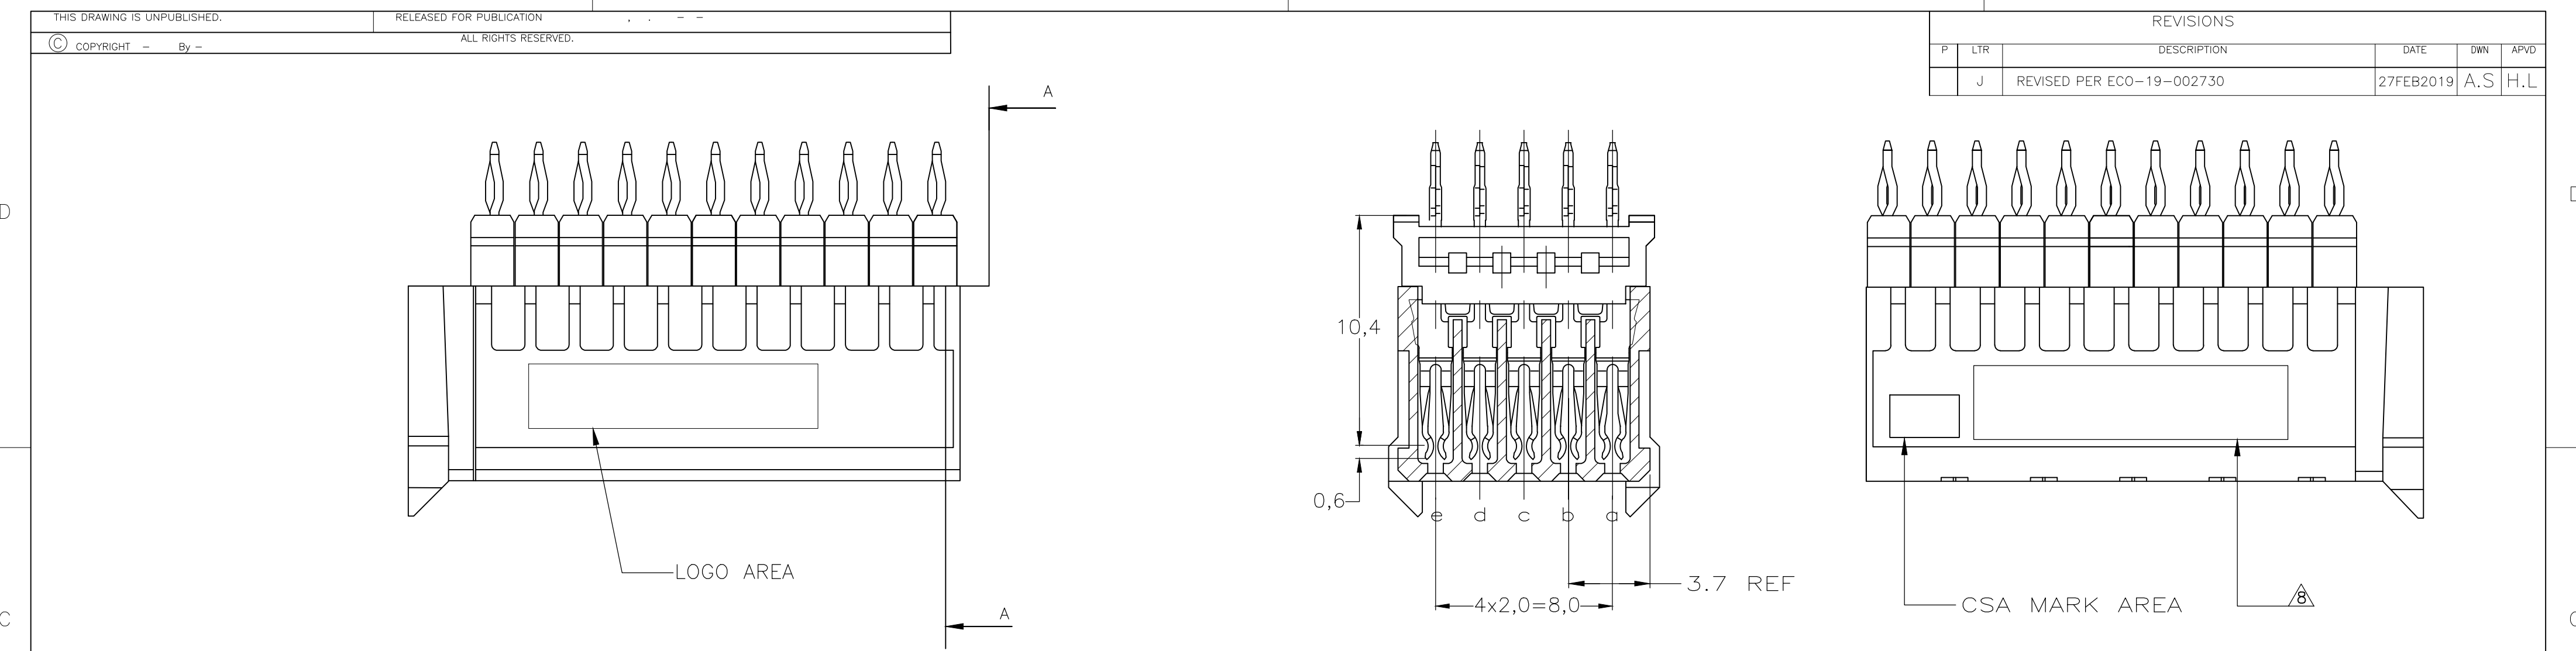

NOTES:

⚠ MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).

⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.

⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.

⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.

⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.

⚠ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.

⚠ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.

⚠ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (55 HOLES).
HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)

⚠ 0.76µm MIN. GOLD PLATING AT MATING SURFACE

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

SCALE 2,5:1

10x [2,0] = [20,0]

4,0

6x [2,0] = [12,0]

0,05
ALL HOLES

OBSOLETE	⚠	⚠	⚠	⚠	3-5106775-0
OBSOLETE	⚠	⚠	⚠	⚠	1-5106775-9
OBSOLETE	⚠	⚠	⚠	⚠	5106775-9
OBSOLETE	⚠	⚠	⚠	⚠	5106775-4
	⚠	⚠	⚠	⚠	5106775-1
	FINISH		MATERIAL		PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0-PLC ±
	1-PLC ±
	2-PLC ±
	3-PLC ±
	4-PLC ±
	ANGLES ±
	FINISH

DWN	K.N.KIRAN	13AUG2004
CHK	B.MOOIJ	27OCT2004
APVD	B.MOOIJ	27OCT2004
PRODUCT SPEC	108-19082	
APPLICATION SPEC	114-19029	
WEIGHT	0.00000	
CUSTOMER DRAWING		

TE Connectivity		
Z-PACK 2mm HM TYPE C 55 POS. VERTICAL FEMALE CONNECTOR ASSEMBLY		
SIZE	CAGE CODE	DRAWING NO
A2	00779	C=5106775
SCALE		5:1
SHEET		1 of 1
REV		J