

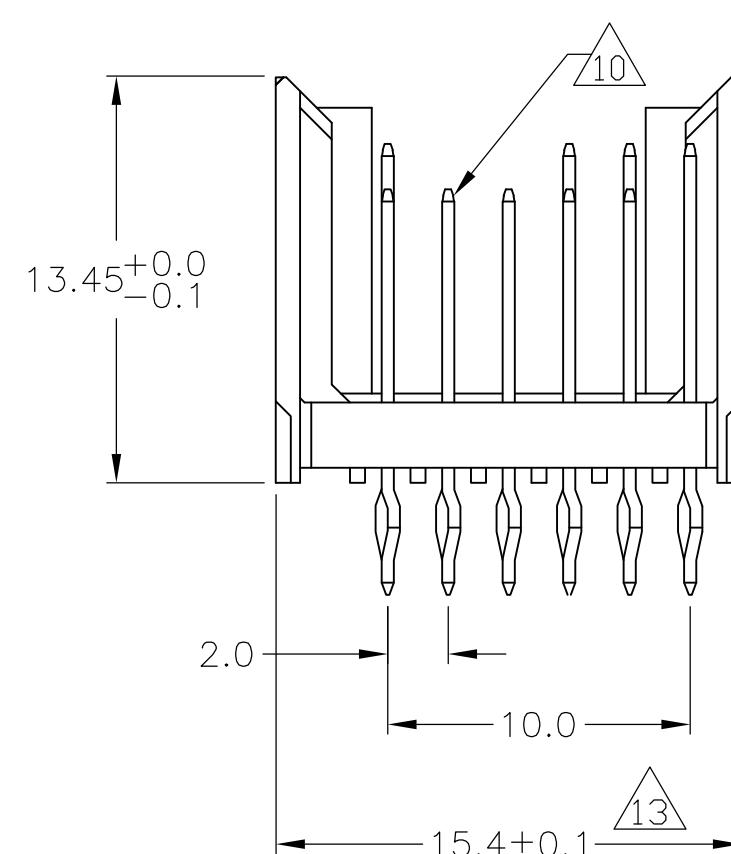


CONNECTOR ASSEMBLY
EXEMPLARY LOADED

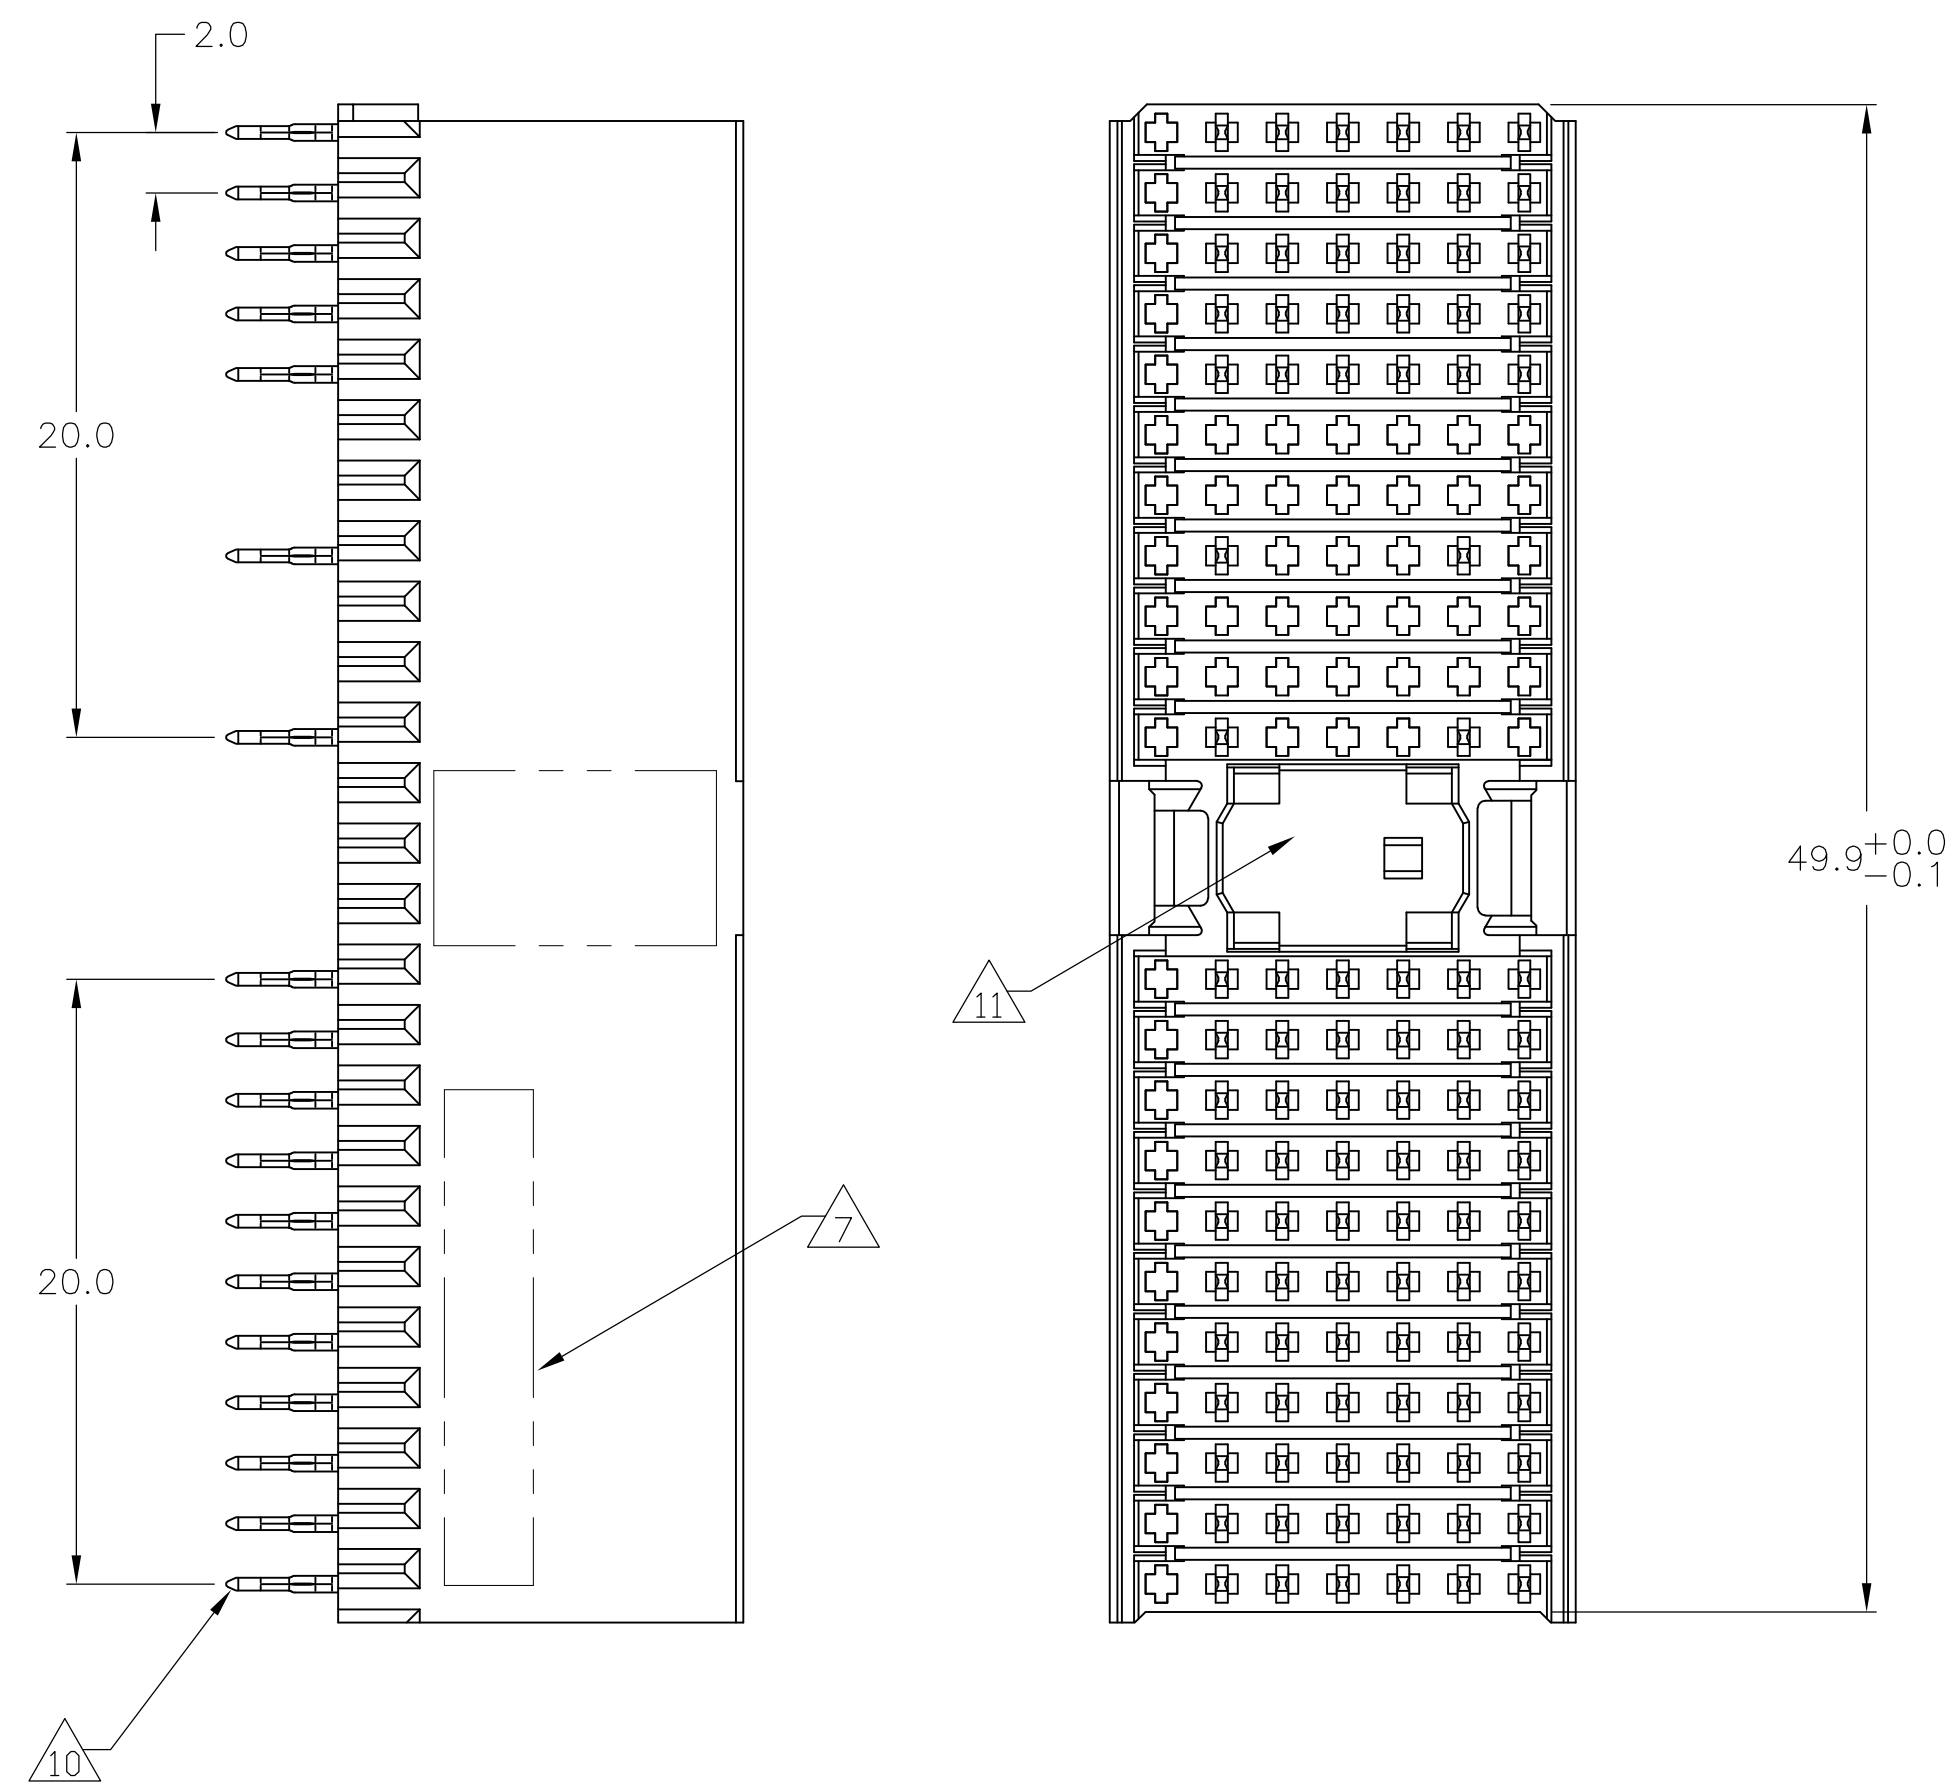

CONTACT DIMENSIONS


SCALE 5:1

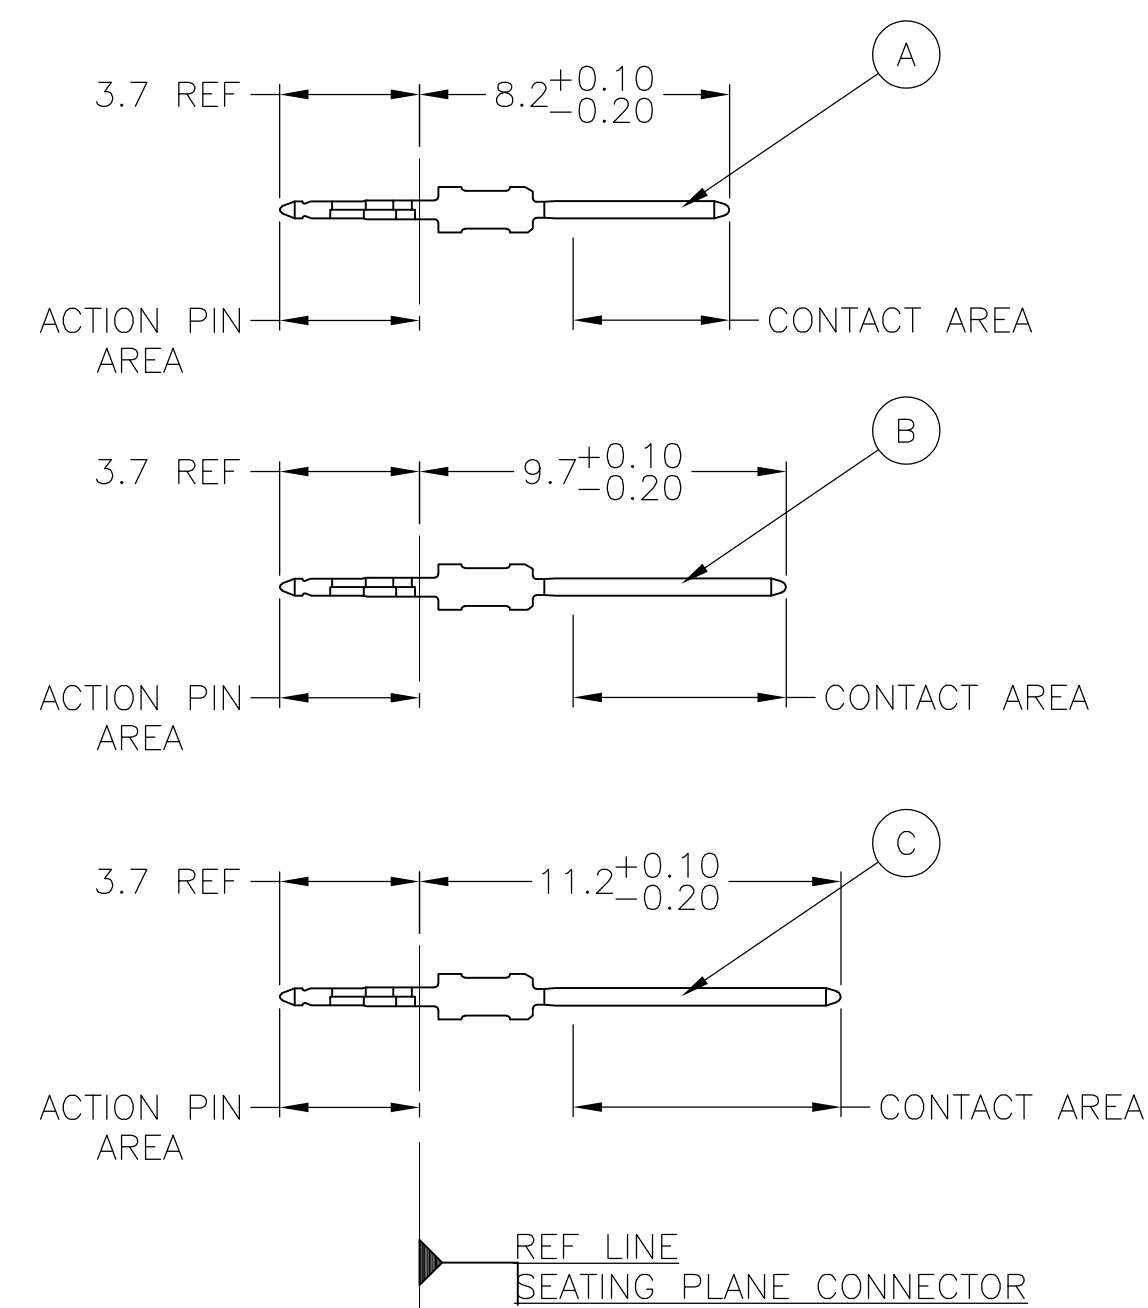

CONTACT LAYOUT

	z	a	b	c	d	e	f
1		B	B	B	B	B	C
2		B	B	B	B	B	C
3		B	B	A	B	B	C
4		B	B	B	B	B	C
5		C	B	B	B	C	C
6							
7							
8		B				B	
9							
10							
11		C				C	
MULTI PURPOSE CENTER							
15		B	B	B	C	B	C
16		B	B	B	C	B	C
17		B	B	B	C	B	C
18		B	B	B	C	B	C
19		B	B	B	C	B	C
20		B	B	B	C	B	C
21		B	B	B	C	B	C
22		B	B	B	C	B	C
23		B	B	B	C	B	C
24		B	B	B	B	C	C
25		B	B	B	B	B	C

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

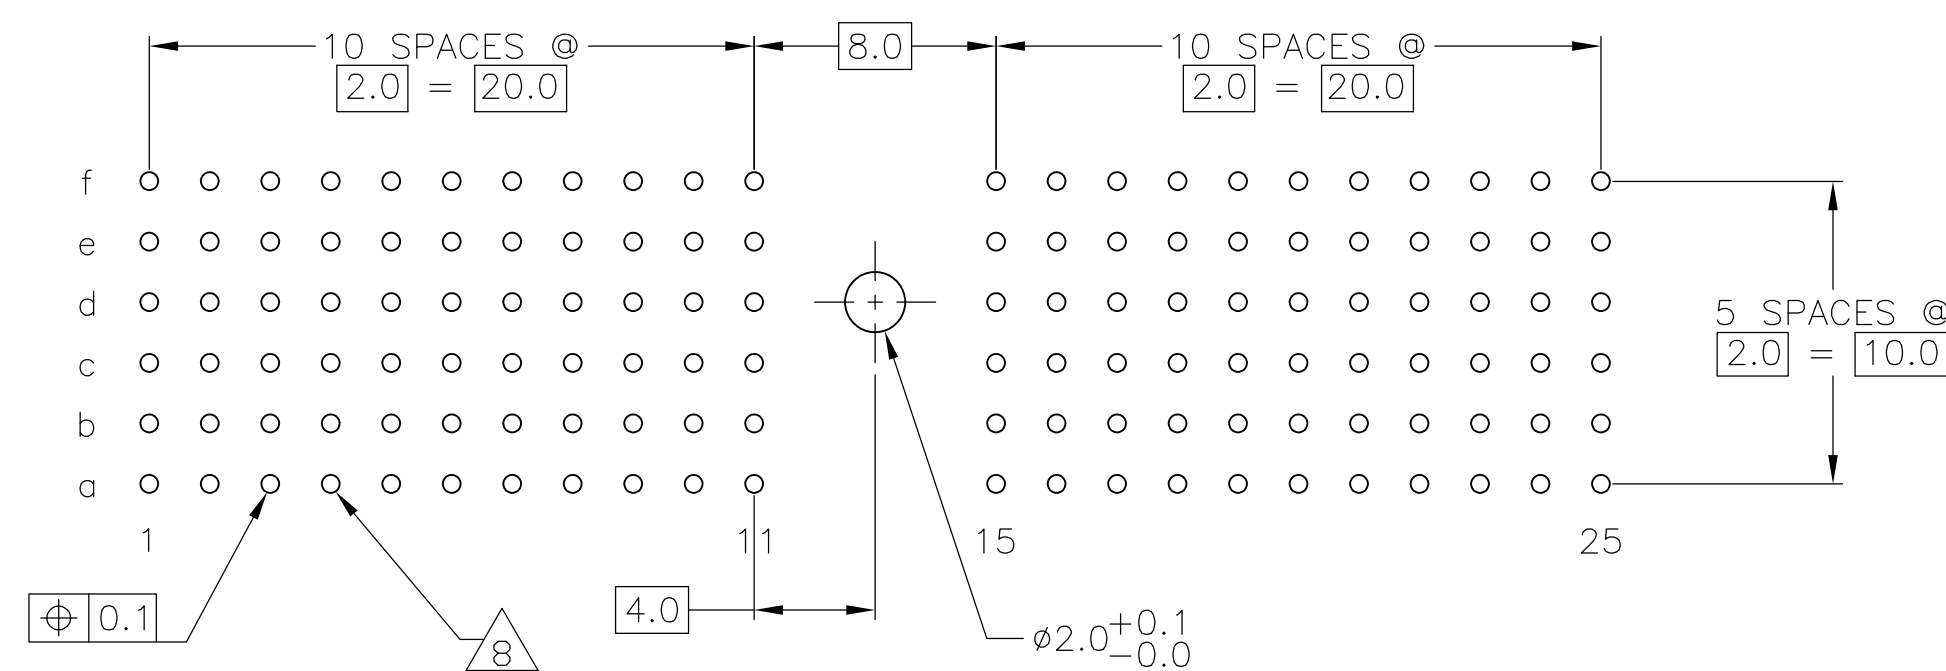

PLATED THRU HOLES PARAMETERS

REFERENCE APPLICATION SPECIFICATION

	  	1-352352-9
 OBSOLETE	  	352352-9
	 	352352-4
OBSOLETE	 	352352-1
	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 26 JULI05 B CARBO		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS:		OK 26 JULI05 G SKIPPER		NAME	
mm		APVD 26 JULI05 G SKIPPER		MALE ASSEMBLY, Z-PACK 2mm HM, TYPE A	
		PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL		WEIGHT		A1 00779 C-352352 -	
		FINISH		SCALE 4:1 SHEET 1 OF 2 REV G	
SEE TABLE		CUSTOMER DRAWING			

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOCAD

DIST00

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.

2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN\LEAD.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.

5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.

6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.

7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.

8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.

9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".

10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".

11

AREA RESERVED FOR KEYING PART (BASIC P/N 100525)

12

—

13

TO BE MEASURED AT BOTTOM OF SHROUD.

14

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

15

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWNB CARBO26JUL05

CHKGSKIPPER26JUL05

APVGGSKIPPER26JUL05

108-19082

114-19029

100779

352352

CUSTOMER DRAWING

SCALE4:1

SHEET2 OF 2

REV G

DIMENSIONS:
mm

0-PLG

1-PLG

2-PLG

3-PLG

4-PLG

ANGLES

±

±0.1

±

±

±

±

±0.2

DWNB CARBO26JUL05

CHKGSKIPPER26JUL05

APVGGSKIPPER26JUL05

108-19082

114-19029

100779

352352

CUSTOMER DRAWING

SCALE4:1

SHEET2 OF 2

REV G

DWNB CARBO26JUL05

CHKGSKIPPER26JUL05

APVGGSKIPPER26JUL05

108-19082

114-19029

100779

352352

CUSTOMER DRAWING

SCALE4:1

SHEET2 OF 2

REV G

DWNB CARBO26JUL05

CHKGSKIPPER26JUL05

APVGGSKIPPER26JUL05

108-19082

114-19029

100779

352352

CUSTOMER DRAWING

SCALE4:1

SHEET2 OF 2

REV G

AMP 4805 REV 31MAR2000