

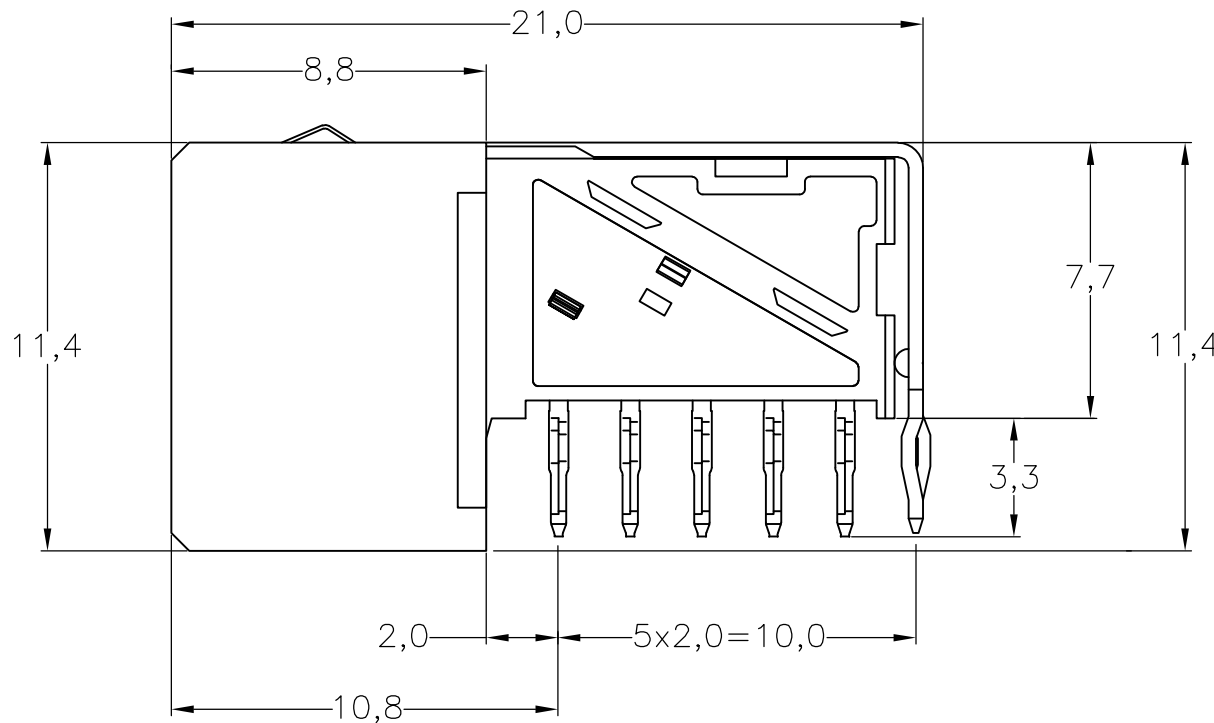
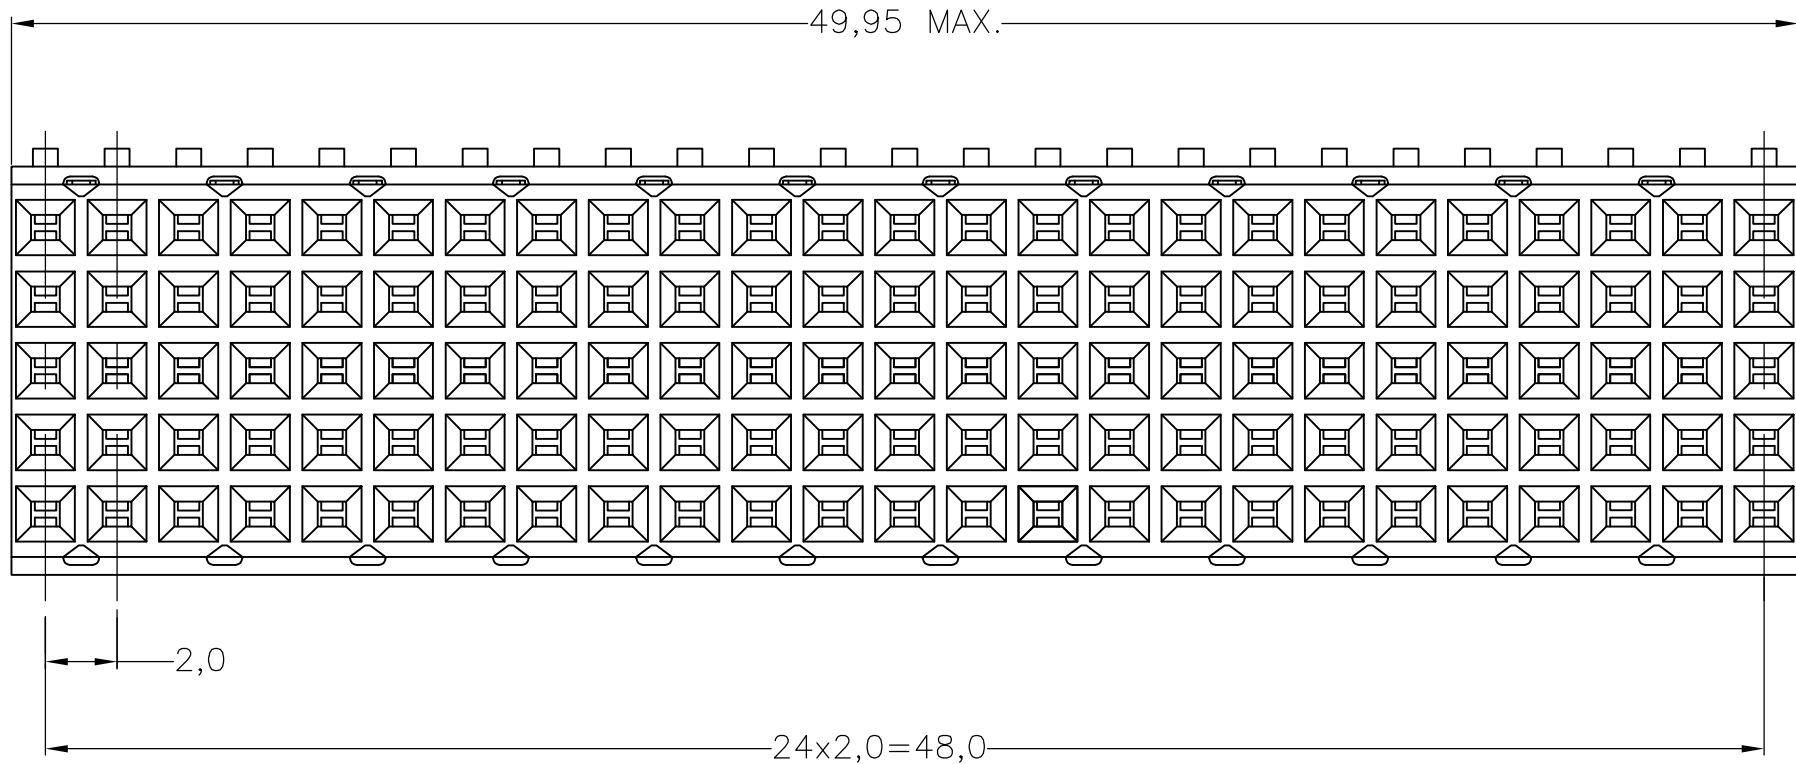
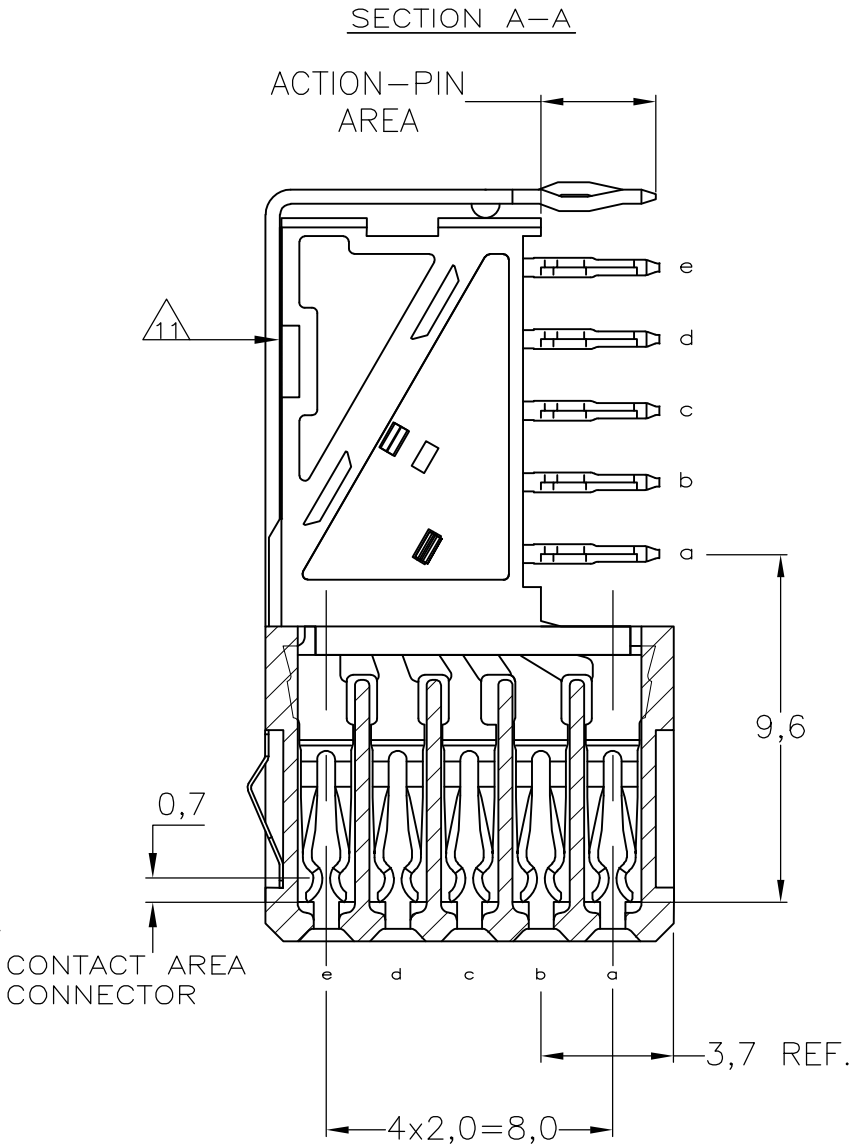


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	ECR-16-013251	12JUL2017	FL	SY

- NOTES:
- △ MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - △ 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - △ 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - △ 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - △ 6 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - △ 8 ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - △ 9 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B
125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - △ 10 ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
 - △ 11 SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
 - 12. BASIC P.N. LOWERSHIELD: 338110
 - △ 13 0.76µm MIN GOLD PLATING AT MATING SURFACES.

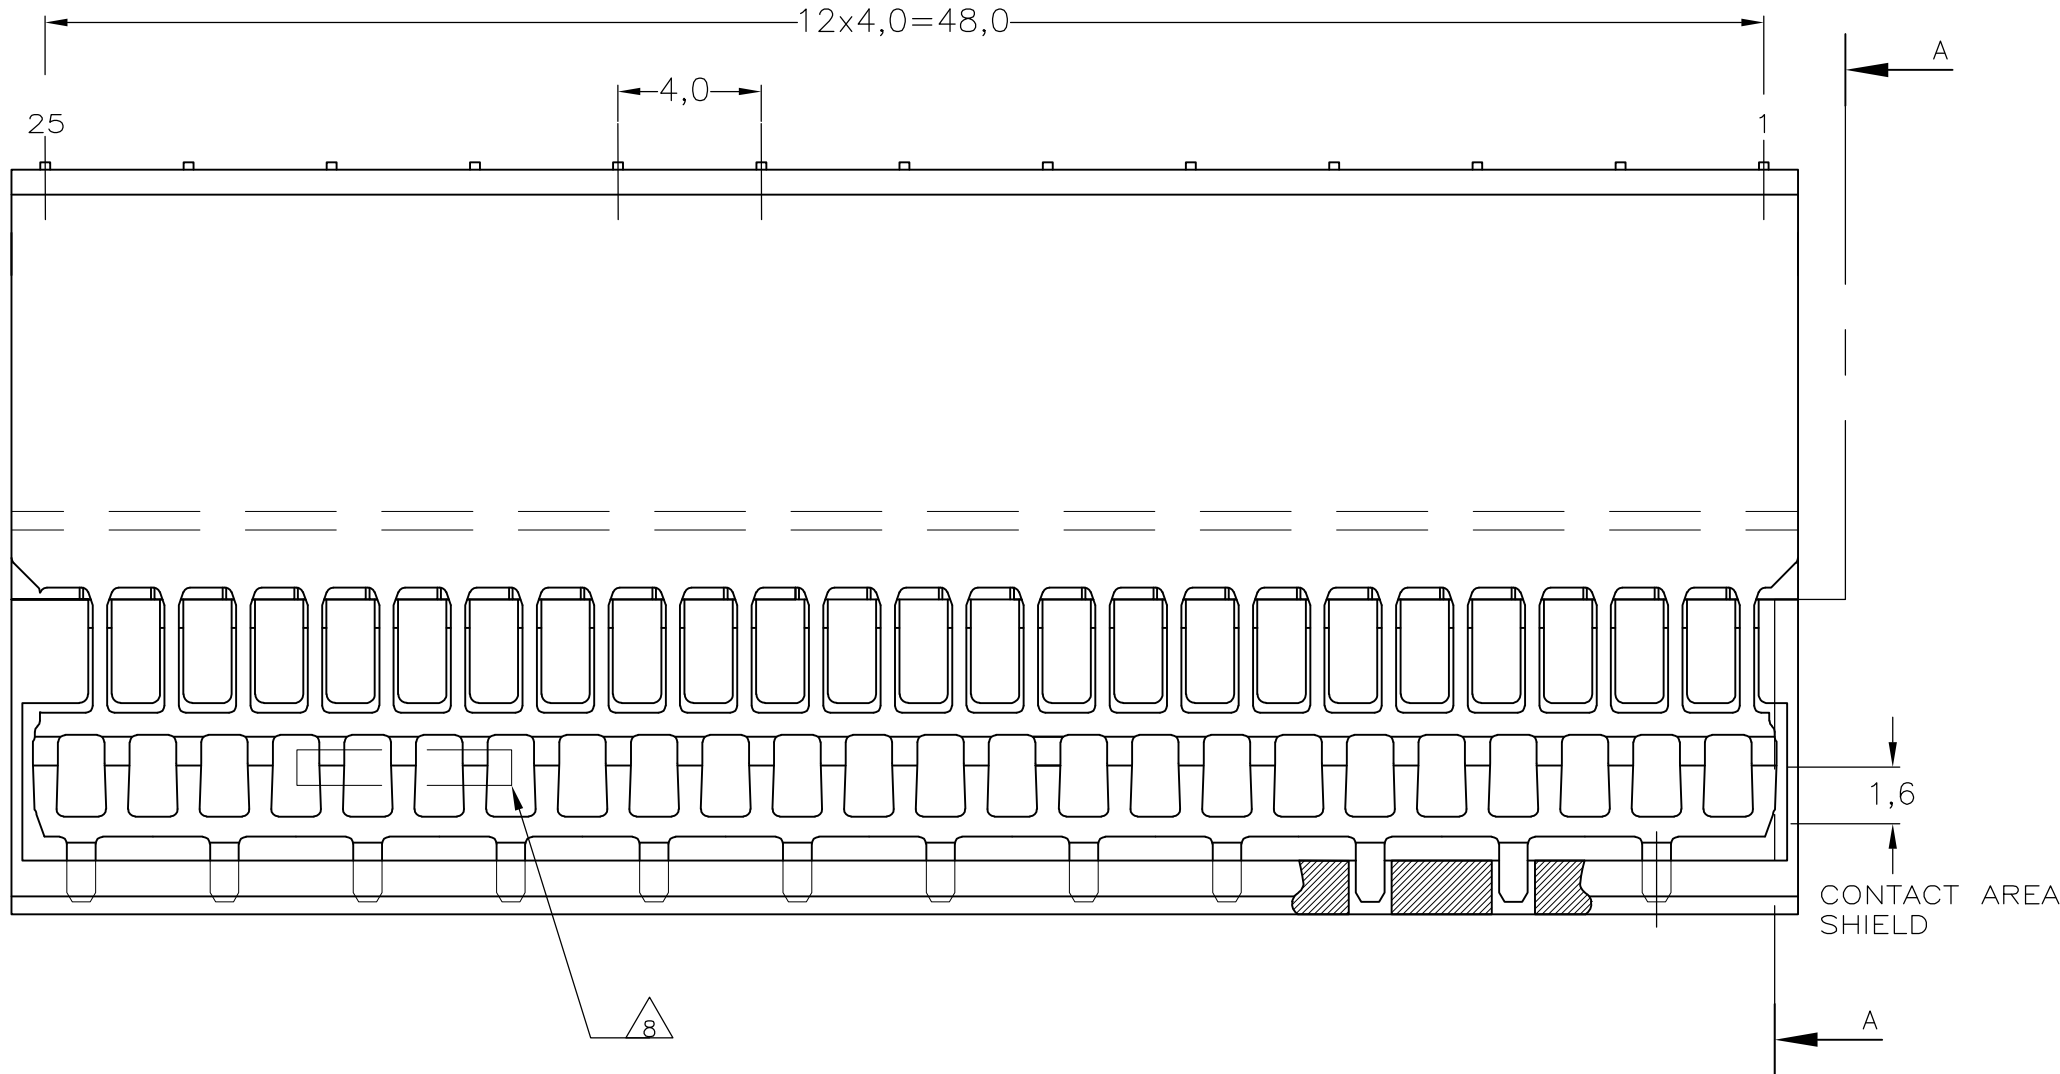

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

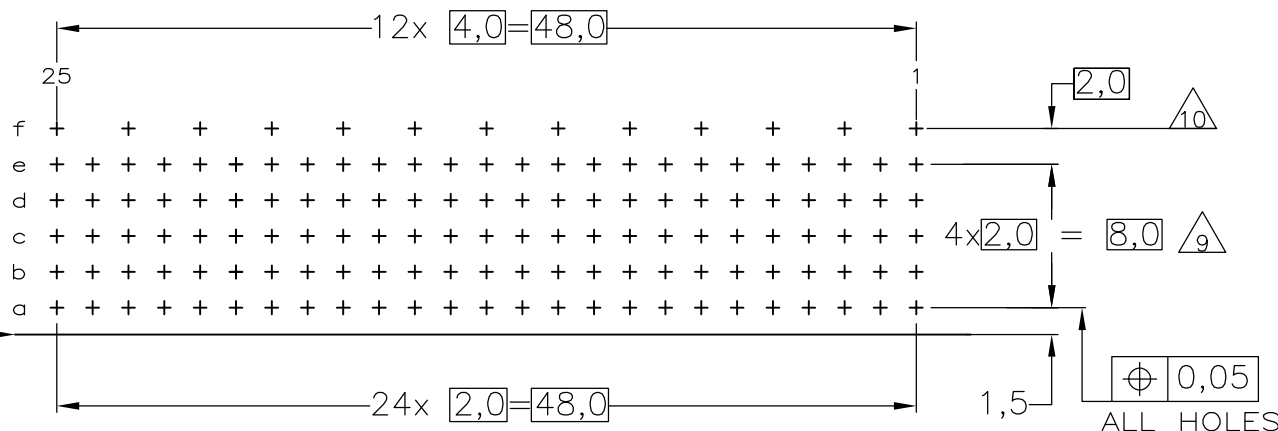

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

OBsolete	△△△13	△	3-352069-0
OBsolete	△△△6	△	352069-9
OBsolete	△△4	△	352069-4
	△△3	△	352069-1
FINISH		MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN	20JAN97	TE Connectivity	
DIMENSIONS: mm		CHK —	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	—	NAME	
0-PLC ±		PRODUCT SPEC		Z-PACK 2MM HM	
1-PLC ±		108-19082		TYPE B - 25 COLUMNS	
2-PLC ±		APPLICATION SPEC		PRE-SHIELDED RECEPTACLE	
3-PLC ±		114-19029		SIZE	CAGE CODE
4-PLC ±		WEIGHT		A2	00779
ANGLES ±		CUSTOMER DRAWING		DRAWING NO	RESTRICTED TO
FINISH		SCALE		C=352069	—
		SHEET		NTS	1 of 1
				REV	M