

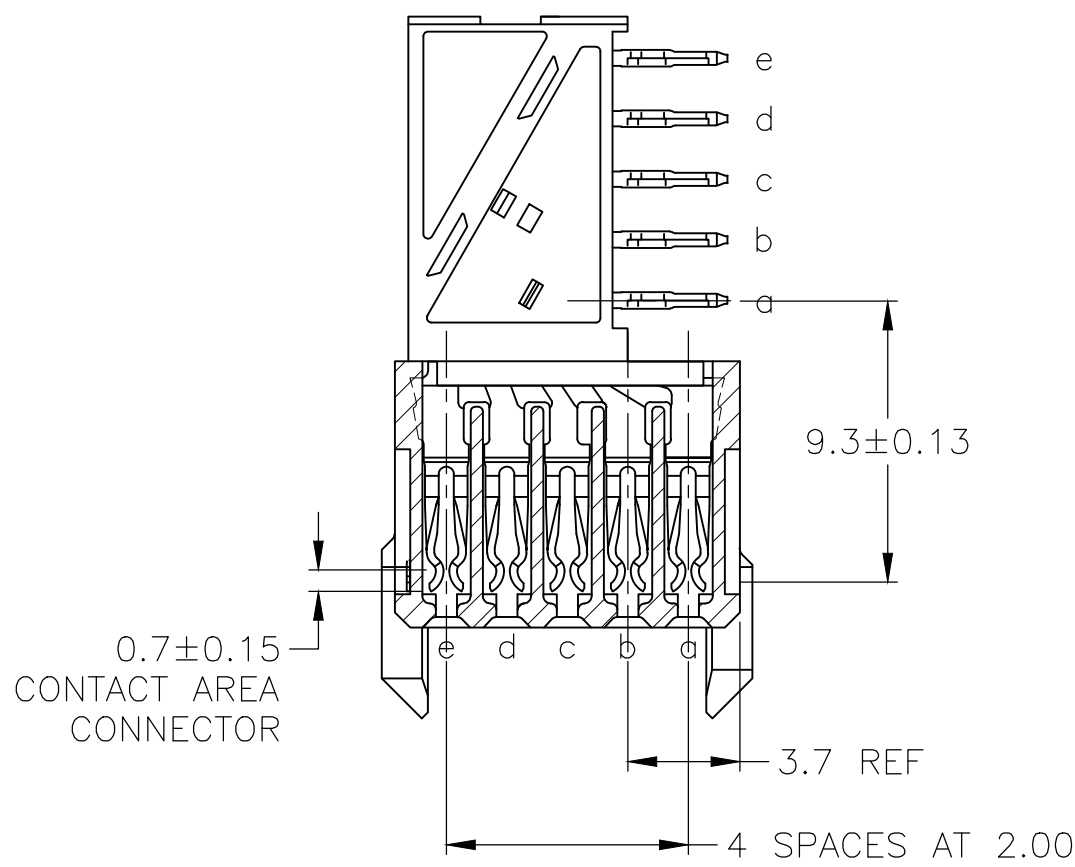
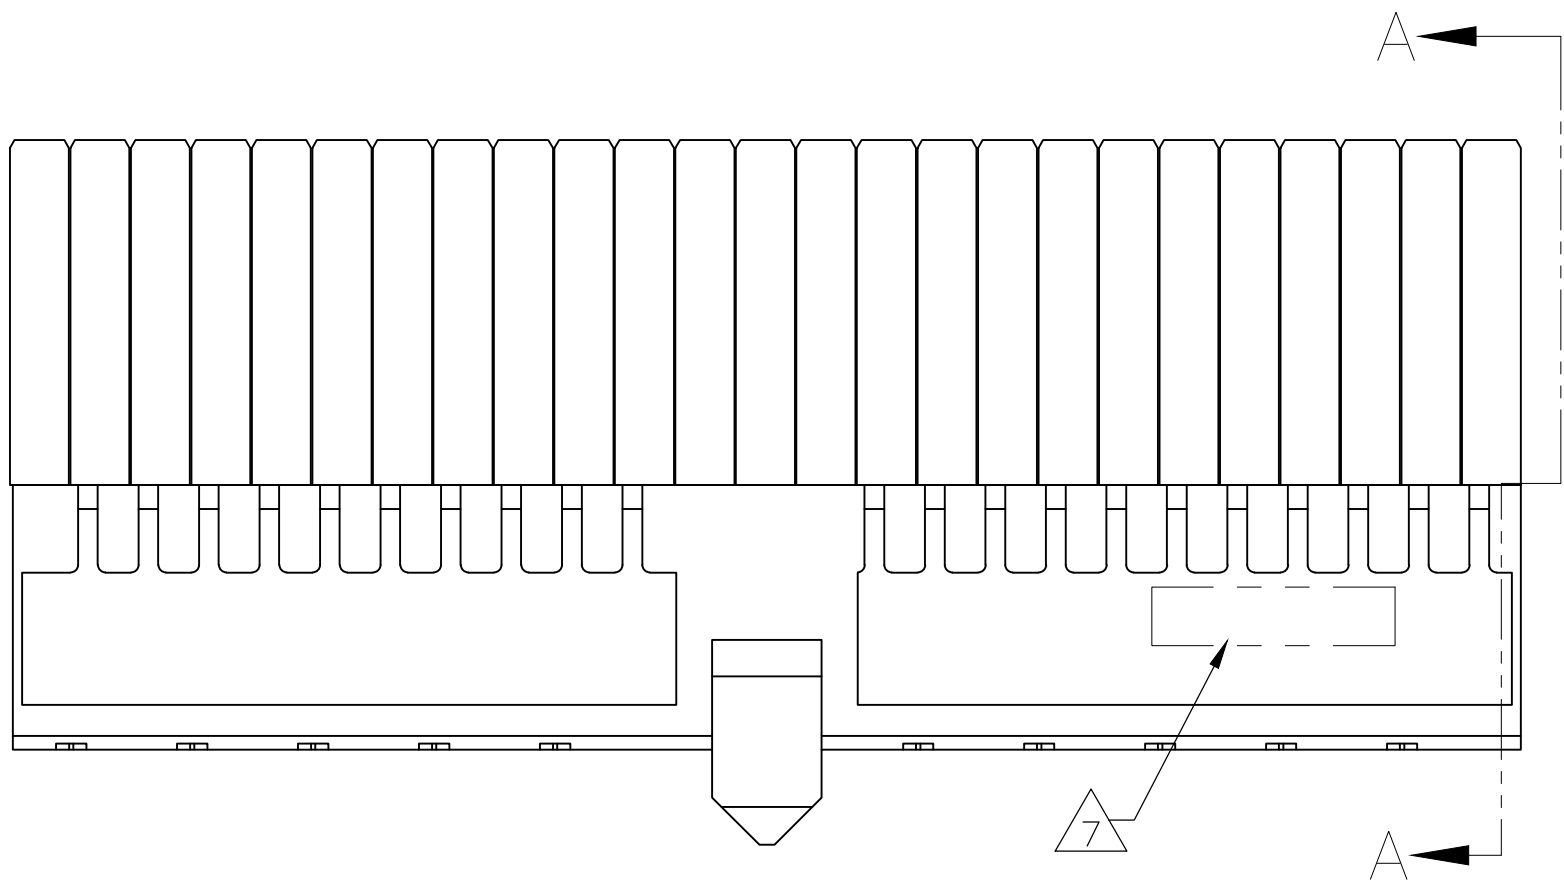


REVISIONS					
REV	LTR	DESCRIPTION	DATE	DWN	APVD
E		REV PER ECR-18-007319	12DEC2018	FL	HL

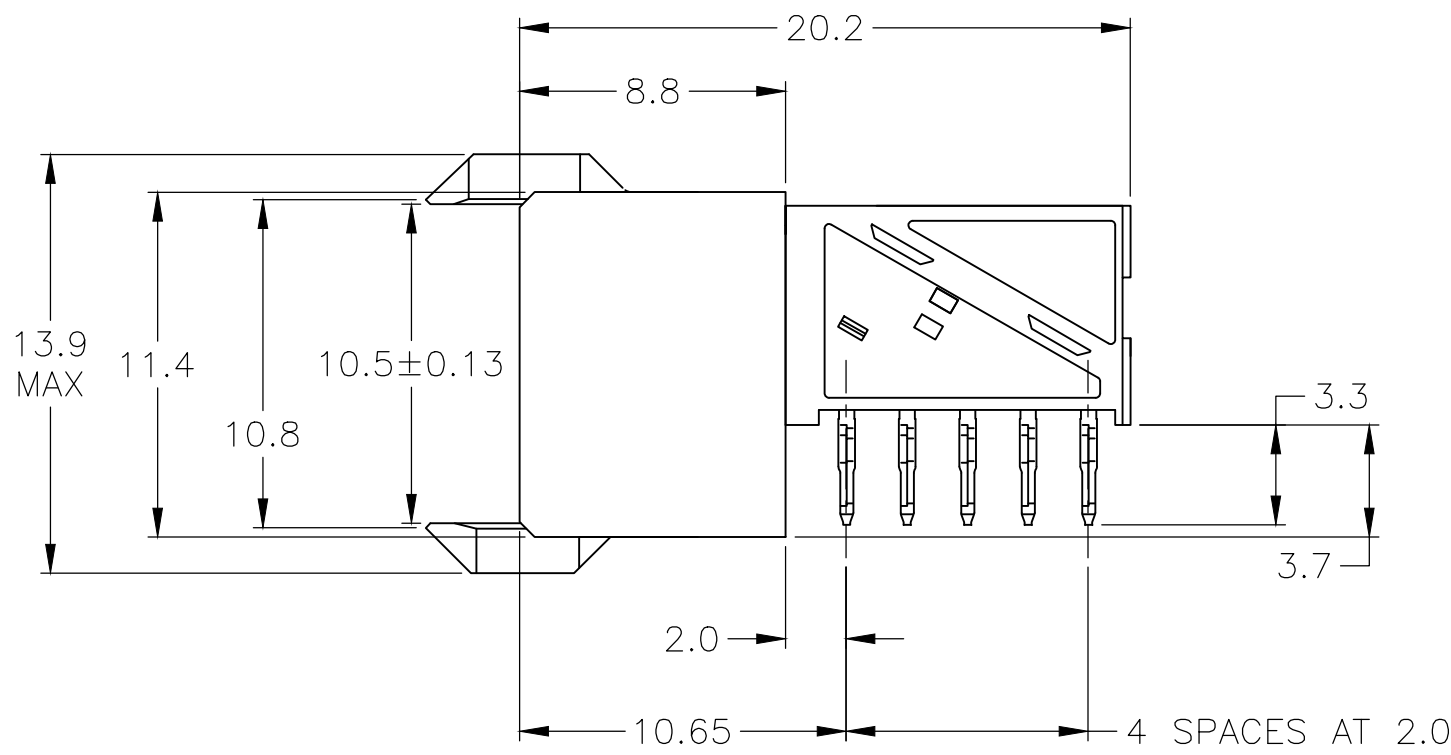

SECTION A-A

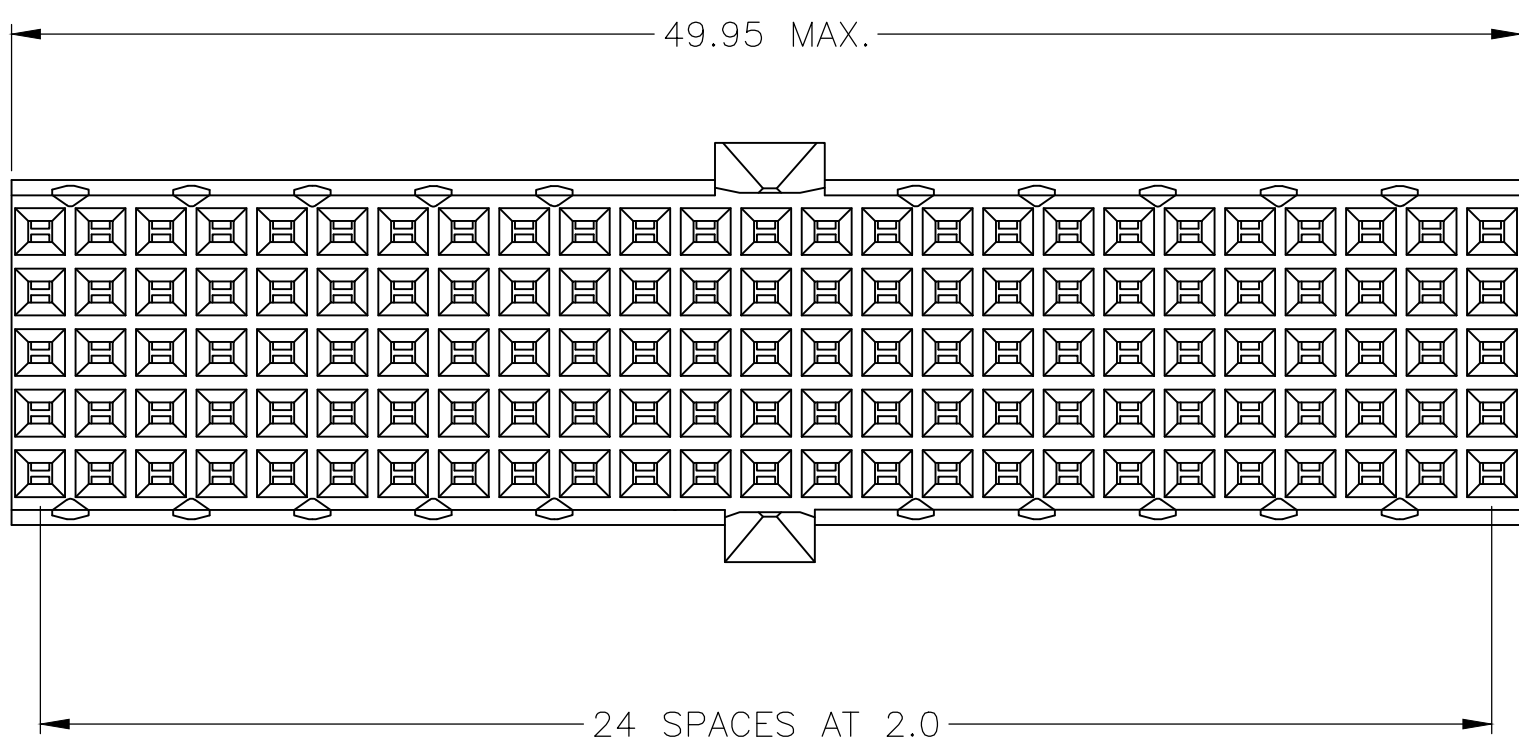

- 1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- 6


CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.
- 7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8

HOLE PATTERN FOR FEMALE CONNECTOR TYPE A/B 125 PLATED-
THROUGH HOLES AT 2x2mm SQUARE GRID.
- 9

CONNECTOR LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE TR-NWT-001217 ISSUE 1, SEPT 1992.
- 10

0.76µm MIN. GOLD PLATING AT MATING SURFACES.

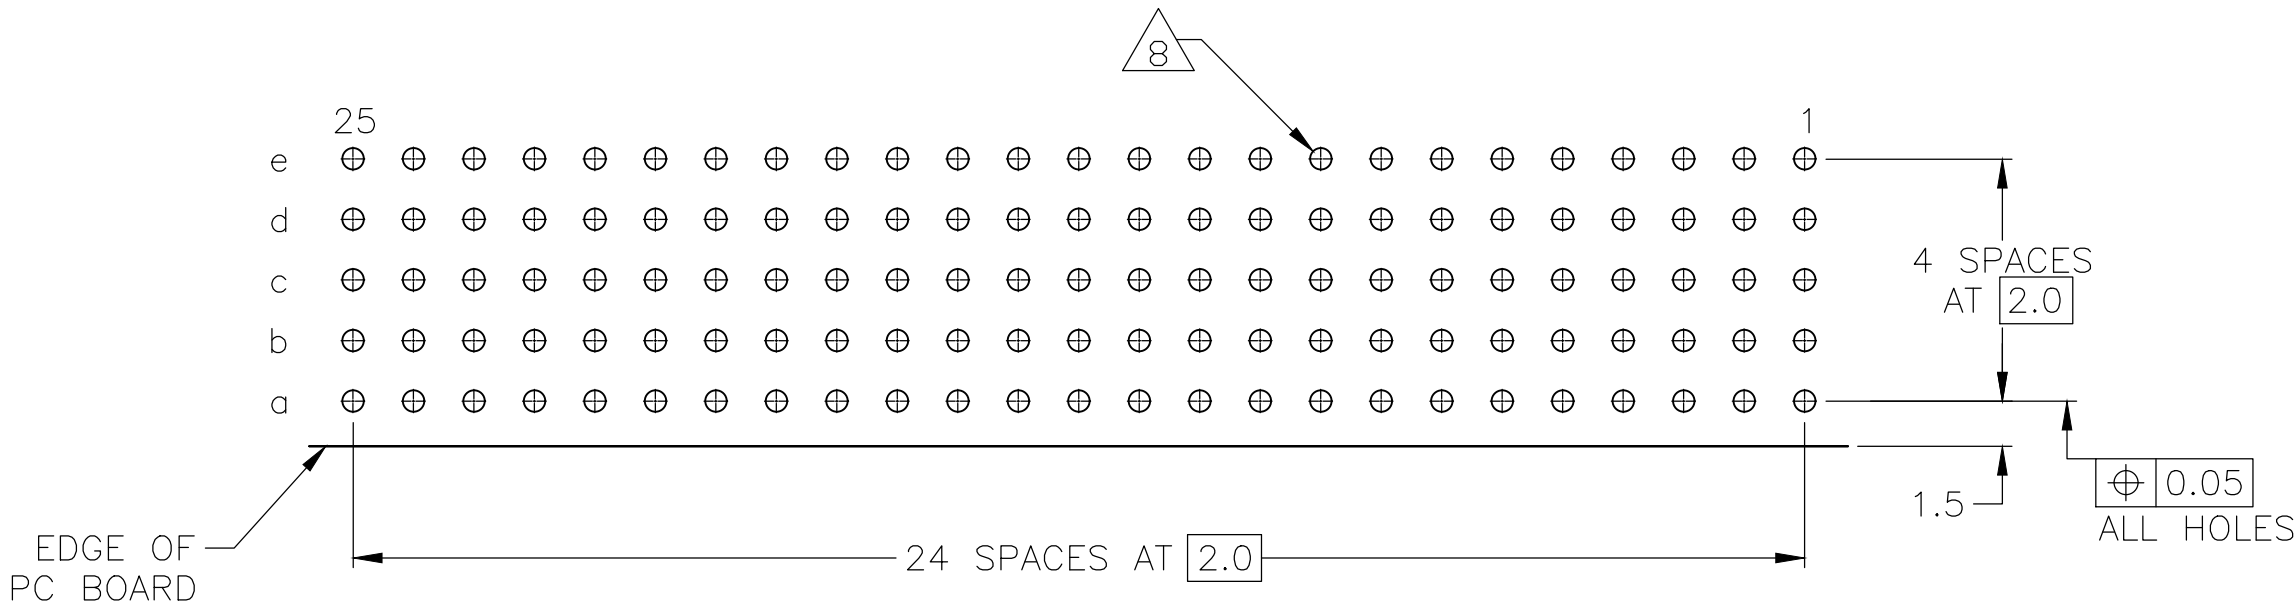

PCB HOLE DIM ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE AS SHOWN)

	2310	3-5646574-0
OBSOLETE	259	1 5646574-9
OBSOLETE	259	5646574-9
	24	5646574-4
	23	5646574-1
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 11MAR05	TE TE Connectivity	
		CHK G. SKIPPER 11MAR05		
DIMENSIONS: mm		APVD G. SKIPPER 11MAR05	NAME	
		PRODUCT SPEC	RECEPTACLE ASSEMBLY, Z-PACK	
		108-19082	Z-PACK 2mm HM, TYPE A/B	
		APPLICATION SPEC		
MATERIAL		114-19029	SIZE	CAGE CODE
1		WEIGHT	0.000000	DRAWING NO
		CUSTOMER DRAWING	A100779	5646574
		SCALE	4:1	SHEET
				1 of 1
				REV
				E