




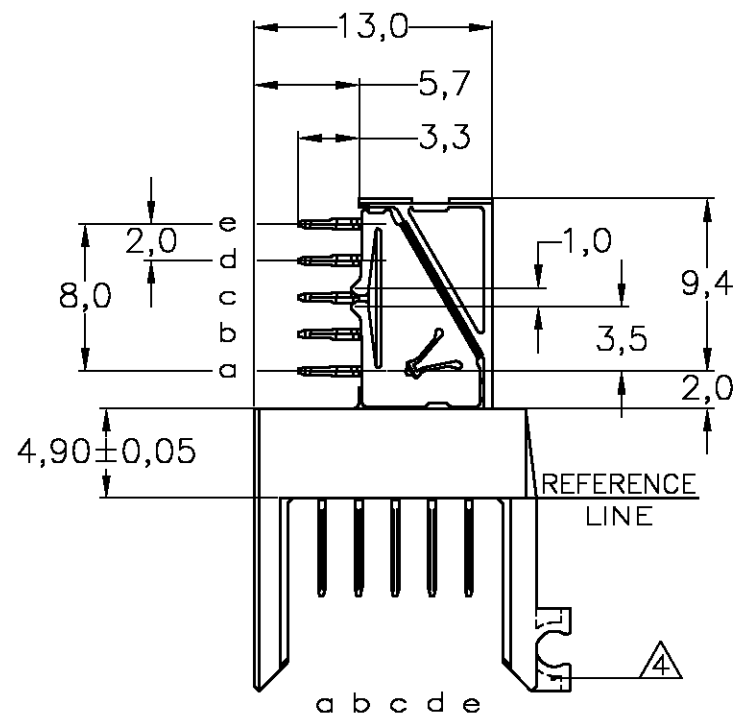


CONNECTOR ASSEMBLY
EXEMPLARY LOADED

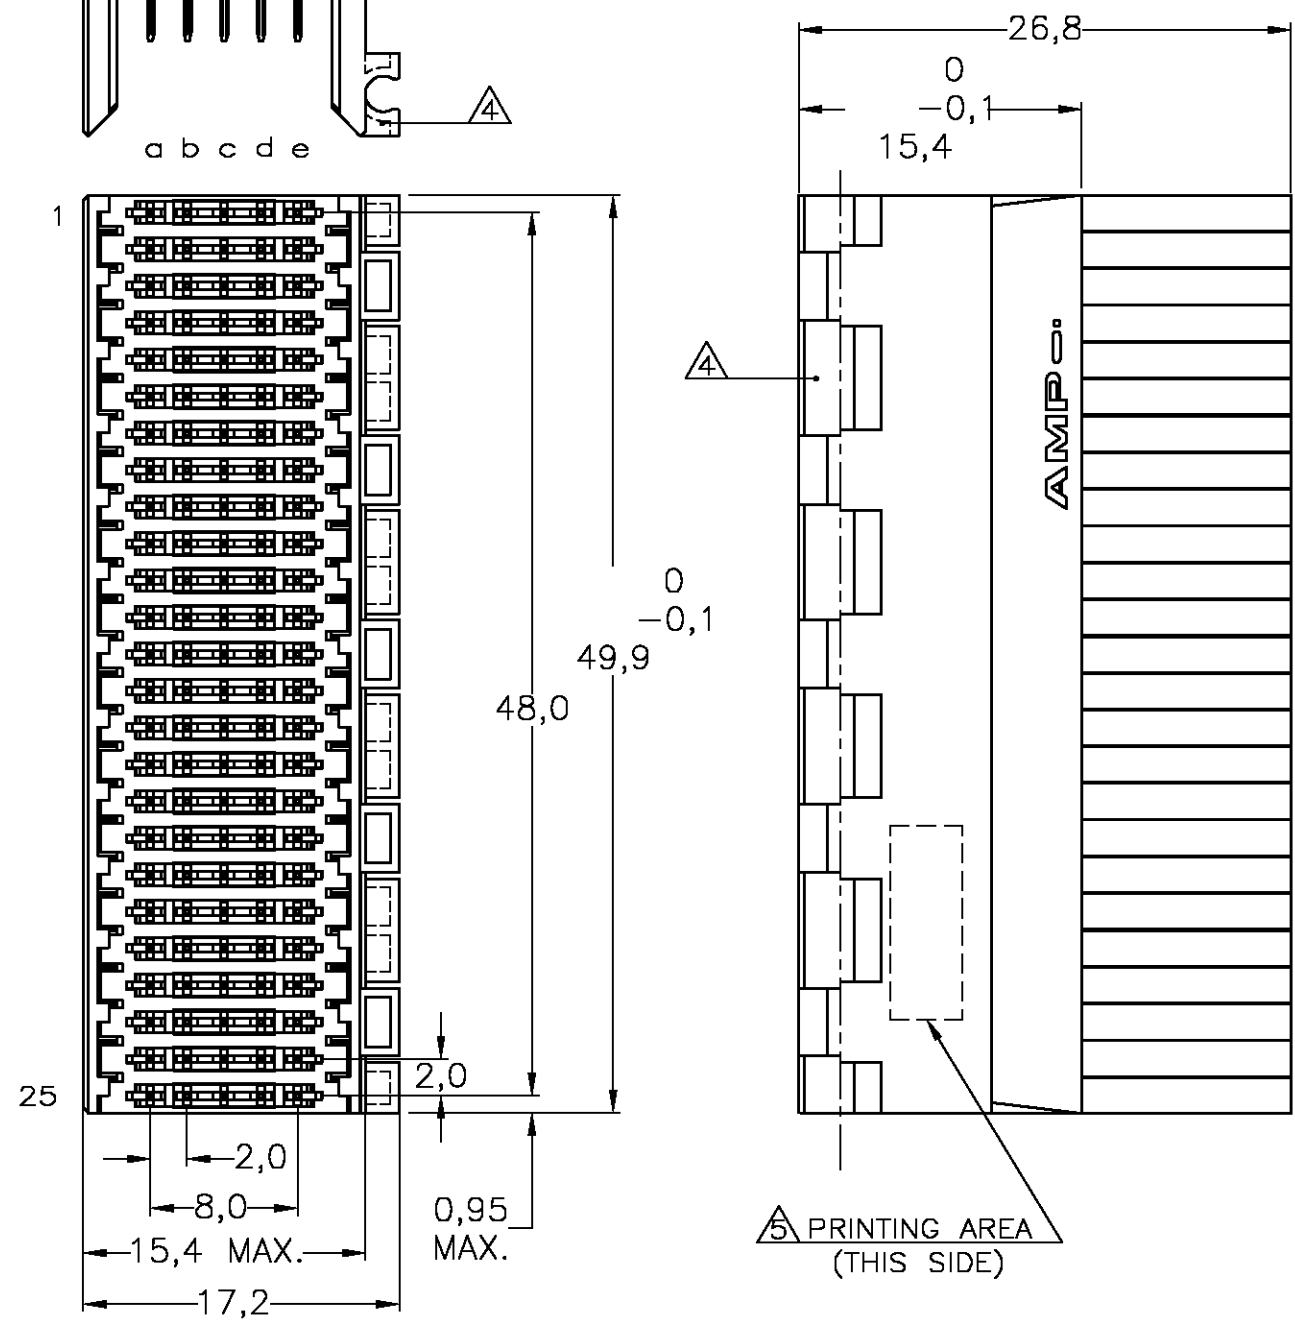

CONTACT DIMENSIONS

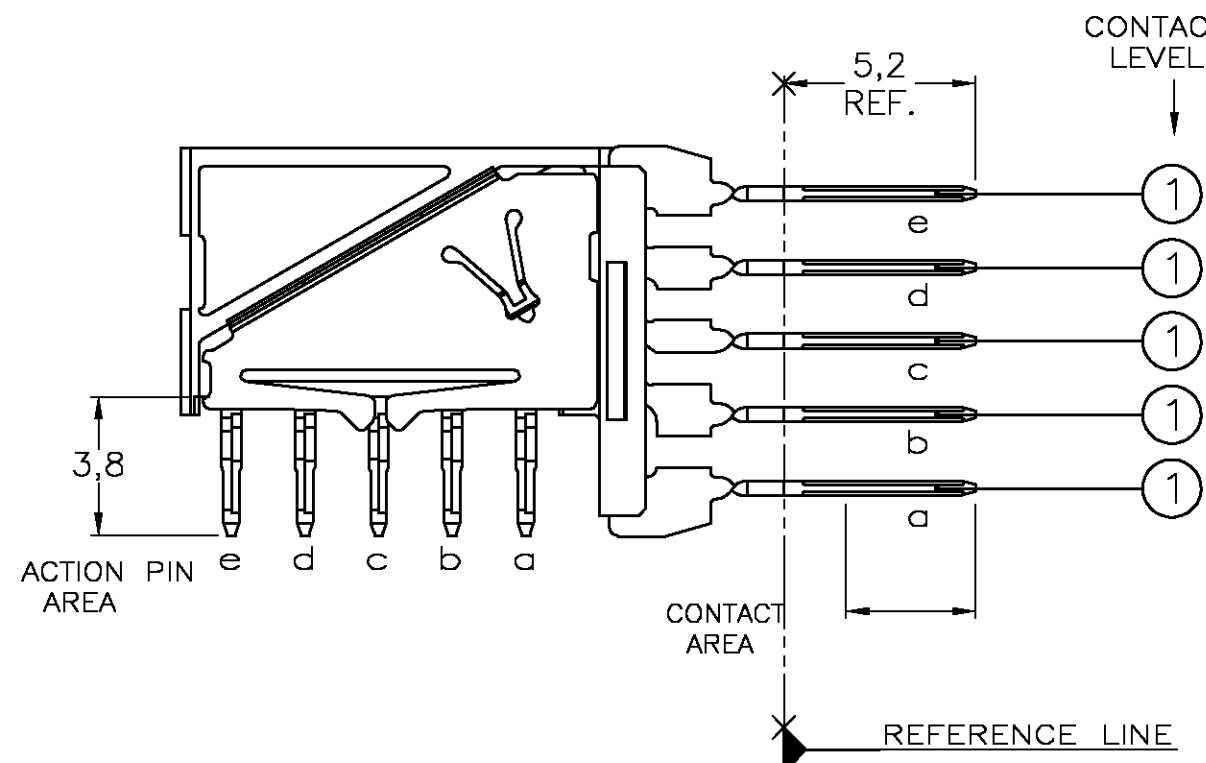

RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN

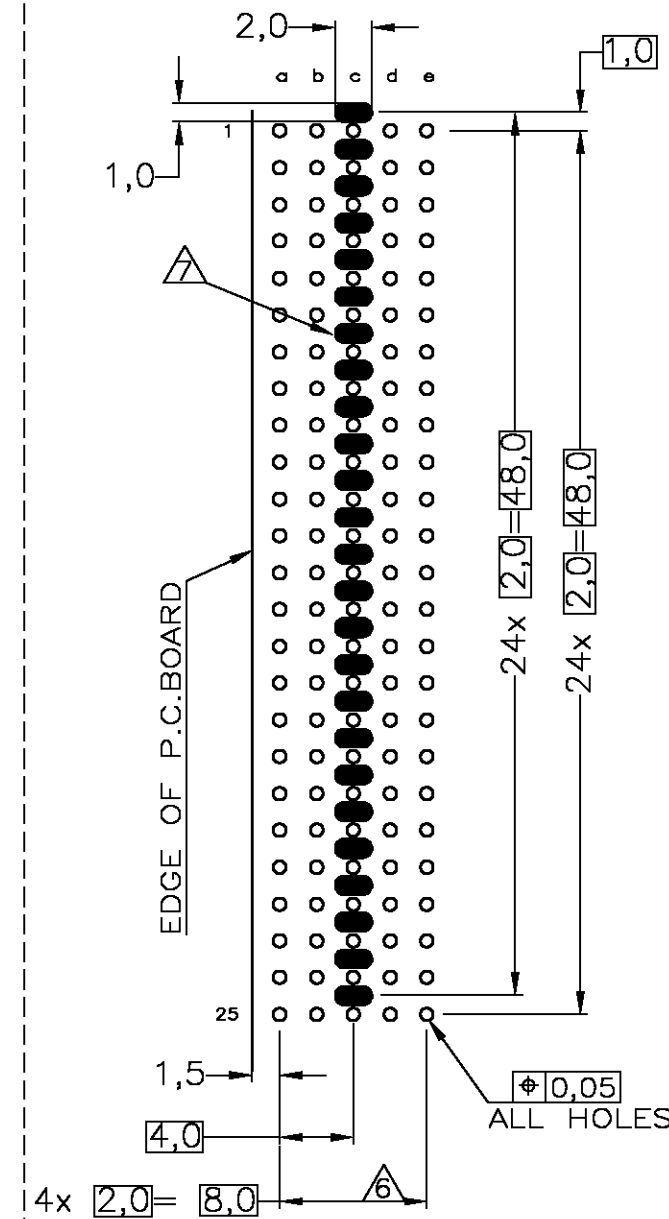

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

CONTACT LAYOUT

	a	b	c	d	e
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1
6	1	1	1	1	1
7	1	1	1	1	1
8	1	1	1	1	1
9	1	1	1	1	1
10	1	1	1	1	1
11	1	1	1	1	1
12	1	1	1	1	1
13	1	1	1	1	1
14	1	1	1	1	1
15	1	1	1	1	1
16	1	1	1	1	1
17	1	1	1	1	1
18	1	1	1	1	1
19	1	1	1	1	1
20	1	1	1	1	1
21	1	1	1	1	1
22	1	1	1	1	1
23	1	1	1	1	1
24	1	1	1	1	1
25	1	1	1	1	1

NOTES:

- MATERIAL HOUSING : GREY GLASSFILLED POLYESTER
UL-RATING V0
- CONTACT : PHOSPHORBRONZE
- GENERAL CONTACT PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
REDUCED CROSS-TALK SHIELD: GOLD FLASH OVER 1,27µm NICKEL MIN.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.
- CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- PLATED SPOT ONLY ON COMPONENT SIDE, FORMING ONE CONTACT
WITH PLATED THROUGH HOLES OF ROW C

CONTACT FINISH	MATERIAL	1-352272-1
CONTACT FINISH	MATERIAL	352272-1
CONTACT FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.V.D.HEJNDEN 12FEB98	Tyco Electronics Corporation	
		CHK D.TRUREN 12FEB98	s-HertogenBosch, Netherlands,	
		APVD F.V.KONINGSBRUGGE	NAME	
DIMENSIONS: mm		PRODUCT SPEC 108-19082	Z-PACK 2MM HM TYPE B	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-19029	125 POS. RIGHT ANGLE MALE CONNECTOR	
MATERIAL		WEIGHT	WITH REDUCED CROSS-TALK SHIELDS	
			SIZE CAGE CODE DRAWING NO	
			A2 00779 C=352272	
			RESTRICTED TO	
			CUSTOMER DRAWING	
			SCALE NTS SHEET 1 OF 1 REV F	