






LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	RELEASED PER ECR ECR-11-010943	30MAY11	RC	CW

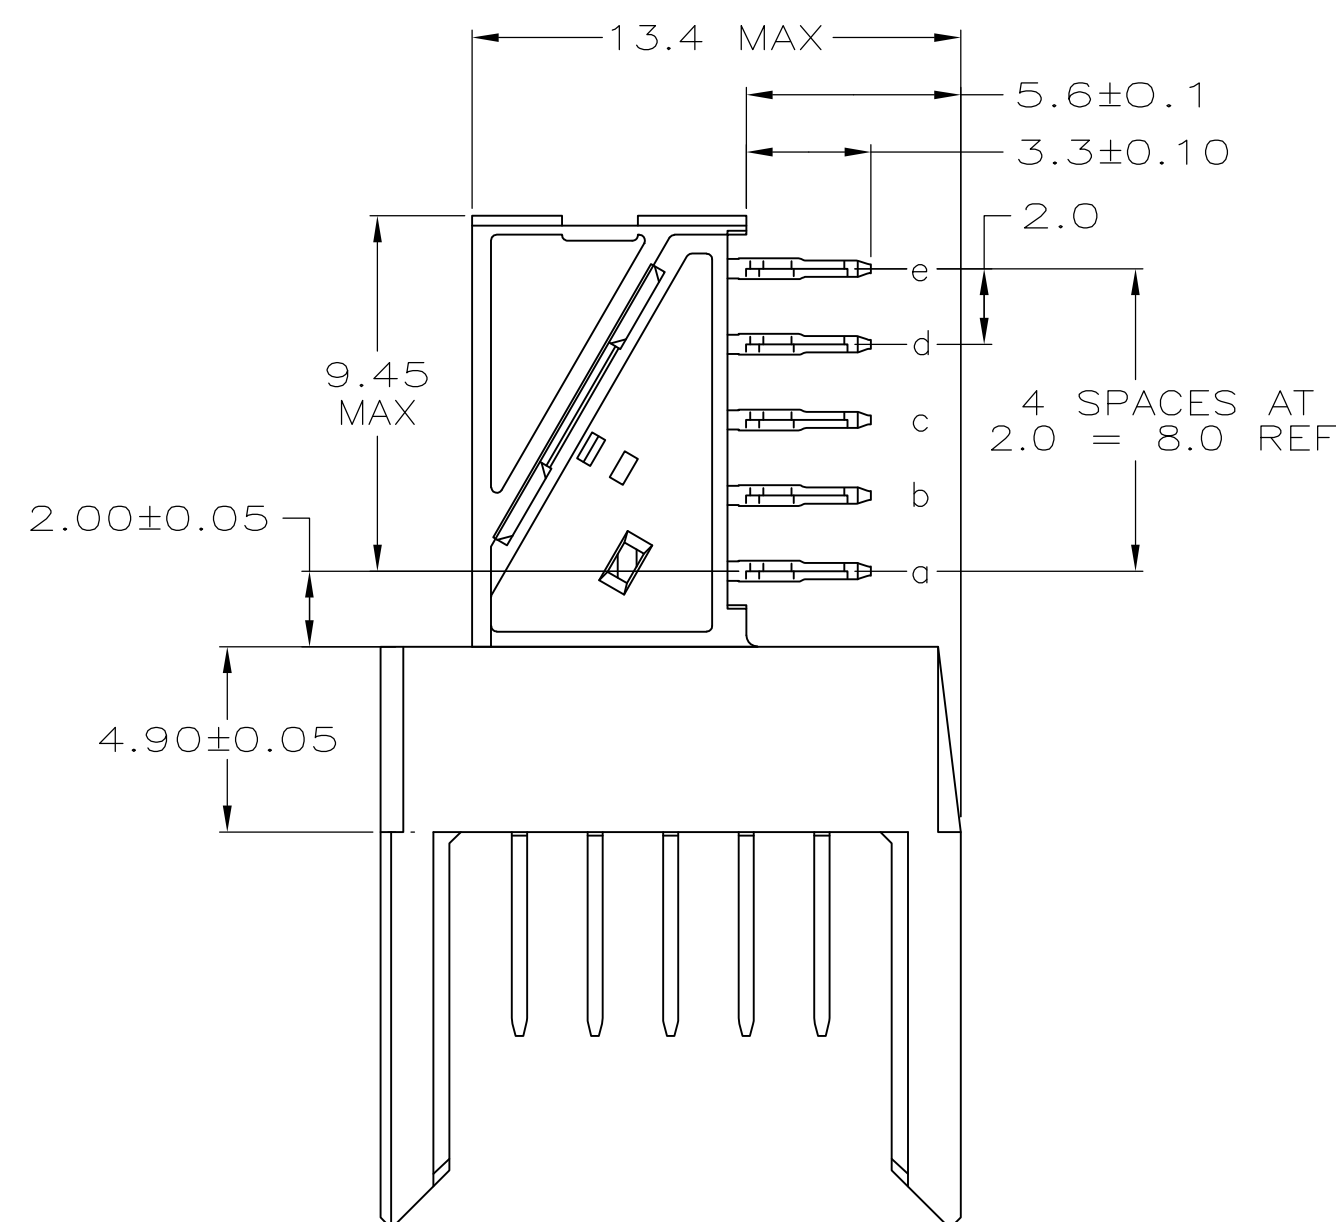

CONTACT DIMENSIONS

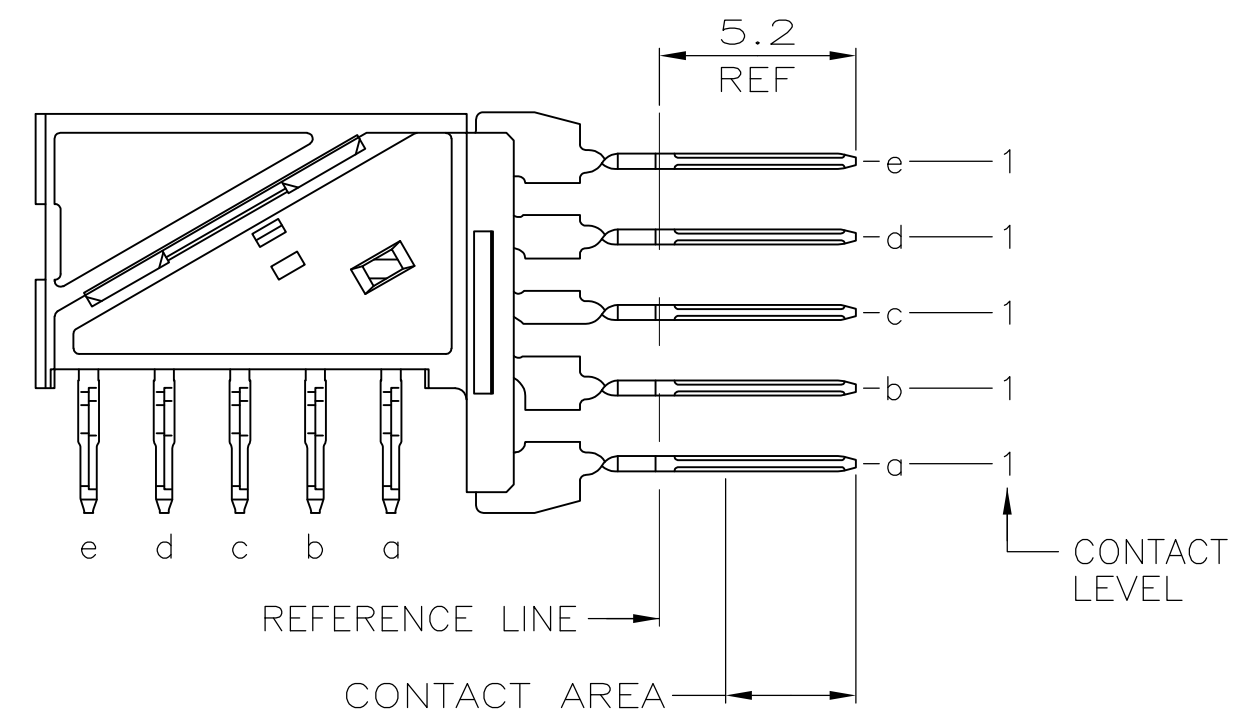

- 1 MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.
- 7 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 8 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
- 9 FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- 10 CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

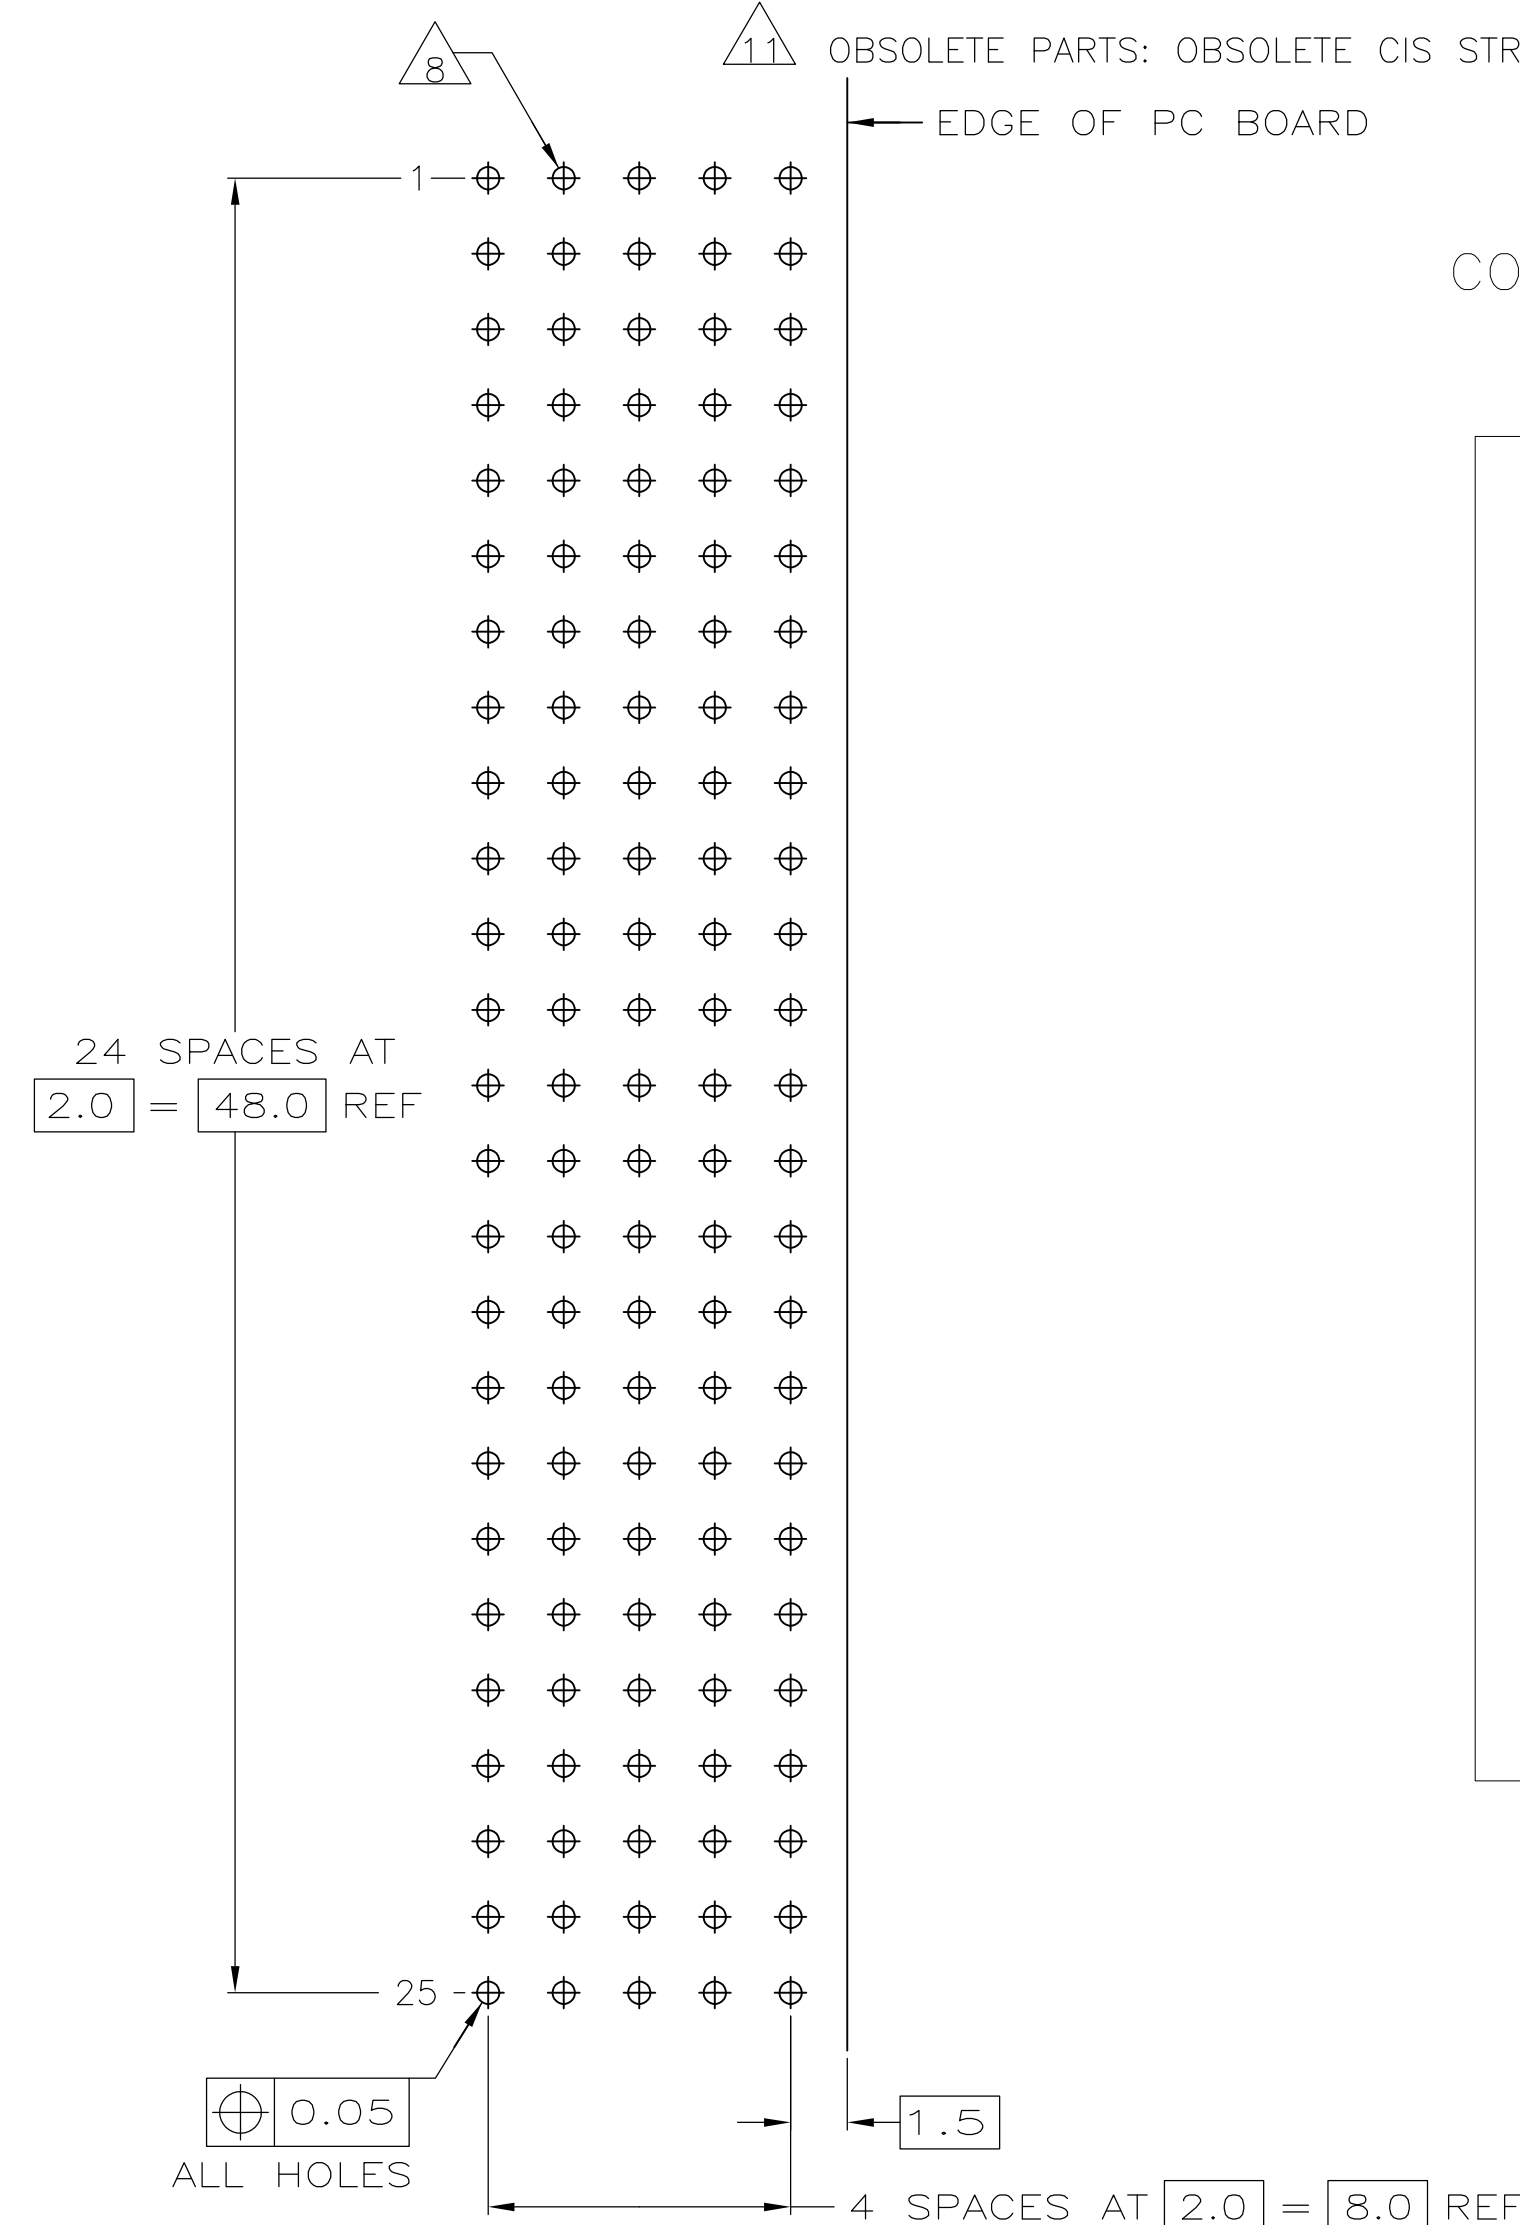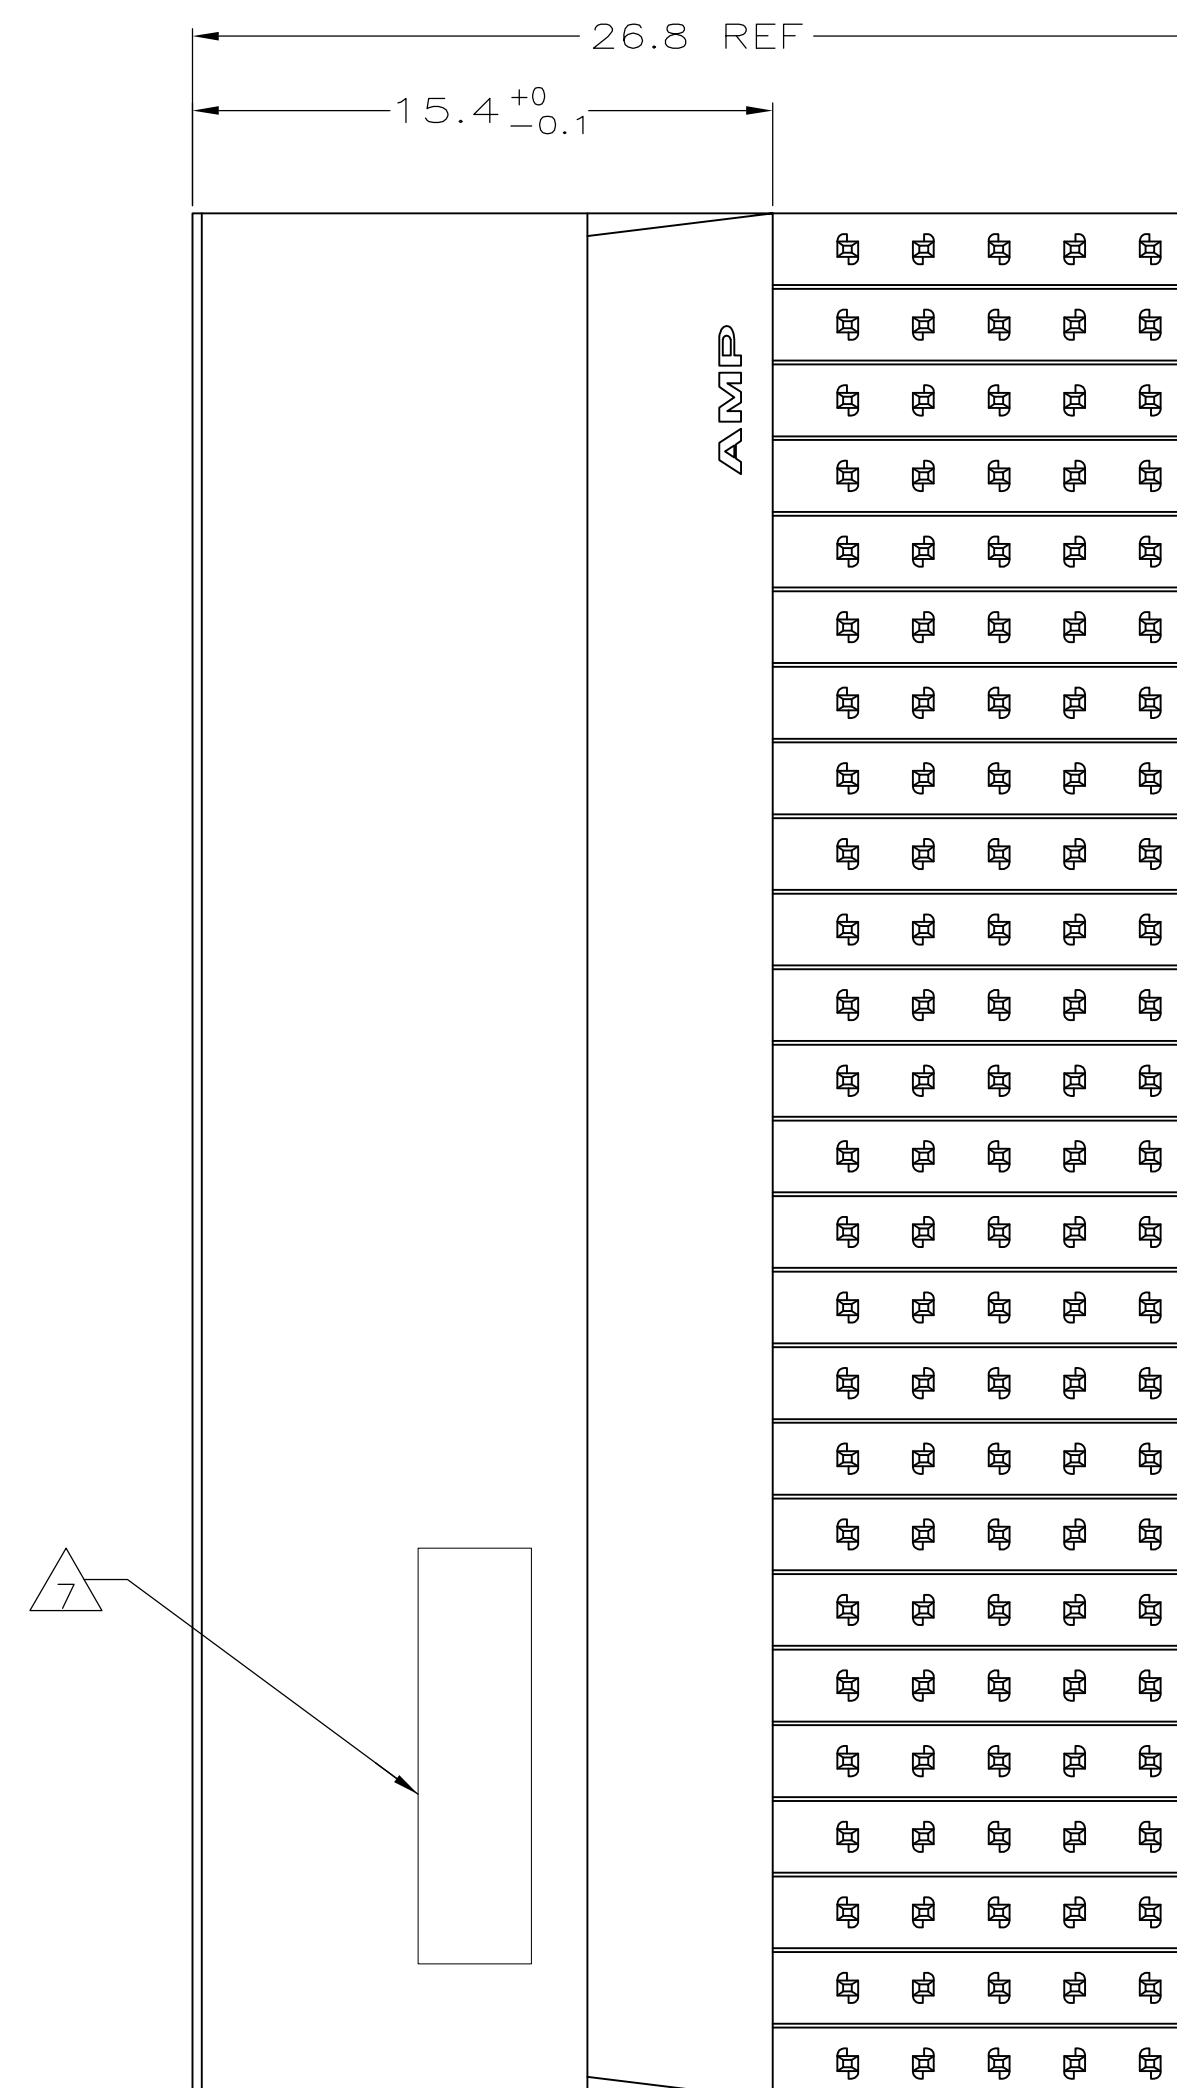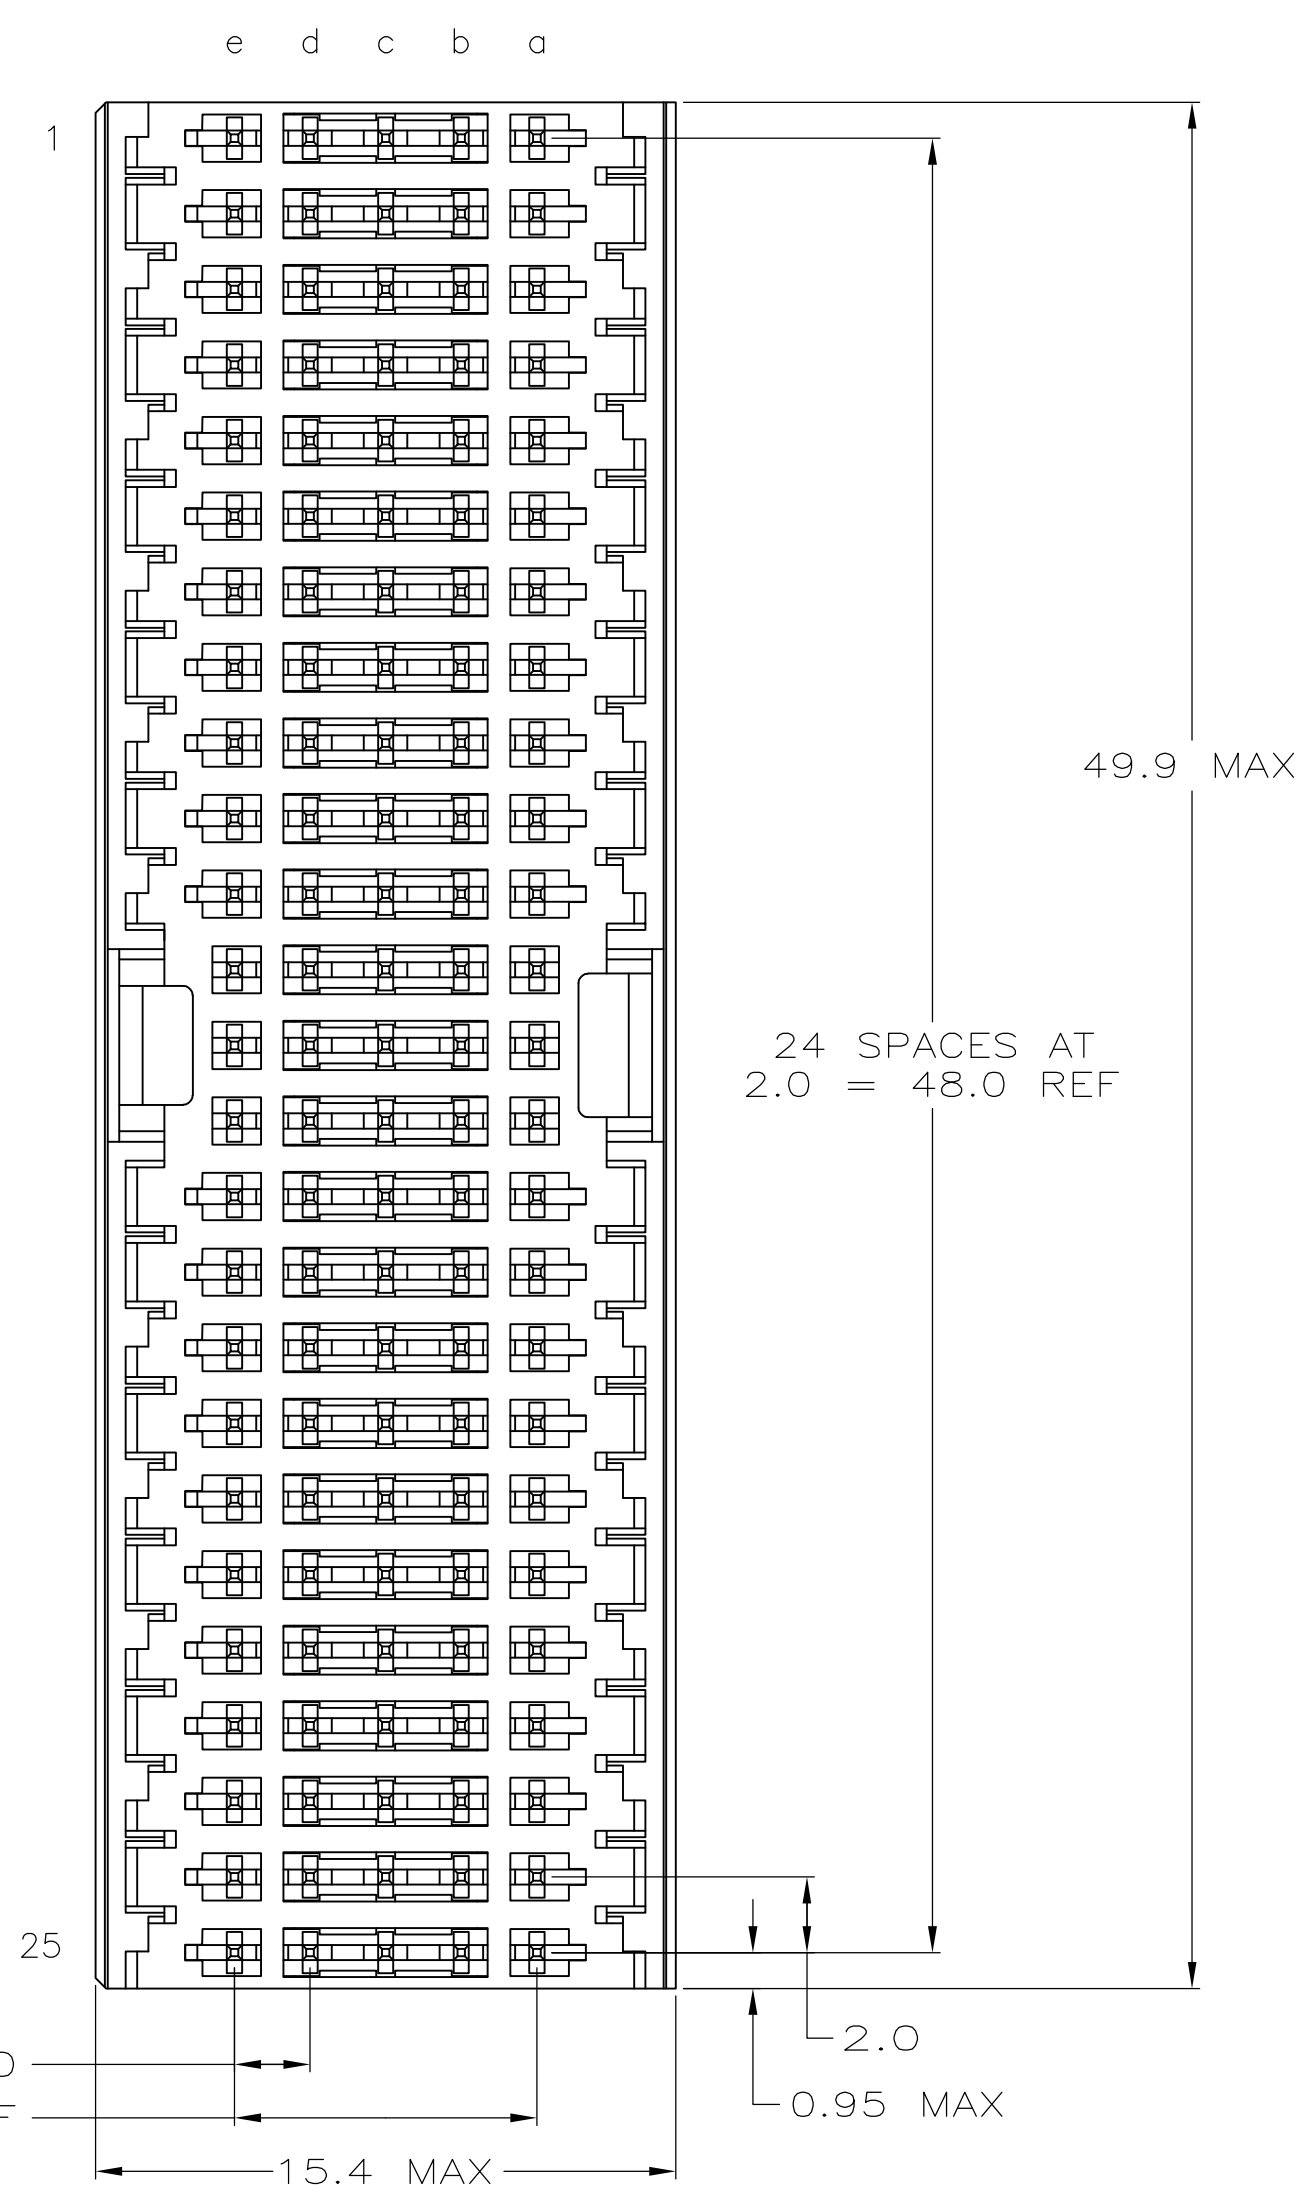


9

CONTACT LAYOUT

	e	d	c	b	a	
	1	1	1	1	1	1
	1	1	1	1	1	2
	1	1	1	1	1	3
	1	1	1	1	1	4
	1	1	1	1	1	5
	1	1	1	1	1	6
	1	1	1	1	1	7
	1	1	1	1	1	8
	1	1	1	1	1	9
	1	1	1	1	1	10
	1	1	1	1	1	11
	1	1	1	1	1	12
	1	1	1	1	1	13
	1	1	1	1	1	14
	1	1	1	1	1	15
	1	1	1	1	1	16
	1	1	1	1	1	17
	1	1	1	1	1	18
	1	1	1	1	1	19
	1	1	1	1	1	20
	1	1	1	1	1	21
	1	1	1	1	1	22
	1	1	1	1	1	23
	1	1	1	1	1	24
	1	1	1	1	1	25

OBSOLETE △11	△2 △6 △10	1-5646884-9
	△2 △5 △10	5646884-9
	△2 △4	5646884-4
	△2 △3	5646884-1
	FINISH	PART NUMBER

P.C.B. HOLE DIM. ACTION PIN DRILLED HOLE: $0,7 \pm 0,025 \text{ mm}$ FIN. HOLE : $0,55$ TO $0,65 \text{ mm}$ Cu-thks : $0,025$ TO $0,050 \text{ mm}$ SnPb-thks : $0,004$ TO $0,010 \text{ mm}$		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWH 29JUL05 CHK B.CARBO 29JUL05 APD B.CARBO 29JUL05		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		Z-PACK 2mm HM, TYPE A/B, 125 POSITION RIGHT ANGLE MALE CONNECTOR ASSEMBLY, INVERSE VERSION	
		± 0.2		PRODUCT SPEC —		SIZE A1	
		± 0.2		APPLICATION SPEC —		GAGE CODE 00779	
		± 0.2		WEIGHT —		DRAWING NO C-5646884	
MATERIAL 		FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 5:1	
						SHEET 1 OF 1 REV C	