

THIS DRAWING IS UNPUBLISHED


RELEASED FOR PUBLICATION

© COPYRIGHT - By -TE connectivity


ALL RIGHTS RESERVED.

CONNECTOR ASSEMBLY


EXEMPLARY LOADED

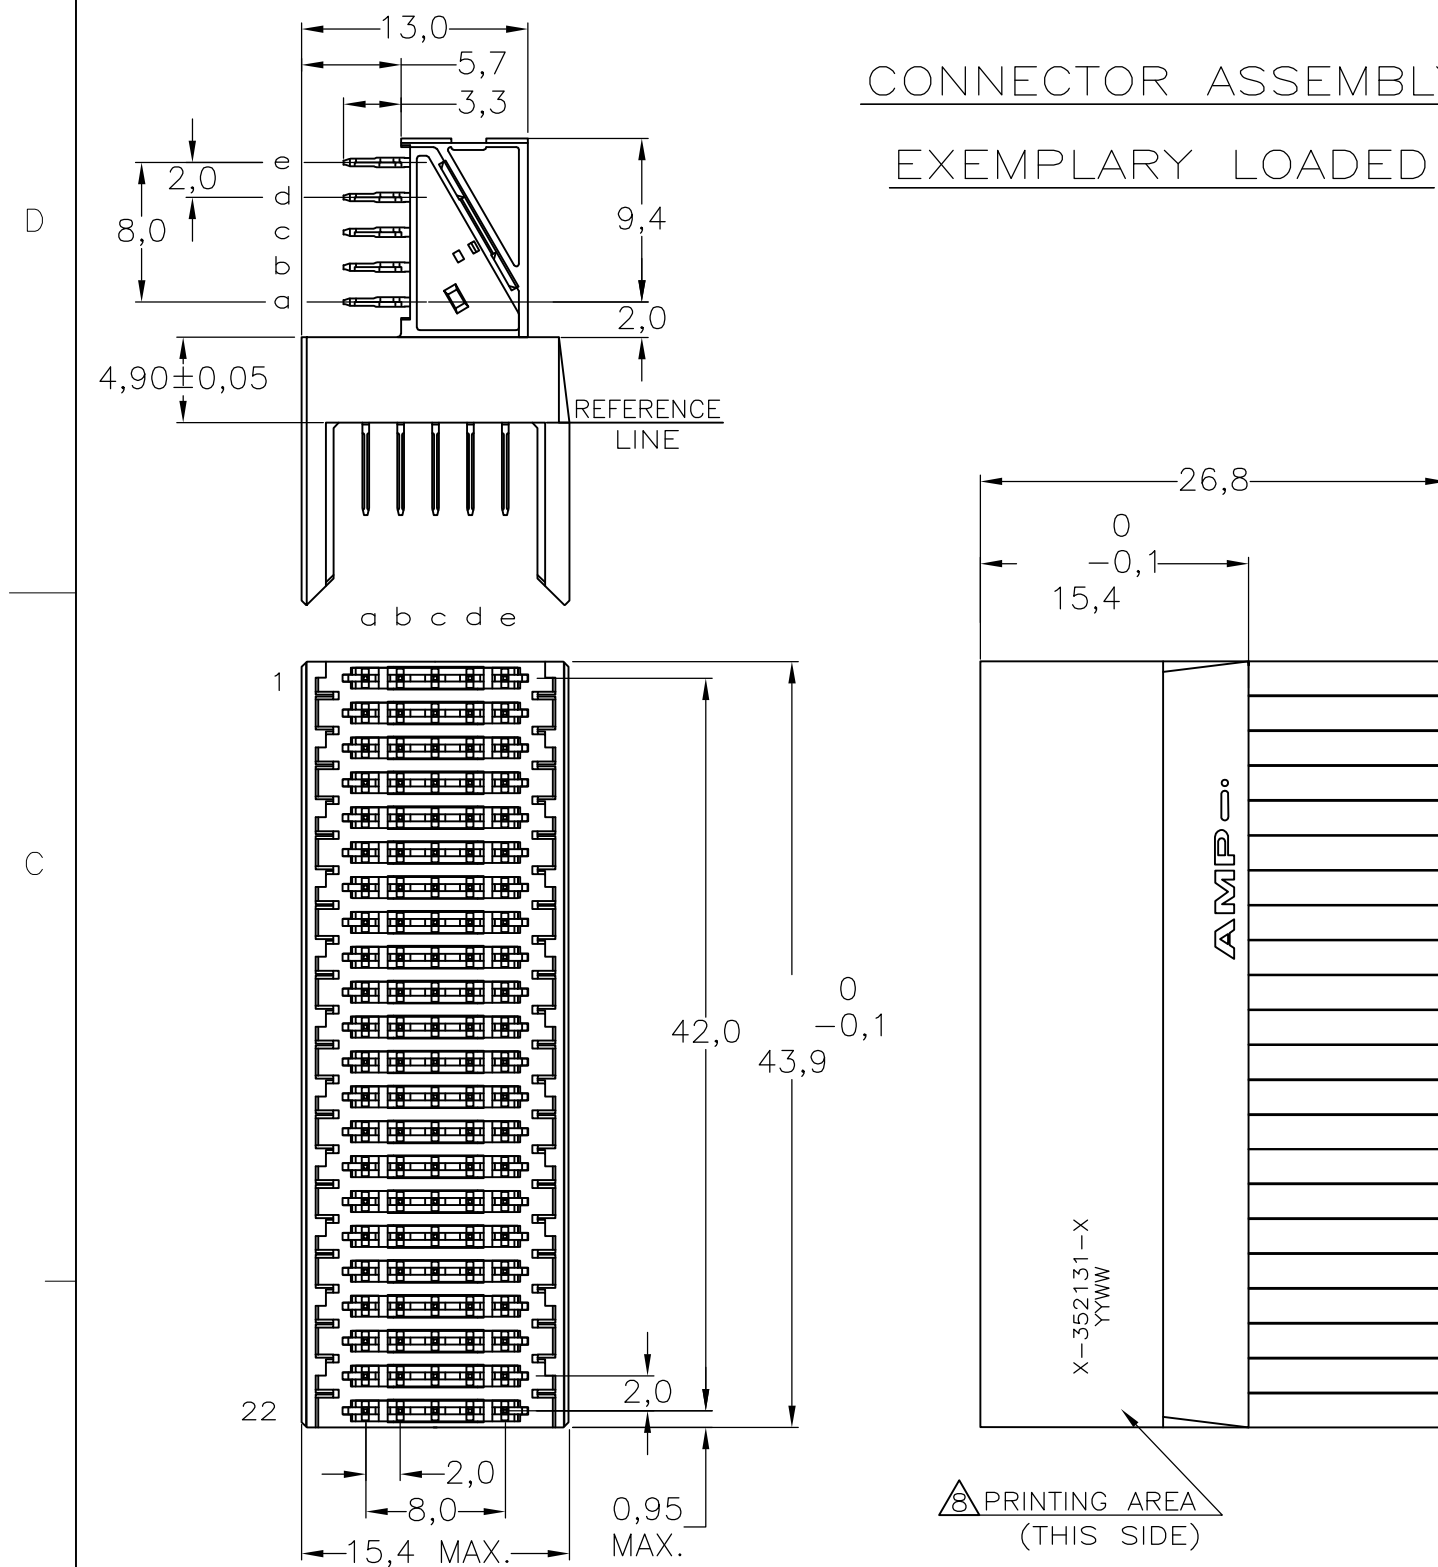

CONTACT DIMENSIONS

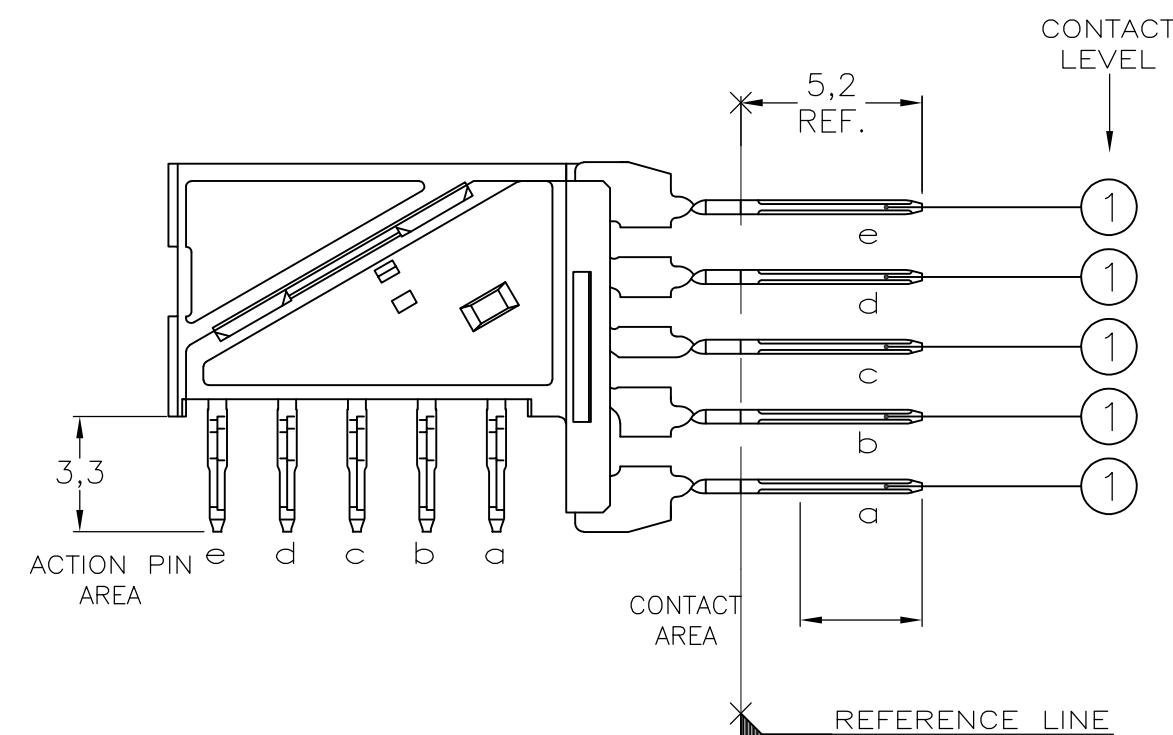

RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN

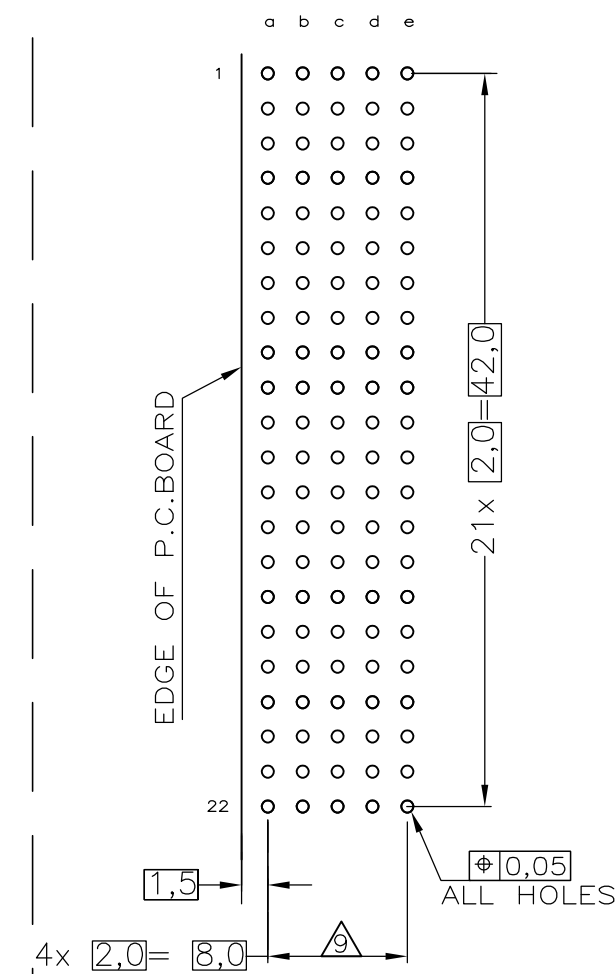

CONTACT LAYOUT

	a	b	c	d	e
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1
6	1	1	1	1	1
7	1	1	1	1	1
8	1	1	1	1	1
9	1	1	1	1	1
10	1	1	1	1	1
11	1	1	1	1	1
12	1	1	1	1	1
13	1	1	1	1	1
14	1	1	1	1	1
15	1	1	1	1	1
16	1	1	1	1	1
17	1	1	1	1	1
18	1	1	1	1	1
19	1	1	1	1	1
20	1	1	1	1	1
21	1	1	1	1	1
22	1	1	1	1	1

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE APPLICATION SPECIFICATION

NOTES:

- | | |
|----|--|
| 1 | MATERIAL HOUSING: GREY GLASSFILLED POLYESTER
UL 94 V-0
CONTACT: PHOSPHOR BRONZE |
| 2 | GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN.
AND ACTION PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER. |
| 3 | CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2. |
| 4 | CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1. |
| 5 | CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS. |
| 6 | CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS. |
| 7 | CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT. |
| 8 | CONNECTOR MARKED WITH PARTNUMBER AND DATECODE |
| 9 | PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. |
| 11 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |
| 12 | 0.76um MIN GOLD PLATING AT MATING AREA. |

	N	  	3-352131-0
 OBSOLETE	Y 	 	4-352131-9
	Y 	 	—352131-9
	N	 	—352131-4
	N	 	352131-1
	CONSERVATION TREATMENT	CONTACT FINISH	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.v.d.HEIJDEN 15DEC97	TREATMENT		TE Connectivity	
DIMENSIONS: mm		CHK D. TRUREN 15DEC97				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.v.KONINGSBRUGGE -	NAME			
		PRODUCT SPEC -	Z-PACK 2MM HM TYPE B22 110 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC 114-19029	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	A2	00779	C-352131	-
CUSTOMER DRAWING			SCALE	NTS	SHEET	1 OF 1
					REV	G2