


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED PER ECR-17-008430	12JUN2017	RS	SZ

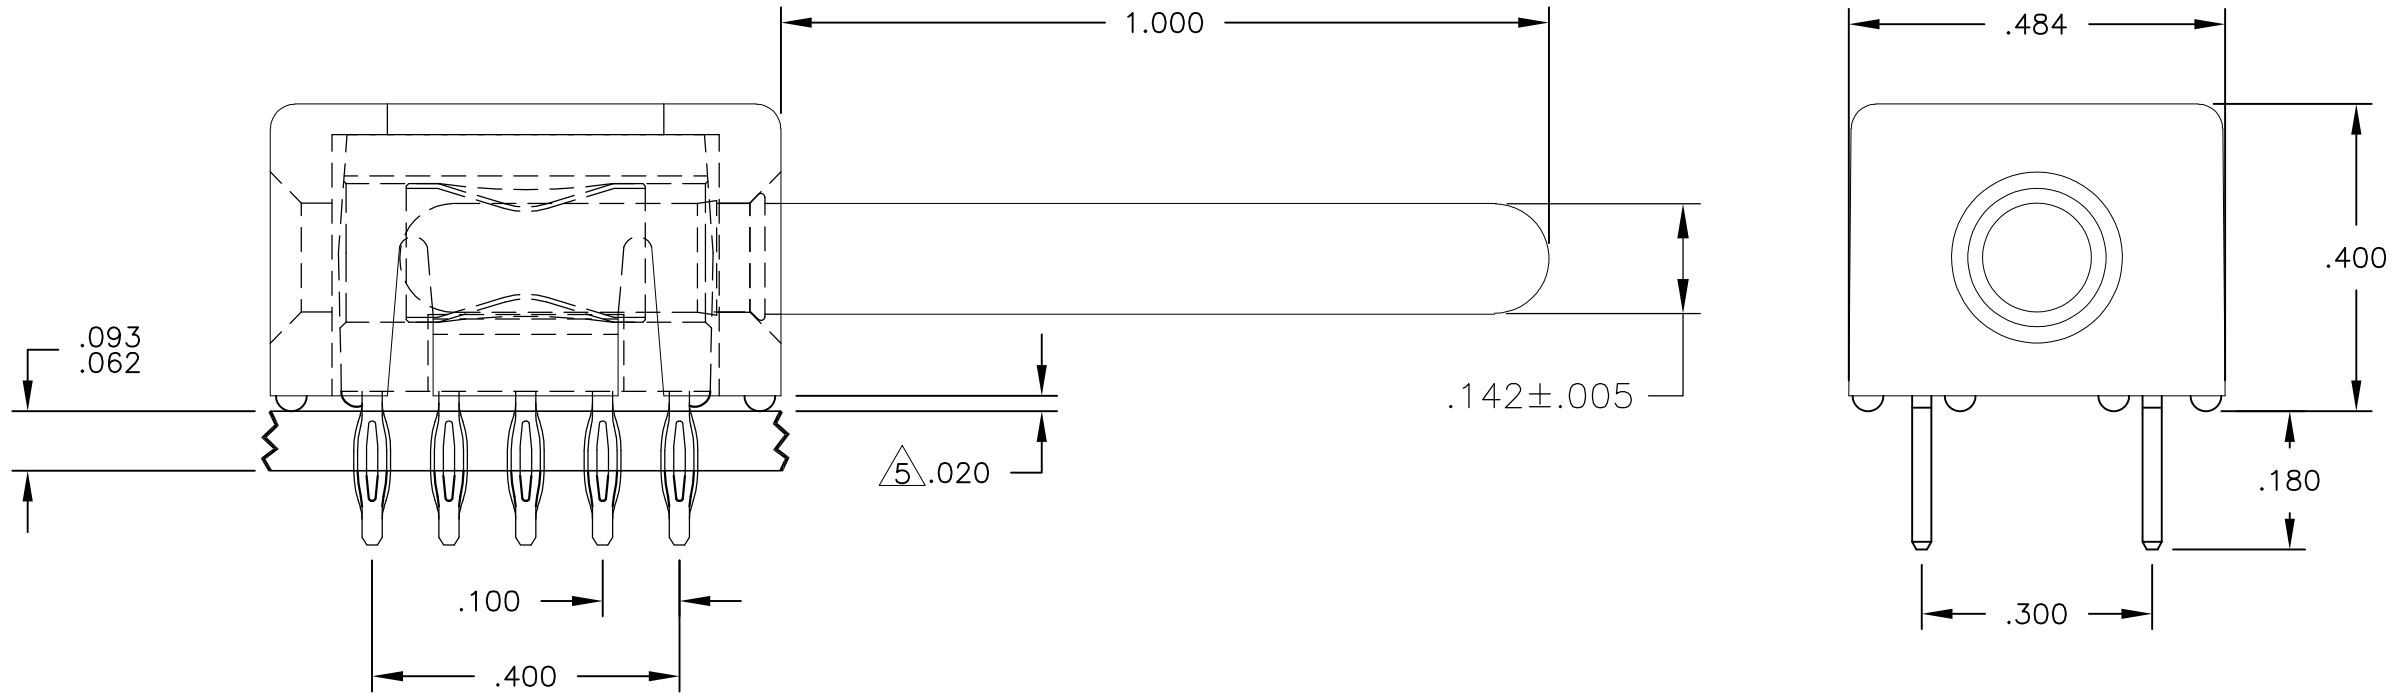

5 A FIVE-POUND (5lb) FORCES REQUIRED TO CORRECTLY SEAT THE CONNECTOR WITH PLATED THRU HOLES LESS THAN Ø.040 INCH.

4. FINISHES:

CROWN: GOLD PLATED, .000030 MIN THICK
OVER NICKEL PLATED, .000040 MIN THICK.

INSERT: SILVER PLATED, .000200 MIN THICK,
OVER NICKEL PLATED, .000040 MIN THICK.

COMPLIANT TAIL: SILVER PLATED, .000200 MIN THICK,
OVER NICKEL PLATED, .000040 MIN THICK.

CONTACT: SILVER PLATED, .000200 MIN THICK,
OVER NICKEL PLATED, .000040 MIN THICK.

3. MATERIAL:

INSULATOR - POLYESTER, GLASS FILLED, UL 94 V-0

MODULE - METAL CASTING


CROWN - BECU

PIN CONTACT - BRASS


COMPLIANT PIN - PHOSPHOR BRONZE

2. ITEMS PROVIDED TO THIS SPECIFICATION SHALL BE IDENTIFIED ON CONTAINER WITH THE FOLLOWING INFORMATION PART NUMBER AND DATE CODE OF MANUFACTURE.

1. PART NUMBER CHANGES AND/OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TE APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.

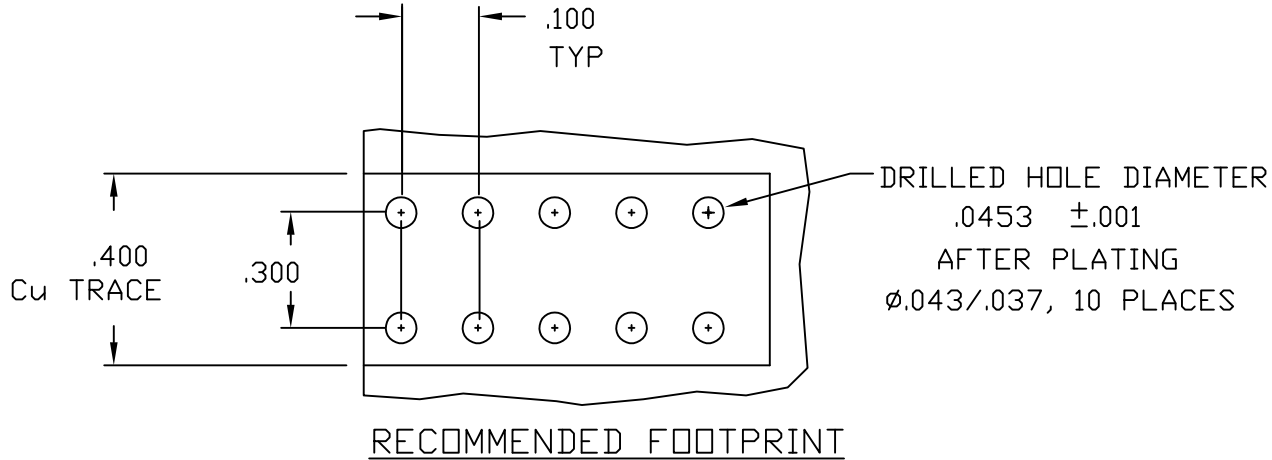

6643444-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12JAN2011 LOVATO/GRZYBOWSKI	 TE Connectivity		
DIMENSIONS: INCHES		CHK - ORRIS			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 12JAN2011 CHAU/ORRIS	NAME ICCON, PIN, PARALLEL, COMPLIANT TAIL NON LOCKING, 10 PIN FOOT PRINT		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .020 4 PLC ± - ANGLES ± .5	PRODUCT SPEC 108-128033			
	MATERIAL -	FINISH -	APPLICATION SPEC 114-13298	SIZE A3	CAGE CODE 00779
		WEIGHT 0	DRAWING NO C-6643444	RESTRICTED TO -	
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV C1